
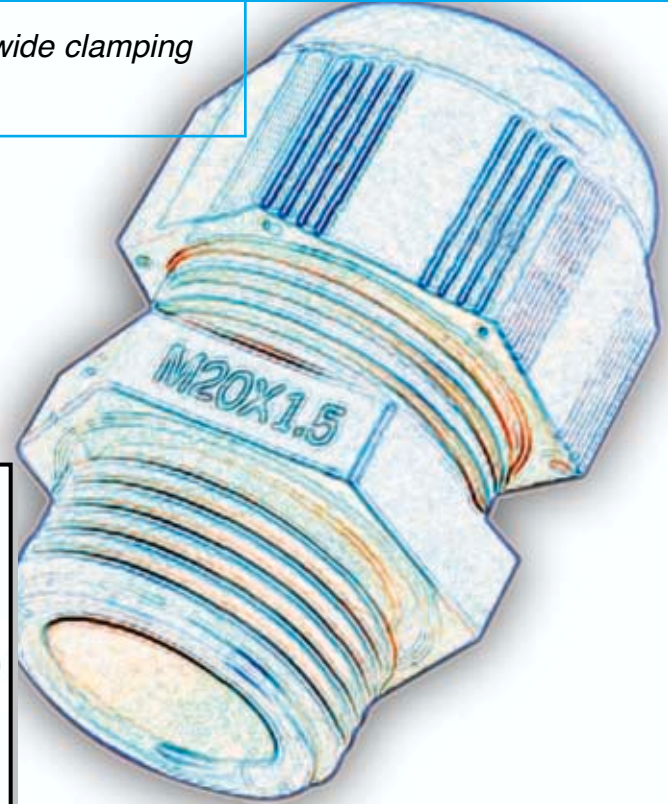


STANDARD SERIES METRIC THREAD CABLE GLANDS

Liquid tight, easy to assemble, good strain relief, wide clamping range, multipurpose applications, easy handling.

TECHNICAL DETAILS:

Material	Polyamide 6
Color	RAL 7001 (Gray) RAL 9005 (Black)
Protection Class	IP 68.5 bar
Temp. Range	-30°C to + 80°C permanent
Oper. Temperature	Up to + 150°C intermittent
Seal	Neoprene



Metric Thread Strain Relief Cord Connectors

Size	Part Number	Part Number	Thread Diameter	Thread Length	Wrenching Flats	Diameter Range	Diameter Range
M12 x 1.5	BM-0S	BM-2S	12	8	15	3.0 - 6.5	.118 - .256
M16 x 1.5	BM-01	BM-21	16	10	22	5.0 - 10.0	.197 - .394
M20 x 1.5	BM-02	BM-22	20	10	24	6.0 - 12.0	.236 - .473
M20 x 1.5	BM-03	BM-23	20	10	27	10.0 - 14.0	.394 - .552
M25 x 1.5	BM-05	BM-25	25	10	33	13.0 - 18.0	.512 - .709
M32 x 1.5	BM-07	BM-27	32	18	42	18.0 - 25.0	.709 - .985
M40 x 1.5	BM-08	BM-28	40	18	53	22.0 - 32.0	.866 - 1.26
M50 x 1.5	BM-09	BM-29	50	18	60	30.0 - 38.0	1.18 - 1.50
M63 x 1.5	BM-10	BM-30	63	18	65	34.0 - 44.0	1.34 - 1.74

Metric Thread Strain Relief Cord Connectors Glands With Reducer Bushings

Size	Part Number Gray	Part Number Black	Thread Diameter (mm)	Thread Length (mm)	Wrenching Flats (mm)	Diameter Range (mm)	Diameter Range (inches)
M12 x 1.5	BI-0S	BI-2S	12	8	15	2.0 - 5.0	.079 - .197
M16 x 1.5	BI-01	BI-21	16	10	22	3.0 - 7.0	.118 - .276
M20 x 1.5	BI-02	BI-22	20	10	24	5.0 - 9.0	.197 - .355
M25 x 1.5	BI-05	BI-25	25	10	33	9.0 - 14.0	.355 - .551
M32 x 1.5	BI-07	BI-27	32	18	42	12.0 - 20.0	.473 - .788
M40 x 1.5	BI-08	BI-28	40	18	53	20.0 - 26.0	.788 - 1.02
M50 x 1.5	BI-09	BI-29	50	18	60	25.0 - 31.0	.985 - 1.22
M63 x 1.5	BI-10	BI-30	63	18	65	29.0 - 35.0	1.14 - 1.37

Various colors, materials and sizes available upon request.

E-mail: info@sabcable.com



Web site: www.sabcable.com