


USB 2.0 Cables

SABIX® USB 2.0 R flex

Halogen-free continuous flex SABIX® USB 2.0 Rail cable

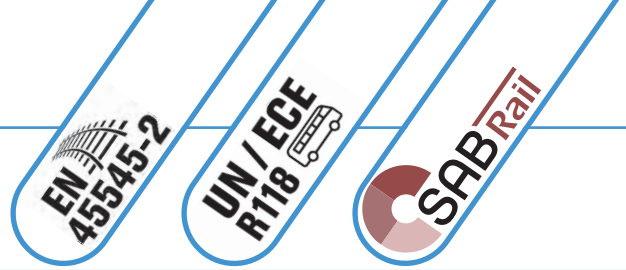

ES · D-VIERSEN · SABIX® USB 2.0 R flex 4x28AWG 6019013 

Marking for SABIX® USB 2.0 R flex 6019013:

SAB BRÖCKSKES · D-VIERSEN · SABIX® USB 2.0 R flex 4x28AWG 6019013

Construction:

Conductor:	bare copper strands, fine wires
Insulation:	SABIX®
Color code:	white, green, red, black
Shielding:	alu. foil + tinned copper braiding Drain AWG 30 of tinned copper under the braid
Jacket material:	SABIX®
Jacket color:	black (RAL 9005)

Outstanding features:

- low smoke halogen-free (LSHF)
- continuous flex
- no flame propagation
- flame retardant and self-extinguishing
- good oil and fuel resistance
- fulfills fire protection requirements R15 (EL1A) and R16 (EL1B) acc. to EN 45545-2 for hazard levels HL1-3
- flame retardant acc. to UN/ECE R118

Technical data:

Peak operating voltage:	max. 30V
Testing voltage:	conductor/conductor: 600 V conductor/shielding: 600 V
Min. bending radius:	<i>fixed installation:</i> 5 x O.D. <i>free movement:</i> 10 x O.D.
Temperature range:	<i>static:</i> -50/+90°C <i>flexible:</i> -50/+90°C
Halogen-free:	acc. to EN 50306-1 + EN 50264-1 are fulfilled. Development of HCl is < 0.5% acc. to IEC 60754-1. pH-value is > 4.3 acc. to IEC 60754-2. Conductivity is < 10.0 µS/mm acc. to IEC 60754-2. Fluoric content < 0.1% acc. to IEC 60684-2.
Burning characteristics:	No flame propagation acc. to IEC 60332-3-24 + VDE 0482-332-3-24 resp. IEC 60332-3-25 + VDE 0482-332-3-25 and EN 50305 + VDE 0260-305 section 9.1.2. Flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2 Flame retardant acc. to ISO 6722 (UN/ECE R118)
Toxicity:	acc. to EN 50305 + VDE 0260-305
Smoke density:	acc. to IEC 61034 + VDE 0482-1034
Oil and fuel resistance:	acc. to EN 50264-1 + VDE 0260-264-1
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30


item no.	type	dimensions AWG	outer-ø		cable weight ≈lbs/mft	ohmic resistance at 20°C max.Ω/km
			approx. inch	approx. mm		
▶ 6019013	SABIX® USB 2.0 R flex	28 (7 strand)/4c	0.205	5.2	28	223.8

Other dimensions and colors are available on request

Also possible as a cable assembly with USB type A or B plug



USB 2.0 cable with USB type A and USB type B plug

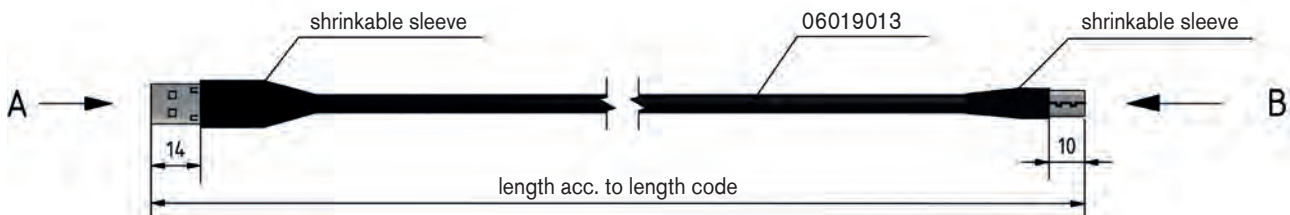


view A
(2:1)



Pin configuration

USB A	color code	USB B
1	red	1
2	white	2
3	green	3
4	black	4
housing	screen	housing

view B
(3:1)



view soldering side