

Metal Round Hole Plugs


Hole plug for sealing threaded holes

Metric & PG
Thread

Hole plugs are used where a pre-existing threaded hole exists with no cable that needs to be closed and protected. SAB offers a round nickel plated brass hole plug with PG and metric thread.

Technical data:

Material:	Brass, Nickel Plated
Protection:	IP 65, 5 Bar
Temperature range:	-30°C to +100°C

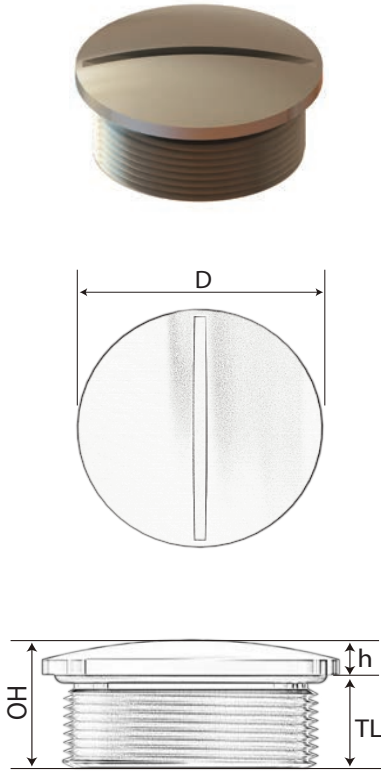


Part Number	Thread Type	Plug Diameter (D)		Thread Length (TL)		Height (H)		Overall Height (OH)	
		inches	mm	inches	mm	inches	mm	inches	mm
Metric:									
HPM-01	M12X1.5	0.591	15	0.236	6.0	0.098	2.5	0.334	8.5
HPM-02	M16X1.5	0.748	19	0.276	7.0	0.118	3.0	0.394	10
HPM-03	M20X1.5	0.906	23	0.315	8.0	0.118	3.0	0.433	11
HPM-04	M25X1.5	1.142	29	0.315	8.0	0.157	4.0	0.472	12
HPM-05	M32X1.5	1.417	36	0.354	9.0	0.157	4.0	0.511	13
HPM-06	M40X1.5	1.732	44	0.354	9.0	0.157	4.0	0.511	13
HPM-07	M50X1.5	2.126	54	0.354	9.0	0.197	5.0	0.551	14
HPM-08	M63X1.5	2.717	69	0.394	10.0	0.236	6.0	0.630	16
PG:									
HPM-09	PG 7	0.630	16	0.236	6.0	0.118	3.0	0.354	9
HPM-10	PG 9	0.748	19	0.236	6.0	0.118	3.0	0.354	9
HPM-11	PG 11	0.866	22	0.236	6.0	0.118	3.0	0.354	9
HPM-12	PG 13.5	0.945	24	0.256	6.5	0.118	3.0	0.374	9.5
HPM-13	PG 16	1.024	26	0.256	6.5	0.118	3.0	0.374	9.5
HPM-14	PG 21	1.299	33	0.276	7.0	0.157	4.0	0.433	11
HPM-15	PG 29	1.654	42	0.315	8.0	0.157	4.0	0.472	12
HPM-16	PG 36	2.047	52	0.354	9.0	0.236	6.0	0.590	15

* Available with O-Ring
+ Available in stainless steel

O-RINGS

Technical data:

Material: Butadiene-Nitrile 70 (NBR)

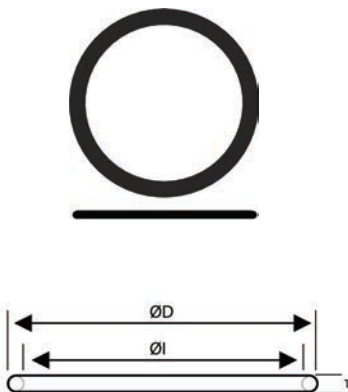

Part Number	metric	PG	NPT	O.D. (D)	I.D. (I)	thickness (T)
				inches	inches	inches
OR-12	M12 x 1.5	—	—	0.504	0.364	0.070
OR-07	—	PG 7	—	0.566	0.426	0.070
OR-38	M16 x 1.5	PG 9	NPT 3/8	0.629	0.489	0.070
OR-11	—	PG 11	—	0.754	0.614	0.070
OR-20	M20 x 1.5	—	—	0.816	0.676	0.070
OR-13	—	PG 13.5	NPT 1/2	0.879	0.739	0.070
OR-16	—	PG 16	—	0.941	0.801	0.070
OR-25	M25 x 1.5	—	—	1.004	0.864	0.070
OR-21	—	PG 21	NPT 3/4	1.129	0.989	0.070
OR-32	M32 x 1.5	—	—	1.181	1.024	0.079
OR-01	—	—	NPT 1	1.380	1.174	0.103
OR-40	M40 x 1.5	PG 29	NPT 1 1/4	1.569	1.362	0.103
OR-36	M50 x 1.5	PG 36	NPT 1 1/2	1.943	1.737	0.103
OR-42	—	PG 42	NPT 1 3/4	2.193	1.987	0.103
OR-48	M63 x 1.5	PG 48	NPT 2	2.443	2.237	0.103