


# POLYAMIDE LOCKNUTS

## METRIC, PG & NPT

Hexagonal locknuts made of polyamide, glass fiber reinforced.

### Technical details:

<b>Material:</b>	Polyamide 6 (30% Glass Fiber reinforced)
<b>Color:</b>	RAL 7001 (Gray) RAL 9005 (Black)
<b>Temperature range</b> <i>permanent:</i>	-20°C to +100°C
<i>intermittent:</i>	-30°C to +150°C
<b>Flammability:</b>	UL 94 HB

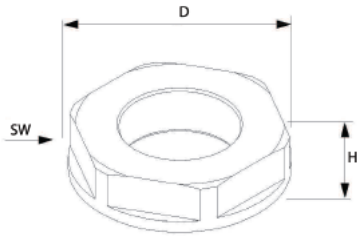

Part Number		Thread Type	Height (H)		Diameter (TD)		Wrenching Flats (SW)	
gray	black		inches	mm	inches	mm	inches	mm
<b>Metric</b>								
LMG-12	LMB-12	M12x1.5	0.197	5	0.768	19.5	0.709	18
LMG-16	LMB-16	M16x1.5	0.197	5	0.953	24.2	0.866	22
LMG-20	LMB-20	M20x1.5	0.236	6	1.126	28.6	1.024	26
LMG-25	LMB-25	M25x1.5	0.236	6	1.378	35.0	1.260	32
LMG-32	LMB-32	M32x1.5	0.276	7	1.815	46.1	1.614	41
LMG-40	LMB-40	M40x1.5	0.276	7	2.177	55.3	1.969	50
LMG-50	LMB-50	M50x1.5	0.315	8	2.602	66.1	2.362	60
LMG-63	LMB-63	M63x1.5	0.315	8	3.248	82.5	2.953	75
<b>PG</b>								
LPG-7	LPB-7	PG 7	0.197	5	0.827	21.0	0.748	19
LPG-9	LPB-9	PG 9	0.197	5	0.945	24.0	0.866	22
LPG-11	LPB-11	PG 11	0.197	5	1.024	26.0	0.945	24
LPG-13	LPB-13	PG 13.5	0.236	6	1.142	29.0	1.063	27
LPG-16	LPB-16	PG 16	0.236	6	1.299	33.0	1.181	30
LPG-21	LPB-21	PG 21	0.276	7	1.535	39.0	1.417	36
LPG-29	LPB-29	PG 29	0.276	7	1.969	50.0	1.811	46
LPG-36	LPB-36	PG 36	0.315	8	2.598	66.0	2.362	60
LPG-42	LPB-42	PG 42	0.315	8	2.874	73.0	2.559	65
LPG-48	LPB-48	PG 48	0.315	8	3.071	78.0	2.756	70
<b>NPT</b>								
LNG-3/8	LNB-3/8	NPT 3/8	0.276	7	0.984	25.0	0.866	22
LNG-1/2	LNB-1/2	NPT 1/2	0.276	7	1.201	30.5	1.063	27
LNG-3/4	LNB-3/4	NPT 3/4	0.276	7	1.476	37.5	1.299	33
LNG-1	LNB-1	NPT 1	0.276	7	1.831	46.5	1.614	41