
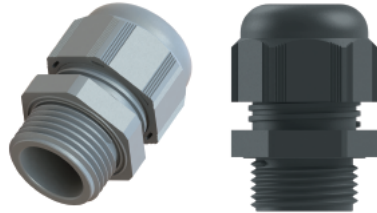


CG 100 METRIC POLYAMIDE CABLE GLANDS

METRIC THREAD

Liquid tight seal, fast and easy installation, wide clamping range, multi-purpose applications, easy handling.



Technical details:

Material:	Polyamide 6
Seal:	Chloroprene (CR)
Color:	RAL 7001 (gray) RAL 9005 (black)
Protection class:	IP 68 - 5 Bar
Temperature range	
<i>permanent:</i>	-20°C to +100°C
<i>intermittent:</i>	-30°C to +150°C
Flammability:	V2 (according to UL 94)
Approvals:	cURus, cULus, cCSAus, VDE, DNV-GL, CE

Part Number		Thread Type	Clamping Range Ø min-max		Thread Diameter (TD)		Wrenching Flats (SW)		Thread Length (TL)	Height (H)	UL
gray	black		inches	mm	inches	mm	inches	mm			
Metric											
PMG-12 ²	PMB-12	M12x1.5	.118 - .256	3.0 - 6.5	0.472	12	0.591	15	0.315	0.886	UR
PMG-16* ²	PMB-16*	M16x1.5	.197 - .394	5.0 - 10.0	0.630	16	0.866	22	0.394	1.181	UR
PMG-20*	PMB-20*	M20x1.5	.236 - .473	6.0 - 12.0	0.787	20	0.945	24	0.394	1.161	UL
PMG-20C*	PMB-20C*	M20x1.5	.394 - .552	10.0 - 14.0	0.787	20	1.063	27	0.394	1.220	UL
PMG-25* ²	PMB-25*	M25x1.5	.512 - .709	13.0 - 18.0	0.984	25	1.299	33	0.394	1.457	UL
PMG-32 ²	PMB-32	M32x1.5	.709 - .984	18.0 - 25.0	1.260	32	1.654	42	0.591	1.614	UL
PMG-40 ²	PMB-40	M40x1.5	.866 - 1.260	22.0 - 32.0	1.575	40	2.087	53	0.709	2.028	UL
PMG-50	PMB-50	M50x1.5	1.181 - 1.496	30.0 - 38.0	1.969	50	2.362	60	0.709	2.087	UL
PMG-63	PMB-63	M63x1.5	1.339 - 1.732	34.0 - 44.0	2.480	63	2.559	65	0.709	2.087	UL
Metric with Reducer Bushings											
PMG-12R	PMB-12R	M12x1.5	.079 - .197	2.0 - 5.0	0.472	12	0.591	15	0.315	0.886	UR ¹
PMG-16R*	PMB-16R*	M16x1.5	.118 - .276	3.0 - 7.0	0.630	16	0.866	22	0.394	1.181	UR ¹
PMG-20R*	PMB-20R*	M20x1.5	.197 - .355	5.0 - 9.0	0.787	20	0.945	24	0.394	1.161	UL ¹
PMG-20RC*	PMB-20RC*	M20x1.5	.276 - .473	7.0 - 12.0	0.787	20	1.063	27	0.394	1.220	UL ¹
PMG-25R*	PMB-25R*	M25x1.5	.354 - .630	9.0 - 16.0	0.984	25	1.299	33	0.394	1.457	UL ¹
PMG-32R	PMB-32R	M32x1.5	.472 - .788	12.0 - 20.0	1.260	32	1.654	42	0.591	1.614	UL ¹
PMG-40R	PMB-40R	M40x1.5	.788 - 1.024	20.0 - 26.0	1.575	40	2.087	53	0.709	2.028	UL ¹
PMG-50R	PMB-50R	M50x1.5	.984 - 1.220	25.0 - 31.0	1.969	50	2.362	60	0.709	2.087	UL ¹
PMG-63R	PMB-63R	M63x1.5	1.142 - 1.378	29.0 - 35.0	2.480	63	2.559	65	0.709	2.087	UL ¹

Locknut included

*Available with longer thread of 0.591". Add an "L" to end of the P/N.

¹Product is UR/UL tested to cCSAus

²Other clamping ranges available

E-mail: info@sabcable.com



Web site: www.sabcable.com