


Airport Equipment Cables

GP 400 SC

400 Hz Ground Power Supply Cable - SingleCore

for flexible application

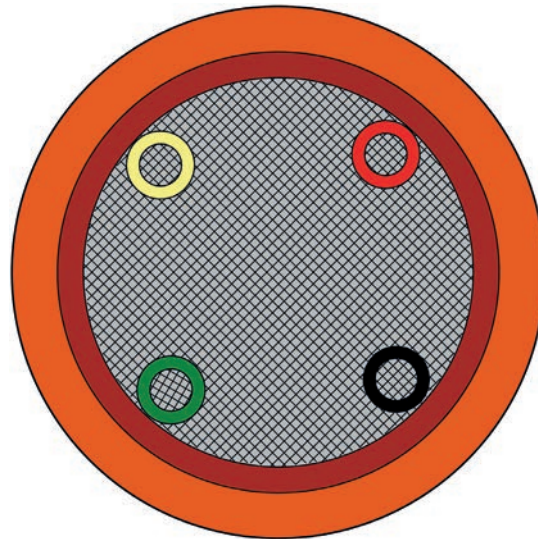

D
30

Application: For use in flexible applications, e.g. on mobile generators, in cable dispensers in the ground or on the passenger bridge.

Construction:

Conductor:	tinned copper strands
Insulation:	SABIX®
Color code:	control conductors: red, black, green, yellow power supply conductor: red
Stranding:	control conductors within the power supply conductor
Jacket material:	PUR
Jacket color:	orange
Marking:	SAB BRÖCKSKES · D-VIERSEN · GP 400 SC 50mm ² +4x1.0mm ² 34001321 CE and current meter marking

Outstanding features:

- low capacity insulation
- abrasion-resistant PUR jacket
- control conductors symmetrically arranged inside power supply conductor
- cold flexible
- halogen-free
- oil resistant
- weather resistant

Technical data:

Nominal voltage:	Uo/U 115/200 V
Max. permissible operating voltage*:	Uo/U 0.6/1 kV
Testing voltage:	conductor/conductor: 4000 V AC
Min. bending radius:	
<i>fixed installation:</i>	4 x O.D
<i>flexible application:</i>	6 x O.D
Temperature range:	
<i>static:</i>	-50/+90°C
<i>flexible*:</i>	-40/+90°C
Halogen-free:	acc. to IEC 60754-1 + VDE 0482-754-1
Oil resistance:	very good - TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Weather resistance:	very good
Approvals:	CE, EAC, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

* using all wires on one potential

item no.	AWG/c	outer-ø		cable weight ≈lbs/mft	DC resistance at 20°C max. Ω/km		voltage drop [mV/(A*m)]
		inch	mm				
▶ 34001321	2 AWG / 1c + 18 AWG/ 4c	0.614	15.6	394	2 AWG: 0.393 18 AWG: 20.000	2 AWG: 0.786 18 AWG: 40.0	
▶ 34001421	2/0 AWG / 1c + 18 AWG/ 4c	0.697	17.7	538	2/0 AWG: 0.277 18 AWG: 20.000	2/0 AWG: 0.554 18 AWG: 40.0	
▶ 34001521	3/0 AWG / 1c + 18 AWG/ 4c	0.772	19.6	693	3/0 AWG: 0.210 18 AWG: 20.000	3/0 AWG: 0.420 18 AWG: 40.0	

Other dimensions and colors are available on request

