


CABLES & TEMPERATURE MEASUREMENT FOR STEEL INDUSTRY



www.sabcable.com
866-722-2974 ■ info@sabcable.com

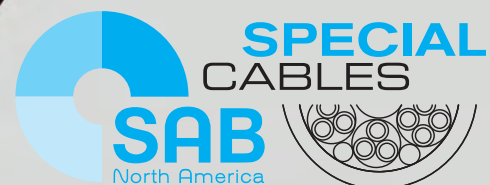

SAB North America

About Us



SAB North America is a focused supplier for the automation, aerospace, medical, high temperature, and robotics industries, providing cable solutions that meet, exceed, and set new standards in the flexible cable market. In addition to flexible cable products, we offer an extensive inventory of high-quality cable accessories including cord grips, grounding glands and other accessories that complement our flexible control and automation cables.

Whatever the need may be, look to SAB North America for Special Cables that can, for example, help minimize maintenance costs and increase productivity, reduce downtime, and solve specific problems. Here is a small sample of some of the challenges that Special Cables from SAB North America can help address:


- Hybrid designs for multiple functions
- Harsh environments
- Difficult applications
- Industry-specific requirements.



For application areas with very high temperatures, SAB has developed different heat-resistant cables and fire-resistant cables that can be optimized for use depending on the application. Temperature-resistant cables from SAB are often used in the steel industry, plastics processing, refrigeration, heating, and air conditioning technology, in the lamp and lighting industry or in sauna construction.

Depending on the application, you will find fire-resistant cables from SAB for fixed installation or for highly flexible, moving applications. By using heat-resistant materials such as glass silk, FEP, PFA, ETFE, Besilen® (silicone) and our halogen-free insulation and jacket material SABIX®, our cables can be used up to +400°C max.

Whether you're a valued distribution partner, an automation house, an integrator, or a contractor to the manufacturer, rest assured that our cables are reliable to maximize production efficiencies. SAB brings world class performance & 75 years of ingenuity to the table.

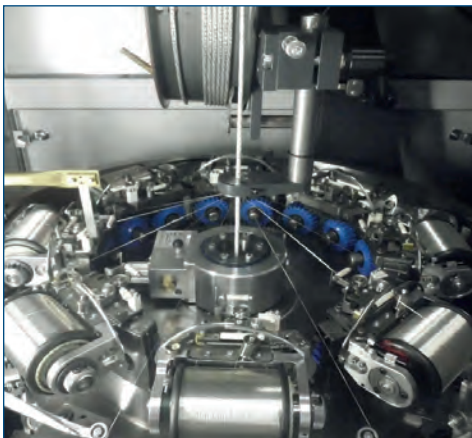

SAB Service Advantage...We make it Easy

- Engineering & technical assistance
- Cut to length with no cut charges
- Prepaid freight within US for orders over \$2,500
- Specialty cable designs (1500 ft minimum)
- No minimum on orders from stock
- Free drop shipments (no surcharges)
- 24-hour shipments from stock
- Cord Grips for securing and grounding cables

Production possibilities

Flexible cables and wires “Made in Germany”

As a leading manufacturer we develop and produce cables for industrial purposes. Our wide range of materials offer a lot of possibilities for your individual product requirement. The following survey shows an extract of our production possibilities:

Conductor Materials:

- ✓ bare copper
- ✓ tinned copper
- ✓ silver plated copper
- ✓ nickel plated copper
- ✓ nickel
- ✓ nickel pure
- ✓ compensating cable alloys

Insulation and Jacketing Materials:


- ✓ PVC
- ✓ Polyethylene
- ✓ Polypropylene
- ✓ Polyurethane
- ✓ TPE
- ✓ SABIX® (zero halogen)
- ✓ Besilen® - Silicone
- ✓ FEP, ETFE, PFA, PTFE
- ✓ PI foil
- ✓ Fiberglass

Temperature Ranges:

- Thermoplastic Elastomers
- ✓ -50°C up to +145°C
- SABIX®
- ✓ -50°C up to +220°C
- Besilen® - Silicone
- ✓ -40°C up to +220°C
- FEP, ETFE, PFA
- ✓ -90°C up to +260°C
- Fiberglass
- ✓ up to +600°C

Conductors:


- ✓ cross sections 0.055 - 300 mm²
- ✓ unshielded and shielded over 100 conductors

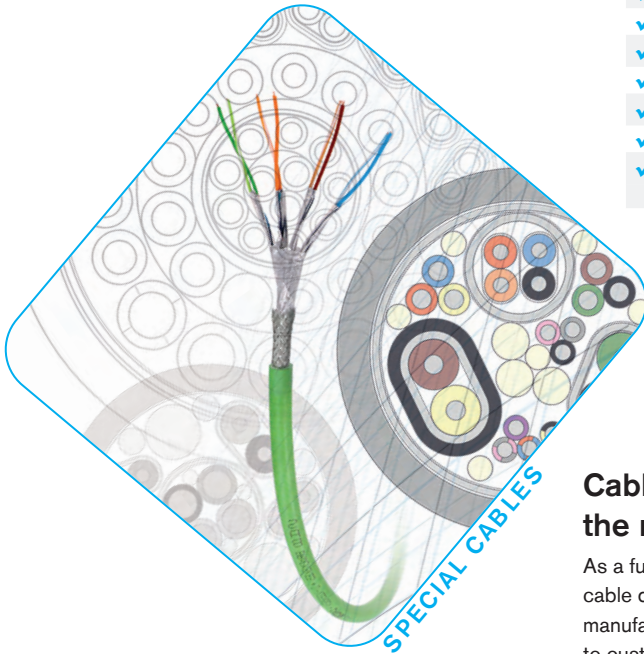

Cable assemblies directly from the manufacturer SAB:

As a full service partner, we are able to offer cable design and production as well as the manufacturing of cable assemblies according to customer's request. Please trust on our experience for decades in the treatment of cables and connectors.

- ✓ cable assemblies according to customer's demands
- ✓ complete cable assemblies
- ✓ UL certified assemblies
- ✓ helix cables
- ✓ HV measuring assemblies

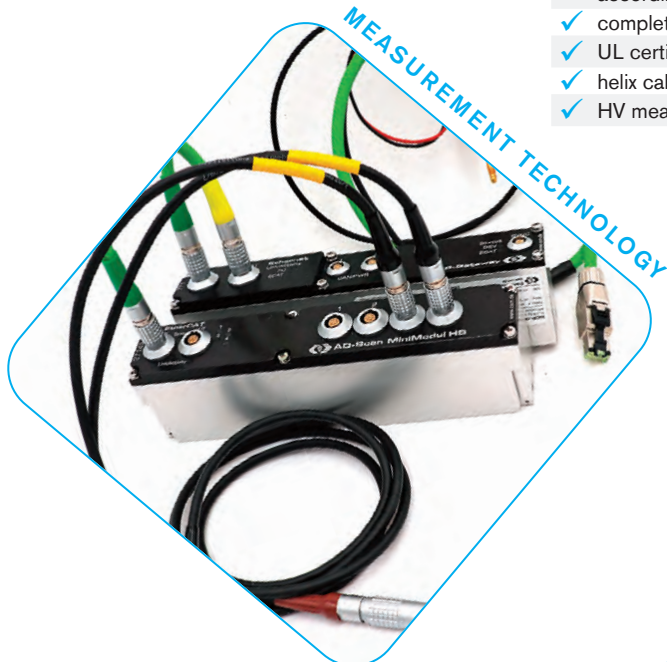

Measuring technology for industrial applications

Manufacturer of temperature sensors for industrial applications with 75 years of experience!

- ✓ mineral insulated thermocouples
- ✓ mineral insulated resistance thermometers
- ✓ temperature sensors
- ✓ mobile high voltage measuring technology
- ✓ temperature sensors for vehicle testing

Applications for the Steel Industry

Content

| | page |
|--|------|
| Steel Production | 6 |
| Besilen® - Silicone Cables | |
| ■ SC 113 Silicone insulated hook-up wire | 8 |
| ■ SC 123 Silicone insulated hook-up wire with fiberglass braid | 9 |
| ■ SC 600 HDTR Besilen® (silicone) insulated conductors with silicone outer jacket | 10 |
| ■ SC 600 HDTRS Besilen® insulated conductors with silicone outer jacket and steel wire armoring for mechanical protection | 11 |
| ■ BiHF/Cu/Bi-J Shielded Besilen® (silicone) insulated conductors with silicone outer jacket | 12 |
| Cable Track Cables | |
| ■ S 200 Continuous flex halogen-free polyurethane control cable with extreme temperature range | 13 |
| ■ S 200 C Continuous flex halogen-free polyurethane shielded control cable with extreme temperature range | 15 |
| ■ S 180 HT Continuous flex control cable with Besilen® (silicone) outer jacket for cable tracks | 17 |
| ■ S 180 C HT Continuous flex shielding control cable with Besilen® (silicone) outer jacket for cable tracks | 18 |
| Reeling Cables | |
| ■ DR 721 P Reeling cable for higher mechanical stress, 0.6/1 kV | 19 |
| ■ DR 720 P Highflex PUR reeling cable, 0.6/1 kV | 20 |
| Bus and Industrial Ethernet Cables | |
| ■ S PB 634 HT High temperature, Profibus-DP continuous flex cable | 21 |
| ■ S PB 634 HT Hybrid High temperature Profibus-DP continuous flex cable with supply conductors | 21 |
| ■ CATLine CAT 6A HT Gigabit Ethernet cable – high temperature resistant | 22 |
| ETFE, FEP, and PFA Cables | |
| ■ Li6Ybl FEP insulated stranded hook-up wire with bare copper strands, 375 V | 23 |
| ■ Li6Yvz FEP insulated stranded hook-up wire with tinned copper strands, 375 V | 23 |
| ■ LiPFAvn PFA insulated stranded hook-up wire with nickel-plated copper strands, 375 V | 23 |
| ■ Li7Ybl ETFE insulated stranded hook-up wire with bare copper strands, 900 V | 24 |
| ■ Li6Ybl FEP insulated stranded hook-up wire with bare copper strand, 900 V | 24 |
| ■ Li6Yvz FEP insulated stranded hook-up wire with tinned copper strands, 900 V | 24 |
| ■ LiPFAvn PFA insulated stranded hook-up wire with nickel-plated copper strands, 900 V | 24 |
| ■ TD 801 F FEP data cable with extended temperature range | 25 |
| ■ TD 833 CF FEP data cable with extended temperature range and overall copper shielding | 26 |
| ■ TD 838 CF TP FEP data cable, twisted pairs with extended temperature range and overall copper shielding | 27 |
| ■ TA 866 F FEP connection cable with extended temperature range | 28 |
| ■ TA 867 C FEP connection cable with extended temperature range and overall copper shielding | 29 |



Applications for the Steel Industry

Content

| | | page |
|---|---|------|
| Compensating and extension cables | | |
| ■ Th LGS | Th LGS with fiber-glass braiding and steel wire armoring | 30 |
| ■ Th LRS | Th LRS with special fiber-glass braiding and steel wire armoring | 30 |
| ■ A 18 L | FEP insulated compensating and extension cable, up to +180°C, shape round | 31 |
| ■ A 18-022 L | FEP insulated compensating and extension cable, up to +180°C, shape round | 31 |
| ■ A 19 L | FEP insulated compensating and extension cable with overall copper shield, up to +180°C, shape round | 31 |
| ■ A 19-022 L | FEP insulated compensating and extension cable with overall copper shield, up to +180°C, shape round | 31 |
| ■ A 3 Ln | Besilen® insulated compensating and extension cable, up to +180°C, shape oval | 32 |
| ■ A 4 Ln | Besilen® insulated compensating and extension cable with steel wire armoring, up to +180°C, shape oval | 32 |
| ■ A 11 Lr | Besilen® insulated compensating and extension cable with fiber-glass braiding and steel wire armoring, up to +180°C, shape round | 33 |
| ■ A 11-4 Lr | Besilen® insulated compensating and extension cable with fiber-glass braiding and steel wire armoring, up to +180°C, shape round | 33 |
| ■ A 11 Dr | Besilen® insulated compensating and extension cable with fiber-glass braiding and steel wire armoring, up to +180°C, shape round | 33 |
| Special Cables | | |
| ■ Special single conductor | Glass fiber insulated stranded wire with excellent temperature resistance | 34 |
| ■ Special connection cable | Connection cable with excellent temperature resistance | 35 |
| ■ Special connection cable | Silicone cable with fiber-glass braiding | 36 |
| ■ Festoon Cable | Besilen® (silicone) insulated connection cable with glass fiber braiding, inner jacket and overall copper shielding | 37 |
| ■ Smeltery Cable | Besilen® (silicone) insulated connection cable with glass fiber braiding and overall copper shielding | 38 |
| Temperature measurement in universal use | | |
| ■ Mineral insulated thermocouple with plug / plunge-in mineral insulated thermocouple with plug | | 39 |
| ■ Mineral insulated resistance thermometer with Lemo connection end | | 40 |
| ■ Mineral insulated thermocouple with cable | | 41 |
| ■ Beat in mineral insulated thermocouple with cable | | 42 |
| ■ Mineral insulated thermocouple with cable | | 43 |

Applications for the Steel Industry

The manufacturing processes of the steel production have to be controlled optimally. For the different production steps in smelting works and rolling mills special cables for optimum energy supply and data transmission are used. Cable track cables drive conveyor belts for iron ore, carbon or waste products. At the furnaces and between the different rollers special temperature resistant cables are of greatest importance.

An exact and reliable temperature measurement during the complete production process is of equal importance. The thermocouples installed at the different points of the casting implements transmit the measuring data via especially harnessed cables to a center from which the complete production process is controlled.

Coke Oven

- Reeling Cables
- ETFE, FEP, PFA Cables

Blast Furnace

- Besilen® (Silicone) Cables
- ETFE, FEP, PFA Cables
- Compensating and Extension Cables
- Cable Track Cables
- Festoon Cables

Direct Reduction

- Cable Track Cables

Electric Arc Furnace

- Besilen® (Silicone) Cables
- Control and Connection Cables

Basic Oxygen Furnace

- Reeling Cables
- Besilen® (Silicone) Cables
- Control and Connection Cables

Steel Refining Facility

- Control and Connection Cables
- Cable Track Cables

Pig Iron Casting

- Cable Track Cables

Continuous Casting

- Control and Connection Cables
- Harnessed cables
- Mineral insulated thermocouples
- Festoon Cables

Hot Rolling Mill


- Cable Track Cables
- Besilen® (Silicone) Cables
- Reeling Cables

Cold Rolling Mill

- Compensating and Extension Cables
- Besilen® (Silicone) Cables
- Reeling Cables

Transport and Crane Systems / Conveyor Belts

- Control and Connection Cables
- Cable Track Cables
- Festoon Cables
- Smeltery Cables

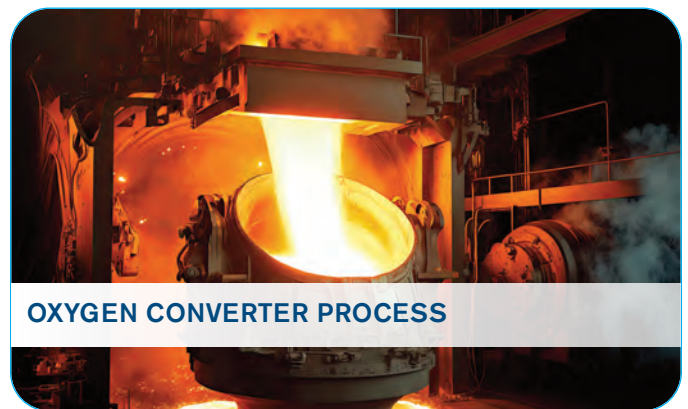



DUMPING STEEL SLAG



BUCKET TRANSPORTATION OVERHEAD CRANE



PRODUCTION PROCESS IN ROLLING MILL



STEEL ROLLING PRESS



HOT STEEL ON CONVEYOR



HOT STEEL ROLL



WASHING PROCESS FOR STEEL WIRE RODS




GALVANIZED STEEL SHEET ON CONVEYOR

Besilen® - Silicone Cables

SC 113

Silicone insulated hook-up wire



Construction:

| | |
|--------------------|---|
| Conductor: | tinned copper strands acc. to IEC 60228, VDE 0295, class 5 |
| Insulation: | Besilen® EI2 acc. to DIN EN 50363-1 |

Outstanding features:



- halogen-free
- flexible at low temperatures
- heat resistant

Technical data:

| | |
|--|--|
| Nominal voltage: | U ₀ /U 300/500 V |
| Testing voltage: | 2000 V |
| Min. bending radius: | 7.5 x O.D. |
| Radiation resistance: | 2 x 10 ⁷ cJ/kg |
| Temperature range: | |
| <i>static:</i> | -40/+180°C |
| <i>flexible:</i> | -25/+180°C |
| <i>short-term use:</i> | +250°C |
| Halogen-free: | acc. to DIN VDE 0472 part 815 and IEC 60754-1 |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + EN 60332-1-2 |
| Corrosiveness of conflagration gases: | in compliance with IEC 60754-2 + EN 50267-2-2 + VDE 0482 part 267-2-2- no development of corrosive conflagration gases |
| Chemical resistance: | see page O/11 |
| Weather resistance: | very good |
| Approvals: | CE, RoHS |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 |

| item no. | mm ² | AWG | outer-ø | | cable weight ≈ lbs/mft | |
|--------------|-----------------|---------|--------------|------------|---------------------------|------|
| | | | ±10% inch | ±10% mm | | |
| ▶ 113002...* | 0.25 | 24 | (≈ 14/34) | 0.067 | 1.7 | 3 |
| ▶ 113003...* | 0.34 | 22 | (≈ 7/30) | 0.071 | 1.8 | 4 |
| ▶ 113005...* | 0.50 | 20 | (≈ 16/32) | 0.075 | 1.9 | 5 |
| ▶ 113007...* | 0.75 | 19 | (≈ 23/32) | 0.087 | 2.2 | 7 |
| ▶ 113010...* | 1.00 | 18 | (≈ 30/32) | 0.091 | 2.3 | 9 |
| ▶ 113015...* | 1.50 | 16 | (≈ 27-29/30) | 0.110 | 2.8 | 12 |
| ▶ 113025...* | 2.50 | 14 | (≈ 46/30) | 0.134 | 3.4 | 19 |
| ▶ 113040...* | 4.00 | 12 | (≈ 52/28) | 0.157 | 4.0 | 30 |
| ▶ 113060...* | 6.00 | 10 | (≈ 78/28) | 0.177 | 4.5 | 42 |
| ▶ 113100...* | 10.00 | 8 | (≈ 77/26) | 0.240 | 6.1 | 72 |
| ▶ 113160...* | 16.00 | 6 | (≈ 122/26) | 0.295 | 7.5 | 112 |
| ▶ 113250...* | 25.00 | 4 | (≈ 190/26) | 0.366 | 9.3 | 182 |
| ▶ 113350...* | 35.00 | 2 | (≈ 272/26) | 0.421 | 10.7 | 253 |
| ▶ 113500...* | 50.00 | 1 | (≈ 400/26) | 0.484 | 12.3 | 351 |
| ▶ 113700...* | 70.00 | 2/0 | (≈ 543/26) | 0.575 | 14.6 | 479 |
| ▶ 113950...* | 95.00 | 3/0 | (≈ 484/24) | 0.689 | 17.5 | 646 |
| ▶ 113120...* | 120.00 | 4/0 | (≈ 589/24) | 0.748 | 19.0 | 791 |
| ▶ 113150...* | 150.00 | 250 MCM | (≈ 740/24) | 0.823 | 20.9 | 982 |
| ▶ 113185...* | 185.00 | 350 MCM | (≈ 902/24) | 0.906 | 23.0 | 1200 |
| ▶ 113240...* | 240.00 | 450 MCM | (≈ 1220/24) | 1.059 | 26.9 | 1615 |
| ▶ 113300...* | 300.00 | 550 MCM | (≈ 1525/24) | 1.181 | 30.0 | 2015 |

Other dimensions and colors are available on request

* Color code for single conductors:

- | | |
|---------------------|----------------------|
| ...0 = green/yellow | ...4 = gray |
| ...1 = blue | ...5 = white |
| ...2 = black | ...6 = reddish brown |
| ...3 = brown | ...7 = red |

Besilen® - Silicone Cables

SC 123

Silicone insulated hook-up wire with fiberglass braid



Construction:

| | |
|------------------------|---|
| Conductor: | tinned copper strands acc. to IEC 60228, VDE 0295, class 5 |
| Insulation: | Besilen® EI2 acc. to DIN EN 50363-1 |
| Standard color: | nature |
| Braiding: | fiberglass |
| Impregnation: | impregnating lacquer |

Outstanding features:



- halogen-free
- flexible at low temperatures
- heat resistant
- fiberglass braid for additional protection

Technical data:

| | |
|--|---|
| Nominal voltage: | U ₀ /U 300/500 V |
| Testing voltage: | 2000 V |
| Min. bending radius: | 7.5 x O.D. |
| Radiation resistance: | 2 x 10 ⁷ cJ/kg |
| Temperature range: | |
| <i>static:</i> | -40/+180°C |
| <i>flexible:</i> | -25/+180°C |
| <i>short-term use:</i> | +250°C |
| Halogen-free: | acc. to DIN VDE 0472 part 815 and IEC 60754-1 |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + EN 60332-1-2 |
| Corrosiveness of conflagration gases: | in compliance with IEC 60754-2 + EN 50267-2-2 + VDE 0482 part 267-2-2- no development of corrosive conflagration gases |
| Approvals: | CE, RoHS |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 |

| item no. | mm ² | AWG | outer-ø | | cable weight ≈lbs/mft | |
|-----------|-----------------|-----|--------------|------------|--------------------------|-----|
| | | | ±10% inch | ±10% mm | | |
| ▶ 1230050 | 0.50 | 20 | (≈ 16/32) | 0.094 | 2.4 | 7 |
| ▶ 1230070 | 0.75 | 19 | (≈ 23/32) | 0.106 | 2.7 | 11 |
| ▶ 1230100 | 1.00 | 18 | (≈ 30/32) | 0.110 | 2.8 | 12 |
| ▶ 1230150 | 1.50 | 16 | (≈ 27-29/30) | 0.126 | 3.2 | 15 |
| ▶ 1230250 | 2.50 | 14 | (≈ 46/30) | 0.154 | 3.9 | 24 |
| ▶ 1230400 | 4.00 | 12 | (≈ 52/28) | 0.177 | 4.5 | 34 |
| ▶ 1230600 | 6.00 | 10 | (≈ 78/28) | 0.205 | 5.2 | 50 |
| ▶ 1231000 | 10.00 | 8 | (≈ 77/26) | 0.287 | 7.3 | 91 |
| ▶ 1231600 | 16.00 | 6 | (≈ 122/26) | 0.327 | 8.3 | 133 |
| ▶ 1232500 | 25.00 | 4 | (≈ 190/26) | 0.402 | 10.2 | 206 |
| ▶ 1233500 | 35.00 | 2 | (≈ 272/26) | 0.449 | 11.4 | 271 |
| ▶ 1235000 | 50.00 | 1 | (≈ 400/26) | 0.555 | 14.1 | 384 |
| ▶ 1237000 | 70.00 | 2/0 | (≈ 543/26) | 0.594 | 15.1 | 509 |
| ▶ 1239500 | 95.00 | 3/0 | (≈ 484/24) | 0.728 | 18.5 | 702 |

Other dimensions and colors are available on request


Besilen® - Silicone Cables

SC 600 HDTR

Besilen® (silicone) insulated conductors with silicone outer jacket

also possible
with extremely notch
resistant jacket

535 150°C 600V CSA AWM I/II A 150°C 600V FT1 FT2 CE



Marking for SC 600 HDTR 1271804:

SAB BRÜCKSKES · D-VIERSEN · SC 600 HDTR AWM Style 4535 150°C 600V CSA AWM I/II A 150°C 600V FT1 FT2 CE

Construction:

| | |
|-------------------------|---|
| Conductor: | tinned copper strands acc. to IEC 60228, VDE 0295, class 5 |
| Insulation: | Besilen® EI2 acc. to EN 50363-1 + VDE 0207-363-1 |
| Color code: | up to 5 conductors- HD 308, see below from 6 conductors- black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334 from 3 conductors- a green/yellow ground |
| Stranding: | in layers |
| Jacket material: | Besilen® better than EM9 acc. to EN 50363-2-1 + VDE 0207-363-2-1 |
| Jacket color: | reddish brown (similar RAL 3016) |

Outstanding features:

- halogen-free
- flexible at low temperatures
- heat resistant
- UL recognized and CSA approved

Technical data:

| | | |
|--|--|---|
| Nominal voltage: | Uo/U 300/500 V | |
| Voltage UL/CSA: | 600 V | |
| Testing voltage: | conductor/conductor: 2000 V | |
| Min. bending radius: | 4 x O.D. <i>fixed installation:</i> 6 x O.D. <i>free movement:</i> | |
| Radiation resistance: | 2 x 10 ⁷ cJ/kg | |
| Temperature range: | DIN VDE -40/+180°C +200°C (2000h) <i>flexible:</i> -25/+180°C <i>short-term use:</i> +250°C | UL/CSA: up to +150°C Style 4535 |
| Halogen-free: | acc. to IEC 60754-1 + VDE 0482-754-1 | |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, CSA FT1, FT2 | |
| Corrosiveness of conflagration gases: | IEC 60754-2 + VDE 0482-754-2 - no development of corrosive conflagration gases | |
| Approvals: | UR AWM, CSA AWM, CE, RoHS | |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 | |

| item no. | no. of conductors incl. ground | outer-ø ±10% inch | ±10% mm | cable weight ≈lbs/mft |
|---|--------------------------------------|-------------------------|------------|-----------------------------|
| ▶ 20 AWG (≈ 16/32) ▪ 0.50 mm² | | | | |
| 1272002 | 2 | 0.220 | 5.6 | 26 |
| 1272003 | 3 | 0.232 | 5.9 | 30 |
| 1272004 | 4 | 0.248 | 6.3 | 36 |
| 1272005 | 5 | 0.272 | 6.9 | 42 |
| 1272007 | 7 | 0.295 | 7.5 | 53 |
| 1272008 | 8 | 0.339 | 8.6 | 61 |
| 1272010 | 10 | 0.366 | 9.3 | 73 |
| 1272012 | 12 | 0.378 | 9.6 | 83 |
| 1272016 | 16 | 0.417 | 10.6 | 105 |
| 1272018 | 18 | 0.441 | 11.2 | 117 |
| 1272024 | 24 | 0.516 | 13.1 | 161 |
| ▶ 19 AWG (≈ 23/32) ▪ 0.75 mm² | | | | |
| 1271902 | 2 | 0.232 | 5.9 | 31 |
| 1271903 | 3 | 0.252 | 6.4 | 36 |
| 1271904 | 4 | 0.272 | 6.9 | 44 |
| 1271905 | 5 | 0.299 | 7.6 | 52 |
| 1271907 | 7 | 0.323 | 8.2 | 66 |
| 1271908 | 8 | 0.374 | 9.5 | 76 |
| 1271910 | 10 | 0.406 | 10.3 | 91 |
| 1271912 | 12 | 0.417 | 10.6 | 104 |
| 1271916 | 16 | 0.465 | 11.8 | 132 |
| 1271918 | 18 | 0.492 | 12.5 | 148 |
| 1271924 | 24 | 0.583 | 14.8 | 206 |
| ▶ 18 AWG (≈ 30/32) ▪ 1.00 mm² | | | | |
| 1271802 | 2 | 0.248 | 6.3 | 34 |
| 1271803 | 3 | 0.260 | 6.6 | 42 |
| 1271804 | 4 | 0.283 | 7.2 | 50 |
| 1271805 | 5 | 0.307 | 7.8 | 60 |
| 1271807 | 7 | 0.335 | 8.5 | 77 |
| 1271808 | 8 | 0.386 | 9.8 | 89 |
| 1271810 | 10 | 0.421 | 10.7 | 106 |
| 1271812 | 12 | 0.433 | 11.0 | 122 |
| 1271816 | 16 | 0.480 | 12.2 | 157 |
| 1271818 | 18 | 0.512 | 13.0 | 176 |
| 1271824 | 24 | 0.626 | 15.9 | 255 |

| item no. | no. of conductors incl. ground | outer-ø ±10% inch | ±10% mm | cable weight ≈lbs/mft |
|--|--------------------------------------|-------------------------|------------|-----------------------------|
| ▶ 16 AWG (≈ 27-29/30) ▪ 1.50 mm² | | | | |
| 1271602 | 2 | 0.280 | 7.1 | 46 |
| 1271603 | 3 | 0.295 | 7.5 | 56 |
| 1271604 | 4 | 0.315 | 8.0 | 67 |
| 1271605 | 5 | 0.350 | 8.9 | 81 |
| 1271607 | 7 | 0.382 | 9.7 | 105 |
| 1271608 | 8 | 0.449 | 11.4 | 122 |
| 1271610 | 10 | 0.496 | 12.6 | 150 |
| 1271612 | 12 | 0.512 | 13.0 | 173 |
| 1271616 | 16 | 0.583 | 14.8 | 229 |
| 1271618 | 18 | 0.614 | 15.6 | 255 |
| 1271624 | 24 | 0.724 | 18.4 | 339 |
| ▶ 14 AWG (≈ 46/30) ▪ 2.50 mm² | | | | |
| 1271402 | 2 | 0.335 | 8.5 | 68 |
| 1271403 | 3 | 0.354 | 9.0 | 85 |
| 1271404 | 4 | 0.386 | 9.8 | 104 |
| 1271405 | 5 | 0.437 | 11.1 | 129 |
| 1271407 | 7 | 0.476 | 12.1 | 168 |
| 1271408 | 8 | 0.563 | 14.3 | 197 |
| 1271410 | 10 | 0.622 | 15.8 | 241 |
| 1271412 | 12 | 0.642 | 16.3 | 279 |
| 1271416 | 16 | 0.720 | 18.3 | 363 |
| 1271418 | 18 | 0.760 | 19.3 | 403 |
| 1271424 | 24 | 0.913 | 23.2 | 597 |
| ▶ 12 AWG (≈ 52/28) ▪ 4.00 mm² | | | | |
| 1271202 | 2 | 0.382 | 9.7 | 91 |
| 1271203 | 3 | 0.417 | 10.6 | 124 |
| 1271204 | 4 | 0.457 | 11.6 | 155 |
| 1271205 | 5 | 0.508 | 12.9 | 189 |
| 1271207 | 7 | 0.555 | 14.1 | 248 |
| ▶ 10 AWG (≈ 78/28) ▪ 6.00 mm² | | | | |
| 1271002 | 2 | 0.441 | 11.2 | 134 |
| 1271003 | 3 | 0.461 | 11.7 | 167 |
| 1271004 | 4 | 0.512 | 13.0 | 212 |
| 1271005 | 5 | 0.563 | 14.3 | 256 |
| 1271007 | 7 | 0.630 | 16.0 | 348 |

| item no. | no. of conductors incl. ground | outer-ø ±10% inch | ±10% mm | cable weight ≈lbs/mft |
|--|--------------------------------------|-------------------------|------------|-----------------------------|
| ▶ 8 AWG (≈ 77/26) ▪ 10.00 mm² | | | | |
| 1270802 | 2 | 0.575 | 14.6 | 228 |
| 1270803 | 3 | 0.610 | 15.5 | 291 |
| 1270804 | 4 | 0.669 | 17.0 | 363 |
| 1270805 | 5 | 0.744 | 18.9 | 443 |
| 1270807 | 7 | 0.831 | 21.1 | 601 |
| ▶ 6 AWG (≈ 122/26) ▪ 16.00 mm² | | | | |
| 1270602 | 2 | 0.669 | 17.0 | 329 |
| 1270603 | 3 | 0.736 | 18.7 | 429 |
| 1270604 | 4 | 0.807 | 20.5 | 537 |
| 1270605 | 5 | 0.823 | 20.9 | 650 |
| 1270607 | 7 | 1.012 | 25.7 | 893 |
| ▶ 4 AWG (≈ 190/26) ▪ 25.00 mm² | | | | |
| 1270402 | 2 | 0.850 | 21.6 | 518 |
| 1270403 | 3 | 0.906 | 23.0 | 665 |
| 1270404 | 4 | 1.008 | 25.6 | 849 |
| ▶ 2 AWG (≈ 77/26) ▪ 35.00 mm² | | | | |
| 1270202 | 2 | 0.976 | 24.8 | 722 |
| 1270203 | 3 | 1.039 | 26.4 | 935 |
| 1270204 | 4 | 1.142 | 29.0 | 1181 |

Other dimensions and colors are available on request

HD 308 color code: up to 5 conductors

- 2c: blue - brown
- 3c: green/yellow - blue - brown
- 4c: green/yellow - brown - black - gray
- 5c: green/yellow - blue - brown - black - gray



Temperature range
up to +200°C
Style 4511 with nickel
or silver plated
copper strands.

Besilen® - Silicone Cables

SC 600 HDTRS

Besilen® insulated conductors with silicone outer jacket and steel wire armoring for mechanical protection

also possible
with extremely notch
resistant jacket



Marking for SC 600 HDTRS 1281803:

SAB BRÜCKSKES · D-VIERSEN · SC 600 HDTRS AWM Style 4535 150°C 600V CSA AWM I/II A 150°C 600V FT1 FT2

Construction:

| | |
|-------------------------|---|
| Conductor: | tinned copper strands acc. to IEC 60228, VDE 0295, class 5 |
| Insulation: | Besilen® EI2 acc. to EN 50363-1 + VDE 0207-363-1 |
| Color code: | up to 5 conductors- HD 308, see below from 6 conductors- black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334 from 3 conductors- a green/yellow ground |
| Stranding: | in layers |
| Jacket material: | Besilen® better than EM9 acc. to EN 50363-2-1 + VDE 0207-363-2-1 |
| Jacket color: | reddish brown (similar RAL 3016) |
| Armor: | galvanized steel wire braiding |

Technical data:

| | | |
|--|---|-------------------------|
| Nominal voltage: | U ₀ /U 300/500 V | |
| Voltage UL/CSA: | 600 V | |
| Testing voltage: | conductor/conductor: 2000 V | |
| Min. bending radius: | | |
| <i>fixed installation:</i> | 4 x O.D. | |
| <i>free movement:</i> | 6 x O.D. | |
| Radiation resistance: | 2 x 10 ⁷ cJ/kg | |
| Temperature range: | DIN VDE | UL/CSA: |
| <i>static:</i> | -40/+180°C +200°C (2000h) | up to +150°C Style 4535 |
| <i>flexible:</i> | -25/+180°C | |
| <i>short-term use:</i> | +250°C | |
| Halogen-free: | acc. to IEC 60754-1 + VDE 0482-754-1 | |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, CSA FT1, FT2 | |
| Corrosiveness of conflagration gases: | IEC 60754-2 + VDE 0482-754-2 - no development of corrosive conflagration gases | |
| Approvals: | UR AWM, CSA AWM, CE, RoHS | |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 | |

Outstanding features:

- halogen-free
- flexible at low temperatures
- heat resistant
- protection against mechanical damage
- UL recognized and CSA approved

| item no. | no. of conductors incl. ground | outer-ø ±10% inch | outer-ø ±10% mm | cable weight ≈lbs/mft |
|---|--------------------------------------|-------------------------|-----------------------|-----------------------------|
| ▶ 19 AWG (≈ 23/32) ▪ 0.75 mm² | | | | |
| 1281902 | 2 | 0.272 | 6.9 | 44 |
| 1281903 | 3 | 0.283 | 7.2 | 50 |
| 1281904 | 4 | 0.303 | 7.7 | 58 |
| 1281905 | 5 | 0.331 | 8.4 | 70 |
| 1281906 | 6 | 0.354 | 9.0 | 78 |
| 1281907 | 7 | 0.354 | 9.0 | 84 |
| ▶ 18 AWG (≈ 30/32) ▪ 1.00 mm² | | | | |
| 1281802 | 2 | 0.280 | 7.1 | 48 |
| 1281803 | 3 | 0.291 | 7.4 | 56 |
| 1281804 | 4 | 0.315 | 8.0 | 65 |
| 1281805 | 5 | 0.339 | 8.6 | 78 |
| 1281806 | 6 | 0.366 | 9.3 | 88 |
| 1281807 | 7 | 0.366 | 9.3 | 95 |

| item no. | no. of conductors incl. ground | outer-ø ±10% inch | outer-ø ±10% mm | cable weight ≈lbs/mft |
|--|--------------------------------------|-------------------------|-----------------------|-----------------------------|
| ▶ 16 AWG (≈ 27-29/30) ▪ 1.50 mm² | | | | |
| 1281602 | 2 | 0.311 | 7.9 | 60 |
| 1281603 | 3 | 0.327 | 8.3 | 73 |
| 1281604 | 4 | 0.346 | 8.8 | 85 |
| 1281605 | 5 | 0.382 | 9.7 | 99 |
| 1281606 | 6 | 0.413 | 10.5 | 116 |
| 1281607 | 7 | 0.413 | 10.5 | 128 |
| ▶ 14 AWG (≈ 46/30) ▪ 2.50 mm² | | | | |
| 1281402 | 2 | 0.366 | 9.3 | 86 |
| 1281403 | 3 | 0.386 | 9.8 | 103 |
| 1281404 | 4 | 0.417 | 10.6 | 126 |
| 1281405 | 5 | 0.469 | 11.9 | 152 |
| 1281406 | 6 | 0.508 | 12.9 | 174 |
| 1281407 | 7 | 0.508 | 12.9 | 192 |

| item no. | no. of conductors incl. ground | outer-ø ±10% inch | outer-ø ±10% mm | cable weight ≈lbs/mft |
|---|--------------------------------------|-------------------------|-----------------------|-----------------------------|
| ▶ 12 AWG (≈ 52/28) ▪ 4.00 mm² | | | | |
| 1281202 | 2 | 0.413 | 10.5 | 114 |
| 1281203 | 3 | 0.449 | 11.4 | 147 |
| 1281204 | 4 | 0.488 | 12.4 | 177 |
| 1281205 | 5 | 0.539 | 13.7 | 220 |
| 1281206 | 6 | 0.587 | 14.9 | 253 |
| 1281207 | 7 | 0.587 | 14.9 | 280 |
| ▶ 10 AWG (≈ 78/28) ▪ 6.00 mm² | | | | |
| 1281002 | 2 | 0.472 | 12.0 | 157 |
| 1281003 | 3 | 0.500 | 12.7 | 194 |
| 1281004 | 4 | 0.543 | 13.8 | 244 |
| 1281005 | 5 | 0.594 | 15.1 | 288 |

Other dimensions and colors are available on request

HD 308 color code: up to 5 conductors

2c: blue, brown

3c: green/yellow, blue, brown

4c: green/yellow, brown, black, gray

5c: green/yellow, blue, brown, black, gray



Temperature range up to +200°C
Style 4511 with nickel
or silver plated copper strands.

Besilen® - Silicone Cables

BiHF/Cu/Bi-J

Shielded Besilen® (silicone) insulated conductors with silicone outer jacket

also possible
with extremely notch
resistant jacket

+180°C



Construction:

| | |
|-------------------------|---|
| Conductor: | tinned copper strands acc. to IEC 60228, VDE 0295, class 5 |
| Insulation: | Besilen® EI2 acc. to EN 50363-1 + VDE 0207-363-1 |
| Color code: | up to 5 conductors- HD 308, see below from 6 conductors- black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334 from 3 conductors- a green/yellow ground |
| Stranding: | in layers |
| Inner jacket: | Besilen® EM9 acc. to EN 50363-2-1 + VDE 0207-363-2-1 |
| Shielding : | tinned copper braiding |
| Jacket material: | Besilen® EM9 acc. to EN 50363-2-1 + VDE 0207-363-2-1 |
| Jacket color: | reddish brown (similar RAL 3016) |

Outstanding features:

- good EMC characteristics
- halogen-free
- flexible at low temperatures
- heat resistant
- increased mechanical protection

Technical data:

| | |
|--|--|
| Nominal voltage: | U _o /U 300/500 V |
| Testing voltage: | conductor/conductor: 2000 V conductor/shield: 2000 V |
| Min. bending radius: | fixed installation: 5 x O.D. free movement: 10 x O.D. |
| Radiation resistance: | 2 x 10 ⁷ cJ/kg |
| Temperature range: | static: -40/+180°C flexible: -25/+180°C short-term use: +250°C |
| Halogen-free | acc. to IEC 60754-1 + VDE 0482-754-1 |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2 |
| Corrosiveness of conflagration gases: | IEC 60754-2 + VDE 0482-754-2 - no development of corrosive conflagration gases |
| Chemical resistance: | see page O/11 |
| Weather resistance: | very good |
| Approvals: | CE, RoHS |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 |

| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|---|--------------------------------------|--------------|------------|-----------------------------|
| | | ±10% inch | ±10% mm | |
| ▶ 20 AWG (≈ 16/32) • 0.50 mm² | | | | |
| 1900205 | 2 | 0.299 | 7.6 | 56 |
| 1900305 | 3 | 0.311 | 7.9 | 60 |
| 1900405 | 4 | 0.327 | 8.3 | 67 |
| 1900505 | 5 | 0.350 | 8.9 | 77 |
| 1900705 | 7 | 0.370 | 9.4 | 89 |
| 1901005 | 10 | 0.457 | 11.6 | 128 |
| 1901205 | 12 | 0.469 | 11.9 | 142 |
| 1901605 | 16 | 0.531 | 13.5 | 179 |
| 1901805 | 18 | 0.551 | 14.0 | 196 |
| ▶ 19 AWG (≈ 23/32) • 0.75 mm² | | | | |
| 1900207 | 2 | 0.323 | 8.2 | 67 |
| 1900307 | 3 | 0.335 | 8.5 | 73 |
| 1900407 | 4 | 0.354 | 9.0 | 83 |
| 1900507 | 5 | 0.382 | 9.7 | 93 |
| 1900707 | 7 | 0.421 | 10.7 | 122 |
| 1901007 | 10 | 0.528 | 13.4 | 171 |
| 1901207 | 12 | 0.539 | 13.7 | 189 |
| 1901607 | 16 | 0.587 | 14.9 | 224 |
| 1901807 | 18 | 0.642 | 16.3 | 269 |

| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|--|--------------------------------------|--------------|------------|-----------------------------|
| | | ±10% inch | ±10% mm | |
| ▶ 18 AWG (≈ 30/32) • 1.00 mm² | | | | |
| 1900210 | 2 | 0.331 | 8.4 | 72 |
| 1900310 | 3 | 0.343 | 8.7 | 80 |
| 1900410 | 4 | 0.366 | 9.3 | 91 |
| 1900510 | 5 | 0.398 | 10.1 | 106 |
| 1900710 | 7 | 0.433 | 11.0 | 135 |
| 1901010 | 10 | 0.551 | 14.0 | 190 |
| 1901210 | 12 | 0.555 | 14.1 | 208 |
| 1901610 | 16 | 0.634 | 16.1 | 271 |
| 1901810 | 18 | 0.661 | 16.8 | 301 |
| ▶ 16 AWG (≈ 27-29/30) • 1.50 mm² | | | | |
| 1900215 | 2 | 0.370 | 9.4 | 92 |
| 1900315 | 3 | 0.398 | 10.1 | 111 |
| 1900415 | 4 | 0.425 | 10.8 | 128 |
| 1900515 | 5 | 0.457 | 11.6 | 147 |
| 1900715 | 7 | 0.504 | 12.8 | 182 |
| 1901015 | 10 | 0.646 | 16.4 | 273 |
| 1901215 | 12 | 0.661 | 16.8 | 300 |
| 1901615 | 16 | 0.732 | 18.6 | 362 |
| 1901815 | 18 | 0.764 | 19.4 | 404 |

| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|---|--------------------------------------|--------------|------------|-----------------------------|
| | | ±10% inch | ±10% mm | |
| ▶ 14 AWG (≈ 46/30) • 2.50 mm² | | | | |
| 1900225 | 2 | 0.433 | 11.0 | 134 |
| 1900325 | 3 | 0.453 | 11.5 | 152 |
| 1900425 | 4 | 0.500 | 12.7 | 184 |
| 1900525 | 5 | 0.551 | 14.0 | 220 |
| 1900725 | 7 | 0.591 | 15.0 | 263 |

Other dimensions and colors are available on request

HD 308 color code: up to 5 conductors

2c: blue, brown

3c: green/yellow, blue, brown


4c: green/yellow, brown, black, gray

5c: green/yellow, blue, brown, black, gray

Cable Track Cables

S 200

Continuous flex halogen-free polyurethane control cable with extreme temperature range



Marking for S 200 7741215:

SAB BRÖCKSKES · D-VIERSEN · S 200 12 x 1.5 mm² CE

Construction:

| | |
|-------------------------|--|
| Conductor: | bare copper strands acc. to IEC 60228, VDE 0295, class 6 |
| Insulation: | TPE |
| Color code: | black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334, green/yellow ground from 3 conductors |
| Stranding: | specially adjusted layering with non-woven tape over each layer |
| Wrapping: | non-woven tape |
| Jacket material: | PUR, TMPU acc. to EN 50363-3 + VDE 0207-363-3-10-2 with matte surface |
| Jacket color: | gray (RAL 7000) |

Technical data:

| | |
|---|--|
| Nominal voltage: | U _o /U 300/500 V |
| Testing voltage: | conductor/conductor: 2000 V |
| Min. bending radius: <i>continuously flexible:</i> | 7.5 x O.D. |
| Radiation resistance: | 1 x 10 ⁷ cJ/kg |
| Temperature range: <i>static:</i> <i>flexible:</i> | -50/+90°C -40/+90°C |
| Halogen-free: | acc. to IEC 60754-1 + VDE 0482-754-1 |
| Oil resistance: | very good - TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2 |
| Chemical resistance: | good against acids, alkalines, solvents, hydraulic liquids etc. |
| Continuous flexibility: | very good |
| Weather resistance: | very good |
| Approvals: | CE, RoHS |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 |

Outstanding features:



- free from paint wetting impairment substances (PWIS-free)
- flexible at low temperatures
- halogen-free
- travel > 10 m is possible
- high abrasion resistance
- minimal bending radius
- small outer diameter

| item no. | no. of conductors incl. ground | outer-ø ±10% inch | outer-ø ±10% mm | cable weight ≈lbs/mft |
|---|--------------------------------|-------------------|-----------------|-----------------------|
| ▶ 20 AWG (≈ 28/34) ▪ 0.50 mm² | | | | |
| 7740205 | 2 | 0.193 | 4.9 | 19 |
| 7740305 | 3 | 0.201 | 5.1 | 23 |
| 7740405 | 4 | 0.217 | 5.5 | 28 |
| 7740505 | 5 | 0.236 | 6.0 | 34 |
| 7740705 | 7 | 0.272 | 6.9 | 46 |
| 7741205 | 12 | 0.327 | 8.3 | 67 |
| 7741805 | 18 | 0.390 | 9.9 | 96 |
| 7742505 | 25 | 0.469 | 11.9 | 132 |
| 7743605 | 36 | 0.539 | 13.7 | 189 |
| 7745005 | 50 | 0.634 | 16.1 | 256 |
| 7746505 | 65 | 0.717 | 18.2 | 321 |
| ▶ 19 AWG (≈ 42/34) ▪ 0.75 mm² | | | | |
| 7740207 | 2 | 0.213 | 5.4 | 24 |
| 7740307 | 3 | 0.224 | 5.7 | 30 |
| 7740407 | 4 | 0.240 | 6.1 | 36 |
| 7740507 | 5 | 0.264 | 6.7 | 45 |
| 7740707 | 7 | 0.311 | 7.9 | 62 |
| 7741207 | 12 | 0.378 | 9.6 | 92 |
| 7741807 | 18 | 0.445 | 11.3 | 136 |
| 7742507 | 25 | 0.547 | 13.9 | 187 |
| 7743607 | 36 | 0.606 | 15.4 | 258 |
| 7745007 | 50 | 0.724 | 18.4 | 355 |
| 7746507 | 65 | 0.819 | 20.8 | 462 |

| item no. | no. of conductors incl. ground | outer-ø ±10% inch | outer-ø ±10% mm | cable weight ≈lbs/mft |
|---|--------------------------------|-------------------|-----------------|-----------------------|
| ▶ 18 AWG (≈ 56/34) ▪ 1.00 mm² | | | | |
| 7740210 | 2 | 0.228 | 5.8 | 30 |
| 7740310 | 3 | 0.240 | 6.1 | 36 |
| 7740410 | 4 | 0.260 | 6.6 | 45 |
| 7740510 | 5 | 0.283 | 7.2 | 55 |
| 7740710 | 7 | 0.339 | 8.6 | 78 |
| 7741210 | 12 | 0.409 | 10.4 | 116 |
| 7741810 | 18 | 0.484 | 12.3 | 172 |
| 7742510 | 25 | 0.594 | 15.1 | 237 |
| 7743610 | 36 | 0.669 | 17.0 | 333 |
| 7745010 | 50 | 0.799 | 20.3 | 458 |
| 7746510 | 65 | 0.902 | 22.9 | 595 |
| ▶ 16 AWG (≈ 84/34) ▪ 1.50 mm² | | | | |
| 7740115 | 1 | 0.157 | 4.0 | 17 |
| 7740215 | 2 | 0.252 | 6.4 | 38 |
| 7740315 | 3 | 0.264 | 6.7 | 47 |
| 7740415 | 4 | 0.287 | 7.3 | 60 |
| 7740515 | 5 | 0.315 | 8.0 | 74 |
| 7740715 | 7 | 0.378 | 9.6 | 107 |
| 7741215 | 12 | 0.465 | 11.8 | 163 |
| 7741815 | 18 | 0.559 | 14.2 | 243 |
| 7742515 | 25 | 0.673 | 17.1 | 329 |
| 7743615 | 36 | 0.760 | 19.3 | 464 |
| 7745015 | 50 | 0.906 | 23.0 | 638 |
| 7746515 | 65 | 1.024 | 26.0 | 833 |

| item no. | no. of conductors incl. ground | outer-ø ±10% inch | outer-ø ±10% mm | cable weight ≈lbs/mft |
|--|--------------------------------|-------------------|-----------------|-----------------------|
| ▶ 14 AWG (≈ 140/34) ▪ 2.50 mm² | | | | |
| 7740125 | 1 | 0.185 | 4.7 | 26 |
| 7740225 | 2 | 0.307 | 7.8 | 57 |
| 7740325 | 3 | 0.327 | 8.3 | 74 |
| 7740425 | 4 | 0.362 | 9.2 | 95 |
| 7740525 | 5 | 0.402 | 10.2 | 118 |
| 7740725 | 7 | 0.480 | 12.2 | 172 |
| 7741225 | 12 | 0.606 | 15.4 | 268 |
| 7741825 | 18 | 0.713 | 18.1 | 395 |
| 7742525 | 25 | 0.870 | 22.1 | 539 |
| 7743625 | 36 | 0.976 | 24.8 | 758 |
| ▶ 12 AWG (≈ 224/34) ▪ 4.00 mm² | | | | |
| 7740140 | 1 | 0.213 | 5.4 | 38 |
| 7740240 | 2 | 0.366 | 9.3 | 87 |
| 7740340 | 3 | 0.386 | 9.8 | 116 |
| 7740440 | 4 | 0.425 | 10.8 | 146 |
| 7740540 | 5 | 0.476 | 12.1 | 180 |
| 7740740 | 7 | 0.575 | 14.6 | 265 |

continued on next page

Cable Track Cables

S 200

Continuous flex halogen-free polyurethane control cable with extreme temperature range



Marking for S 200 7740161:

SAB BRÖCKSKES · D-VIERSEN · S 200 1 x 10.0 mm² CE



Marking for S 200 7741215:

SAB BRÖCKSKES · D-VIERSEN · S 200 12 x 1.5 mm² CE

| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|--|--------------------------------|-----------|---------|-----------------------|
| | | ±10% inch | ±10% mm | |
| ▶ 10 AWG (≈ 186/32) ▪ 6.00 mm² | | | | |
| 7740160 | 1 | 0.240 | 6.1 | 51 |
| 7740260 | 2 | 0.425 | 10.8 | 118 |
| 7740360 | 3 | 0.461 | 11.7 | 165 |
| 7740460 | 4 | 0.504 | 12.8 | 212 |
| 7740560 | 5 | 0.571 | 14.5 | 261 |
| 7740760 | 7 | 0.681 | 17.3 | 339 |
| ▶ 8 AWG (≈ 320/32) ▪ 10.00 mm² | | | | |
| 7740161 | 1 | 0.280 | 7.1 | 81 |
| 7740361 | 3 | 0.555 | 14.1 | 265 |
| 7740461 | 4 | 0.622 | 15.8 | 341 |
| 7740561 | 5 | 0.677 | 17.2 | 410 |
| ▶ 6 AWG (≈ 504/32) ▪ 16.00 mm² | | | | |
| 7740162 | 1 | 0.327 | 8.3 | 119 |
| 7740362 | 3 | 0.669 | 17.0 | 401 |
| 7740462 | 4 | 0.748 | 19.0 | 525 |
| 7740562 | 5 | 0.835 | 21.2 | 659 |

| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|---|--------------------------------|-----------|---------|-----------------------|
| | | ±10% inch | ±10% mm | |
| ▶ 4 AWG (≈ 760/32) ▪ 25.00 mm² | | | | |
| 7740163 | 1 | 0.390 | 9.9 | 177 |
| 7740363 | 3 | 0.811 | 20.6 | 570 |
| 7740463 | 4 | 0.898 | 22.8 | 776 |
| 7740563 | 5 | 1.000 | 25.4 | 913 |
| ▶ 2 AWG (≈ 1083/32) ▪ 35.00 mm² | | | | |
| 7740164 | 1 | 0.453 | 11.5 | 247 |
| 7740464 | 4 | 1.039 | 26.4 | 1030 |
| 7740564 | 5 | 1.173 | 29.8 | 1273 |
| ▶ 1 AWG (≈ 703/28) ▪ 50.00 mm² | | | | |
| 7740165 | 1 | 0.551 | 14.0 | 361 |
| 7740465 | 4 | 1.252 | 31.8 | 1523 |
| ▶ 2/0 AWG (≈ 988/28) ▪ 70.00 mm² | | | | |
| 7740166 | 1 | 0.657 | 16.7 | 507 |
| ▶ 3/0 AWG (≈ 1340/28) ▪ 95.00 mm² | | | | |
| 7740167 | 1 | 0.807 | 20.5 | 691 |

| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|--|--------------------------------|-----------|---------|-----------------------|
| | | ±10% inch | ±10% mm | |
| ▶ 4/0 AWG (≈ 1680/28) ▪ 120.00 mm² | | | | |
| 7740168 | 1 | 0.846 | 21.5 | 847 |
| ▶ 250 MCM (≈ 2122/28) ▪ 150.00 mm² | | | | |
| 7740169 | 1 | 0.969 | 24.6 | 1087 |
| ▶ 350 MCM (≈ 1472/28) ▪ 185.00 mm² | | | | |
| 7740170 | 1 | 1.051 | 26.7 | 1305 |
| ▶ 450 MCM (≈ 1910/28) ▪ 240.00 mm² | | | | |
| 7740171 | 1 | 1.185 | 30.1 | 1668 |

Other dimensions and colors are available on request



Possible on request:

- single conductor with green/yellow insulation and black outer jacket or 0.6/1 kV

Cable Track Cables

S 200 C

Continuous flex halogen-free polyurethane shielded control cable with extreme temperature range



Marking for S 200 C 7841215:

SAB BRÖCKSKES · D-VIERSEN · S 200 C 12 x 1.5 mm² CE

Construction:

| | |
|--|--|
| Conductor: | bare copper strands acc. to IEC 60228, VDE 0295, class 6 |
| Insulation: | TPE |
| Color code: from 2 conductors | black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334, green/yellow ground from 3 conductors |
| Stranding: | specially adjusted layering with non-woven tape over each layer |
| Inner jacket: | SABIX® |
| Wrapping: | non-woven tape |
| Shielding: | tinned copper braiding |
| Wrapping: | non-woven tape |
| Jacket material: | PUR, TPU acc. to EN 50363-3 + VDE 0207-363-3-10-2 with matte surface |
| Jacket color: | gray (RAL 7000) |

Technical data:

| | |
|--|--|
| Nominal voltage: | Uo/U 300/500 V |
| Testing voltage: | conductor/conductor: 2000 V conductor/shielding: 2000 V |
| Min. bending radius: continuously flexible: | 7.5 x O.D. |
| Radiation resistance: | 1 x 10 ⁷ cJ/kg |
| Temperature range: static: flexible: | -50/+90°C -40/+90°C |
| Halogen-free: | acc. to IEC 60754-1 + VDE 0482-754-1 |
| Oil resistance: | very good - TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2 |
| Chemical resistance: | good against acids, alkalines, solvents, hydraulic liquids etc. |
| Continuous flexibility: | very good |
| Weather resistance: | very good |
| Approvals: | CE, RoHS |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 |

Outstanding features:



- free from paint wetting impairment substances (PWIS-free)
- flexible at low temperatures
- halogen-free
- travel > 10 m is possible
- good EMC characteristics
- high abrasion resistance
- minimal bending radius
- small outer diameter

| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|---|--------------------------------------|--------------|------------|-----------------------------|
| | | ±10% inch | ±10% mm | |
| ▶ 20 AWG (≈ 28/34) ▪ 0.50 mm² | | | | |
| 7840205 | 2 | 0.268 | 6.8 | 37 |
| 7840305 | 3 | 0.276 | 7.0 | 42 |
| 7840405 | 4 | 0.291 | 7.4 | 48 |
| 7840505 | 5 | 0.311 | 7.9 | 56 |
| 7840705 | 7 | 0.354 | 9.0 | 73 |
| 7841205 | 12 | 0.417 | 10.6 | 102 |
| 7841805 | 18 | 0.480 | 12.2 | 144 |
| 7842505 | 25 | 0.583 | 14.8 | 206 |
| 7843605 | 36 | 0.646 | 16.4 | 255 |
| 7845205 | 52 | 0.756 | 19.2 | 352 |
| 7846505 | 65 | 0.854 | 21.7 | 435 |
| ▶ 19 AWG (≈ 42/34) ▪ 0.75 mm² | | | | |
| 7840207 | 2 | 0.287 | 7.3 | 43 |
| 7840307 | 3 | 0.299 | 7.6 | 50 |
| 7840407 | 4 | 0.315 | 8.0 | 58 |
| 7840507 | 5 | 0.346 | 8.8 | 71 |
| 7840707 | 7 | 0.386 | 9.8 | 87 |
| 7841207 | 12 | 0.469 | 11.9 | 137 |
| 7841807 | 18 | 0.559 | 14.2 | 198 |
| 7842507 | 25 | 0.654 | 16.6 | 259 |
| 7843607 | 36 | 0.736 | 18.7 | 349 |
| 7845207 | 52 | 0.862 | 21.9 | 488 |
| 7846507 | 65 | 0.965 | 24.5 | 583 |

| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|---|--------------------------------------|--------------|------------|-----------------------------|
| | | ±10% inch | ±10% mm | |
| ▶ 18 AWG (≈ 56/34) ▪ 1.00 mm² | | | | |
| 7840210 | 2 | 0.303 | 7.7 | 48 |
| 7840310 | 3 | 0.315 | 8.0 | 58 |
| 7840410 | 4 | 0.335 | 8.5 | 66 |
| 7840510 | 5 | 0.366 | 9.3 | 81 |
| 7840710 | 7 | 0.421 | 10.7 | 117 |
| 7841210 | 12 | 0.504 | 12.8 | 167 |
| 7841810 | 18 | 0.598 | 15.2 | 248 |
| 7842510 | 25 | 0.724 | 18.4 | 334 |
| 7843610 | 36 | 0.799 | 20.3 | 441 |
| 7845210 | 52 | 0.937 | 23.8 | 612 |
| 7846510 | 65 | 1.055 | 26.8 | 759 |
| ▶ 16 AWG (≈ 84/34) ▪ 1.50 mm² | | | | |
| 7840115 | 1 | 0.181 | 4.6 | 24 |
| 7840215 | 2 | 0.327 | 8.3 | 58 |
| 7840315 | 3 | 0.339 | 8.6 | 71 |
| 7840415 | 4 | 0.370 | 9.4 | 88 |
| 7840515 | 5 | 0.398 | 10.1 | 100 |
| 7840715 | 7 | 0.469 | 11.9 | 141 |
| 7841215 | 12 | 0.579 | 14.7 | 236 |
| 7841815 | 18 | 0.665 | 16.9 | 325 |
| 7842515 | 25 | 0.803 | 20.4 | 439 |
| 7843615 | 36 | 0.906 | 23.0 | 597 |
| 7845215 | 52 | 1.059 | 26.9 | 799 |
| 7846515 | 65 | 1.177 | 29.9 | 1017 |

| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|--|--------------------------------------|--------------|------------|-----------------------------|
| | | ±10% inch | ±10% mm | |
| ▶ 14 AWG (≈ 140/34) ▪ 2.50 mm² | | | | |
| 7840125 | 1 | 0.209 | 5.3 | 33 |
| 7840225 | 2 | 0.390 | 9.9 | 82 |
| 7840325 | 3 | 0.417 | 10.6 | 111 |
| 7840425 | 4 | 0.453 | 11.5 | 137 |
| 7840525 | 5 | 0.496 | 12.6 | 167 |
| 7840725 | 7 | 0.591 | 15.0 | 245 |
| 7841225 | 12 | 0.728 | 18.5 | 364 |
| 7841825 | 18 | 0.850 | 21.6 | 515 |
| 7842525 | 25 | 1.024 | 26.0 | 696 |
| 7843625 | 36 | 1.130 | 28.7 | 934 |
| 7845225 | 52 | 1.299 | 33.0 | 1250 |
| ▶ 12 AWG (≈ 224/34) ▪ 4.00 mm² | | | | |
| 7840140 | 1 | 0.232 | 5.9 | 45 |
| 7840240 | 2 | 0.457 | 11.6 | 122 |
| 7840340 | 3 | 0.476 | 12.1 | 151 |
| 7840440 | 4 | 0.539 | 13.7 | 201 |
| 7840540 | 5 | 0.591 | 15.0 | 240 |
| 7840740 | 7 | 0.709 | 18.0 | 357 |

continued on next page

Cable Track Cables

S 200 C

Continuous flex halogen-free polyurethane shielded control cable with extreme temperature range



Marking for S 200 C 7840161:

SAB BRÖCKSKES · D-VIERSEN · S 200 C 1 x 10.0 mm² CE



Marking for S 200 C 7841215:

SAB BRÖCKSKES · D-VIERSEN · S 200 C 12 x 1.5 mm² CE

| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|---------------------------------------|--------------------------------|-----------|---------|-----------------------|
| | | ±10% inch | ±10% mm | |
| ▶ 10 AWG (≈ 186/32) ▪ 6.00 mm² | | | | |
| 7840160 | 1 | 0.260 | 6.6 | 61 |
| 7840260 | 2 | 0.539 | 13.7 | 169 |
| 7840360 | 3 | 0.575 | 14.6 | 228 |
| 7840460 | 4 | 0.626 | 15.9 | 282 |
| 7840560 | 5 | 0.709 | 18.0 | 351 |
| 7840760 | 7 | 0.811 | 20.6 | 478 |
| ▶ 8 AWG (≈ 320/32) ▪ 10.00 mm² | | | | |
| 7840161 | 1 | 0.303 | 7.7 | 91 |
| 7840361 | 3 | 0.685 | 17.4 | 347 |
| 7840461 | 4 | 0.744 | 18.9 | 434 |
| 7840561 | 5 | 0.807 | 20.5 | 491 |
| ▶ 6 AWG (≈ 504/32) ▪ 16.00 mm² | | | | |
| 7840162 | 1 | 0.358 | 9.1 | 140 |
| 7840362 | 3 | 0.815 | 20.7 | 486 |
| 7840462 | 4 | 0.886 | 22.5 | 615 |
| 7840562 | 5 | 0.972 | 24.7 | 740 |

| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|--|--------------------------------|-----------|---------|-----------------------|
| | | ±10% inch | ±10% mm | |
| ▶ 4 AWG (≈ 760/32) ▪ 25.00 mm² | | | | |
| 7840163 | 1 | 0.421 | 10.7 | 202 |
| 7840363 | 3 | 0.941 | 23.9 | 698 |
| 7840463 | 4 | 1.016 | 25.8 | 871 |
| 7840563 | 5 | 1.146 | 29.1 | 1082 |
| ▶ 2 AWG (≈ 1083/32) ▪ 35.00 mm² | | | | |
| 7840164 | 1 | 0.492 | 12.5 | 278 |
| 7840464 | 4 | 1.185 | 30.1 | 1196 |
| 7840564 | 5 | 1.303 | 33.1 | 1424 |
| ▶ 1 AWG (≈ 703/28) ▪ 50.00 mm² | | | | |
| 7840165 | 1 | 0.591 | 15.0 | 405 |
| 7840465 | 4 | 1.398 | 35.5 | 1756 |
| ▶ 2/0 AWG (≈ 988/28) ▪ 70.00 mm² | | | | |
| 7840166 | 1 | 0.693 | 17.6 | 560 |
| ▶ 3/0 AWG (≈ 1340/28) ▪ 95.00 mm² | | | | |
| 7840167 | 1 | 0.846 | 21.5 | 765 |


| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|---|--------------------------------|-----------|---------|-----------------------|
| | | ±10% inch | ±10% mm | |
| ▶ 4/0 AWG (≈ 1680/28) ▪ 120.00 mm² | | | | |
| 7840168 | 1 | 0.894 | 22.7 | 923 |
| ▶ 250 MCM (≈ 2122/28) ▪ 150.00 mm² | | | | |
| 7840169 | 1 | 1.031 | 26.2 | 1164 |
| ▶ 350 MCM (≈ 1472/26) ▪ 185.00 mm² | | | | |
| 7840170 | 1 | 1.008 | 25.6 | 1402 |
| ▶ 450 MCM (≈ 1910/26) ▪ 240.00 mm² | | | | |
| 7840171 | 1 | 1.232 | 31.3 | 1777 |

Other dimensions and colors are available on request

Cable Track Cables

S 180 HT

Continuous flex control cable with Besilen® (silicone) outer jacket for cable tracks

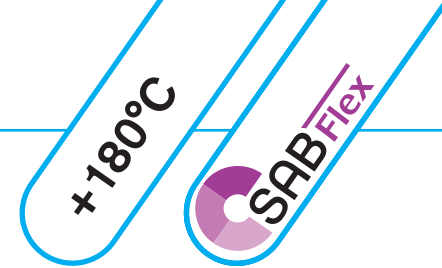

Construction:

| | |
|-------------------------|--|
| Conductor: | tinned copper strands acc. to IEC 60228, VDE 0295, class 6 |
| Insulation: | FEP |
| Color code: | black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334 from 3 conductors- a green/yellow ground |
| Stranding: | specially adjusted layering with non-woven tape over each layer |
| Wrapping: | tape |
| Jacket material: | special Besilen® |
| Jacket color: | gray (similar RAL 7000) |

Technical data:

| | |
|---|--|
| Nominal voltage: | U _o /U 0.6/1 kV |
| Testing voltage: | conductor/conductor: 4000 V |
| Min. bending radius: <i>continuously flexible:</i> | 10 x O.D. |
| Temperature range: <i>static:</i> <i>flexible:</i> <i>short-term use:</i> | -25/+180°C -25/+180°C +200°C |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2 |
| Flexibility: | very good |
| Approvals: | CE, RoHS |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 |

Outstanding features:



- extreme temperature resistance
- high notch resistance
- very good flexibility

| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|--|--------------------------------|-----------|---------|-----------------------|
| | | ±10% inch | ±10% mm | |
| ▶ 16 AWG (≈ 84/34) ▪ 1.50 mm² | | | | |
| 31800315 | 3 | 0.303 | 7.7 | 63 |
| 31800415 | 4 | 0.327 | 8.3 | 78 |
| 31800515 | 5 | 0.362 | 9.2 | 99 |
| 31800715 | 7 | 0.417 | 10.6 | 134 |
| ▶ 14 AWG (≈ 140/34) ▪ 2.50 mm² | | | | |
| 31800325 | 3 | 0.370 | 9.4 | 97 |
| 31800425 | 4 | 0.398 | 10.1 | 119 |
| 31800525 | 5 | 0.453 | 11.5 | 153 |
| 31800625 | 6 | 0.504 | 12.8 | 180 |
| 31800725 | 7 | 0.531 | 13.5 | 215 |
| 31801225 | 12 | 0.650 | 16.5 | 316 |
| 31802025 | 20 | 0.795 | 20.2 | 512 |

| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|--|--------------------------------|-----------|---------|-----------------------|
| | | ±10% inch | ±10% mm | |
| ▶ 12 AWG (≈ 224/34) ▪ 4.00 mm² | | | | |
| 31800440 | 4 | 0.480 | 12.2 | 177 |
| 31800540 | 5 | 0.528 | 13.4 | 224 |
| 31800740 | 7 | 0.626 | 15.9 | 315 |
| 31801240 | 12 | 0.772 | 19.6 | 475 |
| ▶ 10 AWG (≈ 186/32) ▪ 6.00 mm² | | | | |
| 31800360 | 3 | 0.528 | 13.4 | 203 |
| 31800460 | 4 | 0.575 | 14.6 | 274 |
| 31800560 | 5 | 0.646 | 16.4 | 333 |
| 31800760 | 7 | 0.764 | 19.4 | 468 |
| ▶ 8 AWG (≈ 320/32) ▪ 10.00 mm² | | | | |
| 31800361 | 3 | 0.602 | 15.3 | 307 |
| 31800461 | 4 | 0.669 | 17.0 | 409 |
| 31800561 | 5 | 0.744 | 18.9 | 501 |

| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|---|--------------------------------|-----------|---------|-----------------------|
| | | ±10% inch | ±10% mm | |
| ▶ 6 AWG (≈ 504/32) ▪ 16.00 mm² | | | | |
| 31800462 | 4 | 0.815 | 20.7 | 613 |
| 31800562 | 5 | 0.913 | 23.2 | 770 |
| ▶ 4 AWG (≈ 760/32) ▪ 25.00 mm² | | | | |
| 31800363 | 3 | 0.846 | 21.5 | 671 |
| 31800463 | 4 | 0.945 | 24.0 | 882 |
| ▶ 2 AWG (≈ 1083/32) ▪ 35.00 mm² | | | | |
| 31800164 | 1 | 0.508 | 12.9 | 288 |
| 31800464 | 4 | 1.110 | 28.2 | 1209 |
| ▶ 3/0 AWG (≈ 1340/28) ▪ 95 mm² | | | | |
| 31800167 | 1 | 0.831 | 21.1 | 750 |
| ▶ 250 MCM (≈ 2122/28) ▪ 150 mm² | | | | |
| 31800169 | 1 | 1.004 | 25.5 | 1172 |

Other dimensions and colors are available on request




Application:
for use in cable tracks with
extremely high ambient
temperatures
for example: steel industry

Cable Track Cables

S 180 C HT

Continuous flex shielding control cable with Besilen® (silicone) outer jacket for cable tracks

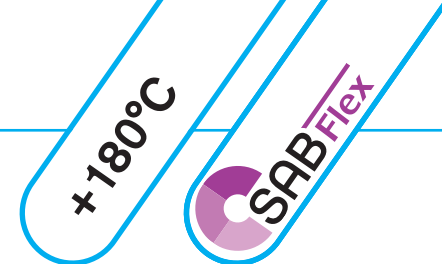

Construction:

| | |
|-------------------------|--|
| Conductor: | tinned copper strands acc. to IEC 60228, VDE 0295, class 6 |
| Insulation: | FEP |
| Color code: | black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334 from 3 conductors- a green/yellow ground |
| Stranding: | specially adjusted layering with non-woven tape over each layer |
| Wrapping: | tape |
| Shield: | tinned copper braiding |
| Jacket material: | special Besilen® |
| Jacket color: | gray (similar RAL 7000) |

Technical data:

| | |
|---|--|
| Nominal voltage: | U ₀ /U 0.6/1 kV |
| Testing voltage: | conductor/conductor: 4000 V conductor/shield: 4000 V |
| Min. bending radius: <i>continuously flexible:</i> | 15 x O.D. |
| Temperature range: <i>static:</i> <i>flexible:</i> <i>short-term use:</i> | -25/+180°C -25/+180°C +200°C |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2 |
| Flexibility: | very good |
| Approvals: | CE, RoHS |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 |

Outstanding features:



- very good EMC characteristics
- extreme temperature resistance
- high notch resistance
- very good flexibility

| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|--|--------------------------------|-----------|---------|-----------------------|
| | | ±10% inch | ±10% mm | |
| ▶ 16 AWG (≈ 89/34) ▪ 1.50 mm² | | | | |
| 31850315 | 3 | 0.319 | 8.1 | 74 |
| 31850415 | 4 | 0.350 | 8.9 | 92 |
| 31850515 | 5 | 0.378 | 9.6 | 112 |
| 31850715 | 7 | 0.449 | 11.4 | 161 |
| ▶ 14 AWG (≈ 140/34) ▪ 2.50 mm² | | | | |
| 31850325 | 3 | 0.386 | 9.8 | 110 |
| 31850425 | 4 | 0.437 | 11.1 | 148 |
| 31850525 | 5 | 0.476 | 12.1 | 180 |
| 31850725 | 7 | 0.551 | 14.0 | 245 |
| 31852025 | 20 | 0.827 | 21.0 | 575 |

| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|--|--------------------------------|-----------|---------|-----------------------|
| | | ±10% inch | ±10% mm | |
| ▶ 12 AWG (≈ 224/34) ▪ 4.00 mm² | | | | |
| 31850440 | 4 | 0.500 | 12.7 | 204 |
| 31850540 | 5 | 0.551 | 14.0 | 254 |
| 31850740 | 7 | 0.657 | 16.7 | 363 |
| 31851240 | 12 | 0.799 | 20.3 | 531 |
| ▶ 10 AWG (≈ 186/32) ▪ 6.00 mm² | | | | |
| 31850360 | 3 | 0.551 | 14.0 | 229 |
| 31850460 | 4 | 0.598 | 15.2 | 307 |
| 31850560 | 5 | 0.677 | 17.2 | 382 |
| 31850760 | 7 | 0.795 | 20.2 | 524 |
| ▶ 8 AWG (≈ 320/32) ▪ 10.00 mm² | | | | |
| 31850461 | 4 | 0.701 | 17.8 | 459 |
| 31850561 | 5 | 0.776 | 19.7 | 556 |

| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|---|--------------------------------|-----------|---------|-----------------------|
| | | ±10% inch | ±10% mm | |
| ▶ 6 AWG (≈ 504/32) ▪ 16.00 mm² | | | | |
| 31850462 | 4 | 0.846 | 21.5 | 677 |
| 31850562 | 5 | 0.945 | 24.0 | 844 |
| ▶ 4 AWG (≈ 760/32) ▪ 25.00 mm² | | | | |
| 31850463 | 4 | 0.992 | 25.2 | 970 |
| ▶ 2 AWG (≈ 1083/32) ▪ 35.00 mm² | | | | |
| 31850464 | 4 | 1.142 | 29.0 | 1299 |
| ▶ 3/0 AWG (≈ 1340/28) ▪ 95 mm² | | | | |
| 31850167 | 1 | 0.878 | 22.3 | 825 |
| ▶ 350 MCM (≈ 1472/26) ▪ 150 mm² | | | | |
| 31850170 | 1 | 1.126 | 28.6 | 1512 |

Other dimensions and colors are available on request



Application:
for use in cable tracks with
extremely high ambient
temperatures
for example: steel industry

Reeling Cables

DR 721 P

Reeling cable for higher mechanical stress, 0.6/1 kV



Marking for DR 721 P 7210425:

SAB BRÖCKSKES · D-VIERSEN · DR 721 P 4 G 2.5 mm² CE

Application: The DR 721 P is used for spring cable and motor cable reels, hoists, transport systems and farm vehicles with medium mechanical stress.

Construction:

| | |
|---------------------------|--|
| Conductor: | bare copper strands acc. to IEC 60228, VDE 0295, class 5 |
| Insulation: | special polymer |
| Color code: | colored acc. to HD 308 (VDE 0293-308), see below from 6 conductors: black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334 from 3 conductors a green/yellow ground |
| Stranding: | specially adjusted layering |
| Inner jacket: | PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2 |
| Supporting shield: | high-tech yarn |
| Jacket material: | PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2 |
| Jacket color: | black (RAL 9005) |

Outstanding features:



- high winding and unwinding strength
- small outer diameter
- lighter cable weight
- correspond to low voltage guideline 73/23/EWG CE

Technical data:

| | |
|---|--|
| Nominal voltage: | U ₀ /U 0.6/1 kV |
| Testing voltage: | conductor/conductor: 4000 V |
| Current-carrying capacity: | acc. to VDE 0298-4, see chapter O 20 & 21 |
| Min. bending radius: <i>for laying and installation (fixed installation):</i> <i>for repeated winding action (flexible):</i> <i>guided on pulleys (flexible):</i> | 6 x O.D. 10 x O.D. 12 x O.D. |
| Temperature range: <i>static:</i> <i>flexible:</i> | -50/+90°C -40/+90°C |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2 |
| Oil resistance: | very good - TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2 |
| Chemical resistance: | good against acids, alkalines, solvents, hydraulic liquids, etc. |
| Weather resistance: | very good |
| Sunlight resistance: | very good - enhanced due to black jacket color |
| Tensile strength: | with reference to VDE 0298-3 section 7.1 |
| Mechanical characteristics: | the main mechanical characteristics accomplished by the PUR outer jacket are: - high tensile strength - high tear strength - high abrasion resistance - high notch resistance |
| Approvals: | CE, RoHS |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 |

| item no. | AWG/c | outer-ø ±10% inch | ±10% mm | cable weight ≈lbs/mft |
|-----------|---------------------------|-------------------------|------------|--------------------------|
| ▶ 7210415 | 16 AWG (≈ 27-29/30) / 4c | 0.346 | 8.8 | 78 |
| ▶ 7210515 | 16 AWG (≈ 27-29/30) / 5c | 0.378 | 9.6 | 94 |
| ▶ 7210715 | 16 AWG (≈ 27-29/30) / 7c | 0.461 | 11.7 | 136 |
| ▶ 7211215 | 16 AWG (≈ 27-29/30) / 12c | 0.646 | 16.4 | 228 |
| ▶ 7211815 | 16 AWG (≈ 27-29/30) / 18c | 0.642 | 16.3 | 287 |
| ▶ 7212415 | 16 AWG (≈ 27-29/30) / 24c | 0.772 | 19.6 | 384 |
| ▶ 7213615 | 16 AWG (≈ 27-29/30) / 36c | 0.870 | 22.1 | 536 |
| ▶ 7210425 | 14 AWG (≈ 46/30) / 4c | 0.402 | 10.2 | 113 |
| ▶ 7210525 | 14 AWG (≈ 46/30) / 5c | 0.441 | 11.2 | 138 |
| ▶ 7210725 | 14 AWG (≈ 46/30) / 7c | 0.535 | 13.6 | 200 |
| ▶ 7211225 | 14 AWG (≈ 46/30) / 12c | 0.764 | 19.4 | 341 |
| ▶ 7211825 | 14 AWG (≈ 46/30) / 18c | 0.764 | 19.4 | 426 |
| ▶ 7212425 | 14 AWG (≈ 46/30) / 24c | 0.929 | 23.6 | 574 |
| ▶ 7213625 | 14 AWG (≈ 46/30) / 36c | 1.039 | 26.4 | 804 |

| item no. | AWG/c | outer-ø ±10% inch | ±10% mm | cable weight ≈lbs/mft |
|-----------|--|-------------------------|------------|--------------------------|
| ▶ 7210440 | 12 AWG (≈ 52/28) / 4c | 0.488 | 12.4 | 172 |
| ▶ 7210460 | 10 AWG (≈ 78/28) / 4c | 0.567 | 14.4 | 244 |
| ▶ 7210560 | 10 AWG (≈ 78/28) / 5c | 0.614 | 15.6 | 294 |
| ▶ 7210470 | 8 AWG (≈ 77/26) / 4c | 0.705 | 17.9 | 393 |
| ▶ 7210480 | 6 AWG (≈ 122/26) / 4c | 0.882 | 22.4 | 608 |
| ▶ 7210580 | 6 AWG (≈ 122/26) / 5c | 0.984 | 25.0 | 760 |
| ▶ 7210390 | 4 AWG (≈ 190/26) / 3c + 10 AWG (≈ 78/28) / 3c | 0.953 | 24.2 | 791 |
| ▶ 7210395 | 2 AWG (≈ 272/26) / 3c + 10 AWG (≈ 78/28) / 3c | 1.102 | 28.0 | 1054 |
| ▶ 7210396 | 1 AWG (≈ 400/26) / 3c + 8 AWG (≈ 77/26) / 3c | 1.252 | 31.8 | 1511 |

Other dimensions and colors are available on request
Please mention the required winding length when placing the order.

HD 308 color code:

2c: blue - brown, 3c: green/yellow - blue - brown, 4c: green/yellow - brown - black - gray, 5c: green/yellow - blue - brown - black - gray


Reeling Cables

DR 720 P Highflex

PUR reeling cable, 0.6/1 kV



VIERSEN · DR 720 P Highflex 4 G 2.5 mm² CE

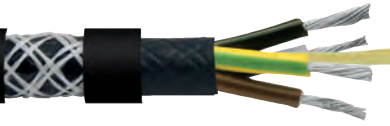

Marking for DR 720 P Highflex 7200425:

SAB BRÜCKSKES · D-VIERSEN · DR 720 P Highflex 4 G 2.5 mm² CE

Application: The DR 720 P Highflex is used for heavy applications, for example, motor cable reels hoists, transport systems, movable motors and farm vehicles with high mechanical stress.

Construction:

| | |
|---------------------------|--|
| Conductor: | bare copper strands acc. to IEC 60228, VDE 0295, class 5 |
| Insulation: | special polymer |
| Color code: | colored acc. to HD 308 (VDE 0293-308), see below from 6 conductors: black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334 from 3 conductors a green/yellow ground |
| Stranding: | specially adjusted layering around central suspension unit |
| Inner jacket: | PUR, TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2 |
| Supporting shield: | high-tech yarn |
| Jacket material: | PUR, TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2 |
| Jacket color: | black (RAL 9005) |

Outstanding features:



- path feed rate up to 120 m/min.
- extremely high winding and unwinding strength
- small outer diameter
- lighter cable weight
- correspond to low voltage guideline 73/23/EWG CE

Technical data:

| | |
|---|---|
| Nominal voltage: | Uo/U 0.6/1 kV |
| Testing voltage: | conductor/conductor: 4000 V |
| Current-carrying capacity: | acc. to VDE 0298-4, see chapter O/20 & 21 |
| Min. bending radius: <i>for laying and installation (fixed installation):</i> <i>for repeated winding action (flexible):</i> <i>guided on pulleys (flexible):</i> | ≤ 12 mm: 3 x O.D. >12 mm: 4 x O.D. 6 x O.D. 7.5 x O.D. |
| Temperature range: <i>static:</i> <i>flexible:</i> | -50/+90°C -40/+90°C |
| Halogen-free: | acc. to IEC 60754-1 + VDE 0482-754-1 |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2 |
| Oil resistance: | very good - TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2 |
| Chemical resistance: | good against acids, alkalines, solvents, hydraulic liquids, etc. |
| Weather resistance: | very good |
| Sunlight resistance: | very good - enhanced due to black jacket color |
| Tensile strength: | acc. to VDE 0298-3 section 7.1 |
| Mechanical characteristics: | the main mechanical characteristics accomplished by the PUR outer jacket are: - high tensile strength - high tear strength - high abrasion resistance - high notch resistance |
| Approvals: | CE, RoHS |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 |

| item no. | AWG/c | outer-ø | | cable weight ≈lbs/mft | min breaking load of suspension unit N |
|-----------|---------------------------|-----------|---------|--------------------------|--|
| | | ±10% inch | ±10% mm | | |
| ▶ 7200415 | 16 AWG (≈ 27-29/30) / 4c | 0.354 | 9.0 | 80 | 1340 |
| ▶ 7200515 | 16 AWG (≈ 27-29/30) / 5c | 0.386 | 9.8 | 95 | 1690 |
| ▶ 7200715 | 16 AWG (≈ 27-29/30) / 7c | 0.465 | 11.8 | 137 | 2150 |
| ▶ 7201215 | 16 AWG (≈ 27-29/30) / 12c | 0.654 | 16.6 | 241 | 2600 |
| ▶ 7201815 | 16 AWG (≈ 27-29/30) / 18c | 0.646 | 16.4 | 289 | 2600 |
| ▶ 7200425 | 14 AWG (≈ 46/30) / 4c | 0.409 | 10.4 | 114 | 1345 |
| ▶ 7200525 | 14 AWG (≈ 46/30) / 5c | 0.457 | 11.6 | 143 | 2100 |
| ▶ 7200725 | 14 AWG (≈ 46/30) / 7c | 0.543 | 13.8 | 201 | 2500 |
| ▶ 7201225 | 14 AWG (≈ 46/30) / 12c | 0.772 | 19.6 | 357 | 2900 |
| ▶ 7201825 | 14 AWG (≈ 46/30) / 18c | 0.776 | 19.7 | 431 | 3450 |
| ▶ 7202425 | 14 AWG (≈ 46/30) / 24c | 0.937 | 23.8 | 591 | 2700 |
| ▶ 7203025 | 14 AWG (≈ 46/30) / 30c | 1.047 | 26.6 | 738 | 4200 |
| ▶ 7205025 | 14 AWG (≈ 46/30) / 50c | 1.276 | 32.4 | 1168 | 6750 |

| item no. | AWG/c | outer-ø | | cable weight ≈lbs/mft | min breaking load of suspension unit N |
|-----------|--|-----------|---------|--------------------------|--|
| | | ±10% inch | ±10% mm | | |
| ▶ 7200440 | 12 AWG (≈ 52/28) / 4c | 0.488 | 12.4 | 171 | 1690 |
| ▶ 7201240 | 12 AWG (≈ 52/28) / 12c | 0.945 | 24.0 | 561 | 5000 |
| ▶ 7200460 | 10 AWG (≈ 78/28) / 4c | 0.583 | 14.8 | 248 | 1860 |
| ▶ 7200470 | 8 AWG (≈ 77/26) / 4c | 0.717 | 18.2 | 398 | 2300 |
| ▶ 7200480 | 6 AWG (≈ 122/26) / 4c | 0.894 | 22.7 | 615 | 2800 |
| ▶ 7200390 | 4 AWG (≈ 190/26) / 3c + 10 AWG (≈ 78/28) / 3c | 0.957 | 24.3 | 798 | 3300 |
| ▶ 7200490 | 4 AWG (≈ 190/26) / 4 | 1.059 | 26.9 | 908 | 3300 |
| ▶ 7200395 | 2 AWG (≈ 272/26) / 3c + 10 AWG (≈ 78/28) / 3c | 1.106 | 28.1 | 1060 | 3300 |
| ▶ 7200495 | 2 AWG (≈ 272/26) / 4 | 1.240 | 31.5 | 1272 | 3300 |
| ▶ 7200396 | 1 AWG (≈ 400/26) / 3c + 8 AWG (≈ 77/26) / 3c | 1.256 | 31.9 | 1521 | 3800 |

Other dimensions and colors are available on request
Please mention the required winding length when placing the order.

HD 308 color code:

2c: blue - brown, 3c: green/yellow - blue - brown, 4c: green/yellow - brown - black - gray, 5c: green/yellow - blue - brown - black - gray

Profibus-DP Cables acc. to IEC 61158-2

S PB 634 HT

S PB 634 HT Hybrid

High temperature, Profibus-DP
continuous flex cable

High temperature Profibus-DP
continuous flex cable with supply conductors

+180°C

SAB BUS

RÖCKSKES · D-VIERSEN · S PB 634 HT 2x0.34mm² CE



Marking for S PB 634 HT 36341000:

SAB BRÖCKSKES · D-VIERSEN · S PB 634 HT 2x0.34mm² CE

Application: For use in cable tracks with extreme ambient temperatures.

| Construction: | S PB 634 HT | S PB 634 HT Hybrid |
|----------------------------------|---|---|
| Dimension: | 2 x 0.34 mm ² | 2 x 0.34 mm ² + supply conductors |
| Conductor: | tinned copper strands, extra fine wires | tinned copper strands, extra fine wires |
| Conductor insulation: | PFA | PFA |
| Color code: | red, green | 0.34 mm ² red, green supply conductors acc. to HD 308 (see below) |
| Stranding: | 0.34 mm ² twisted to pairs | 0.34 mm ² twisted to pairs |
| Wrapping: | PTFE foil | PTFE foil |
| Inner jacket: | FEP | special Besilen® |
| Shielding 0.34 mm ² : | tinned copper braiding | tinned copper braiding |
| Inner jacket: | --- | FEP |
| Stranding: | --- | element 0.34 mm ² together with supply conductors |
| Wrapping: | --- | PTFE foil |
| Outer jacket: | special Besilen® | special Besilen® |
| Jacket color: | blue lilac (similar RAL 4005) | blue lilac (similar RAL 4005) |

| Technical data: | S PB 634 HT | S PB 634 HT Hybrid |
|--|---|--|
| Item number: | 36341000 | see table below |
| Nominal voltage: | --- | U ₀ /U 300/500 V (supply conductors) |
| Peak operating voltage: | max. 350 V (0.34 mm ²) | max. 350 V (0.34 mm ²) |
| Testing voltage conductor/conductor: conductor/shielding: | 1500 V 1200 V | 0.34 mm ² supply conductors 1500 V 2000 V 1200 V 2000 V |
| Temperature range static: flexible: short-term use: | 5 x O.D. 10 x O.D. 15 x O.D. | 5 x O.D. 10 x O.D. 15 x O.D. |
| Min. bending radius fixed installation: free movement: continuously flexible: | - 40°C / + 180°C - 25°C / + 180°C + 250°C | - 40°C / + 180°C - 25°C / + 180°C + 250°C |
| Characteristic impedance PB element (3-20 MHz): | 150 Ω ± 10% | 150 Ω ± 10% |
| Fire performance: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2 | |
| Flexibility: | very good | |
| Absence of harmful substances: | acc. to RoHS directive of the European Union | |

| item no. | type | AWG | outer-ø | | cable weight ≈lbs/mft |
|------------|--------------------|-----------------------|--------------|------------|--------------------------|
| | | | ±10% inch | ±10% mm | |
| ▶ 36341000 | S PB 634 HT | 22 AWG/2c | 0.370 | 9.4 | 81 |
| ▶ 36341307 | S PB 634 HT Hybrid | 22 AWG/2c + 19 AWG/3c | 0.472 | 12.0 | 128 |
| ▶ 36341407 | S PB 634 HT Hybrid | 22 AWG/2c + 19 AWG/4c | 0.472 | 12.0 | 128 |
| ▶ 36341510 | S PB 634 HT Hybrid | 22 AWG/2c + 18 AWG/5c | 0.480 | 12.2 | 154 |
| ▶ 36341315 | S PB 634 HT Hybrid | 22 AWG/2c + 16 AWG/3c | 0.496 | 12.6 | 144 |
| ▶ 36341415 | S PB 634 HT Hybrid | 22 AWG/2c + 16 AWG/4c | 0.496 | 12.6 | 158 |



Outstanding features:

- extreme temperature resistance
- high notch resistance
- very good flexibility

HD 308 color code:

2c: blue - brown; 3c: green/yellow - blue - brown; 4c: green/yellow - brown - black - gray; 5c: green/yellow - blue - brown - black - gray



866-722-2974 • www.sabcable.com

Ethernet Cables

CATLine CAT 6A HT

Gigabit Ethernet cable – high temperature resistant

+180°C


SAB CATLine

16314631- FEP Version

26AWG 16314631  AWM Style 21618 150°C 600V CE

Marking for CATLine CAT 6A HT 16314631:

SAB BRÖCKSKES · D-VIERSEN · CATLine Cat.6A HT 4x2x26AWG 16314631  AWM Style 21618 150°C 600V CE



16324631- PFA Version

CATLine CAT 6A HT 4x2x26AWG 16324631 CE

Marking for CATLine CAT 6A HT 16314631:

SAB BRÖCKSKES · D-VIERSEN · CATLine Cat.6A HT 4x2x26AWG 16324631 CE



Construction:

| | |
|-------------------------|---|
| Conductor: | |
| <i>FEP:</i> | bare copper strands, fine wires |
| <i>PFA:</i> | silver-plated copper strands, fine wires |
| Insulation: | FEP or PFA |
| Color code: | white/blue, white/orange, white/green, white/brown |
| Stranding: | twisted to pairs |
| Wrapping: | PETP foil |
| Shielding: | |
| <i>FEP:</i> | alu. foil + tinned copper braiding |
| <i>PFA:</i> | alu. foil + silver-plated copper braiding |
| Jacket material: | FEP or PFA |
| Jacket color: | green (similar RAL 6018) |

Outstanding features:

- high temperature resistant
- low temperature resistant
- flame retardant and self-extinguishing
- oil and chemical resistant
- UL recognized- FEP version only

Technical data:

| | | | |
|---------------------------------------|---|--------------|-------------|
| Peak operating voltage: | max. 90 V | | |
| Voltage UL: | 600 V | | |
| Testing voltage: | | FEP: | PFA: |
| | conductor/conductor: | 2000 V | 750 V |
| | conductor/shielding: | 2000 V | 750 V |
| Min. bending radius: | | | |
| <i>fixed installation:</i> | 5 x O.D. | | |
| <i>free movement:</i> | 10 x O.D. | | |
| Temperature range: | FEP: | PFA: | |
| <i>static:</i> | -90/+180°C | -90/+250°C | |
| <i>flexible:</i> | -55/+180°C | -55/+250°C | |
| | UL: | up to +150°C | |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, UL VW-1 | | |
| <i>FEP:</i> | | | |
| Oil resistance: | very good | | |
| Chemical resistance: | very good against acids, halogens, bases, chlorinated solvents as well as organic and inorganic compounds | | |
| Character impedance: | 100Ω ± 10Ω, accomplishes the electrical and transmission requirements with high frequency with reference to EN 50288-10-2 (CAT 6A) | | |
| Approvals: | FEP: UR AWM Style 21618, CE, RoHS PFA: CE, RoHS | | |
| Application: | suitable for EtherCAT and EtherNET/IP applications | | |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 | | |

| item no. | type | dimensions AWG | max. cond.-ø mm | outer-ø | | cable weight ≈lbs/mt |
|------------|------|-------------------|-----------------------|--------------|------------|----------------------------|
| | | | | ±10% inch | ±10% mm | |
| ▶ 16314631 | FEP | 26 (≈ 7/34)/4pr | 1.05 | 0.228 | 5.8 | 36 |
| ▶ 16324631 | PFA | 26 (≈ 7/34)/4pr | 1.05 | 0.217 | 5.5 | 33 |

Also possible as a
cable assembly with
M12 or RJ 45 plug



FEP and PFA Cables

FEP and PFA insulated stranded hook-up wire

Li6Ybl, Li6Yvz, and LiPFAvn with extended temperature range

375 V

max. +250°C



Construction:

| | |
|-----------------------------|---|
| Conductor: | |
| <i>Li6Ybl:</i> | bare tinned copper strands |
| <i>Li6Yvz:</i> | tinned copper strands |
| <i>LiPFAvn:</i> | nickel-plated copper strands acc. to ASTM B 286 |
| Insulation: | |
| <i>Li6Ybl & Li6Yvz:</i> | FEP, 6Y11 acc. to VDE 0207-6 |
| <i>LiPFAvn:</i> | PFA, 51Y11 acc. to VDE 0207-6 |

Outstanding features:

- excellent resistance against chemicals and solvents
- excellent temperature resistance and flexibility at low temperatures
- excellent electrical insulating characteristics with low, nearly frequency-independent dielectric characteristics
- UL recognized

Technical data:

| | | |
|---------------------------------------|---|---|
| Peak operating voltage: | max. 375 V | |
| Voltage UL: | 600 V | |
| Testing voltage: | 2000 V | |
| Installation: | for one single bend the inner bending radius must not be smaller than 0.5 x outer diameter of the insulated strands | |
| Radiation resistance: | FEP: 1 x 10 ⁷ cJ/kg | PFA: 1 x 10 ⁸ cJ/kg |
| Temperature range: | FEP: <i>static:</i> -90/+180°C <i>flexible:</i> -55/+180°C <i>short-term use:</i> +200°C | PFA: -90/+250°C -55/+250°C +260°C |
| | UL: up to +150°C | up to +250°C |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, UL FT2 | |
| Oil resistance: | very good acc. to UL standard 758, at 80°C after 80 days | |
| Chemical resistance: | very good against acids, halogens, bases, chlorinated solvents as well as organic and inorganic compounds | |
| Approvals: | UR AWM, CE, RoHS | |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 | |

Li6Ybl - bare copper / FEP insulation

| item no. | AWG/stranding | outer-ø | | cable weight ≈lbs/mft |
|--------------|---------------|-----------------|---------------|--------------------------|
| | | approx. inch | approx. mm | |
| ▶ 3339 .. 28 | 28 AWG/7 | 0.028 | 0.70 | 1 |
| ▶ 3339 .. 26 | 26 AWG/7 | 0.031 | 0.80 | 1 |
| ▶ 3339 .. 24 | 24 AWG/7 | 0.037 | 0.93 | 2 |
| ▶ 3339 .. 22 | 22 AWG/7 | 0.043 | 1.08 | 3 |
| ▶ 3339 .. 20 | 20 AWG/7 | 0.050 | 1.28 | 4 |

Color code for single conductors:

| | | |
|------------|-------------|-------------|
| 01 = black | 05 = yellow | 09 = orange |
| 02 = blue | 06 = green | 11 = red |
| 03 = brown | 07 = violet | 15 = nature |
| 04 = gray | 08 = white | |

Li6Yvz - tinned copper / FEP insulation

| item no. | AWG/stranding | outer-ø | | cable weight ≈lbs/mft |
|--------------|---------------|-----------------|---------------|--------------------------|
| | | approx. inch | approx. mm | |
| ▶ 3340 .. 28 | 28 AWG/7 | 0.028 | 0.70 | 1 |
| ▶ 3340 .. 26 | 26 AWG/7 | 0.031 | 0.80 | 1 |
| ▶ 3340 .. 24 | 24 AWG/7 | 0.037 | 0.93 | 2 |
| ▶ 3340 .. 22 | 22 AWG/7 | 0.043 | 1.08 | 3 |
| ▶ 3340 .. 20 | 20 AWG/7 | 0.050 | 1.28 | 4 |
| ▶ 3340 .. 16 | 16 AWG/7 | 0.070 | 1.79 | 9 |

LiPFAvn - nickel-plated copper / PFA insulation

| item no. | AWG/stranding | outer-ø | | cable weight ≈lbs/mft |
|--------------|---------------|-----------------|---------------|--------------------------|
| | | approx. inch | approx. mm | |
| ▶ 3344 .. 28 | 28 AWG /7 | 0.028 | 0.71 | 1 |
| ▶ 3344 .. 26 | 26 AWG/7 | 0.031 | 0.80 | 1 |
| ▶ 3344 .. 24 | 24 AWG/7 | 0.037 | 0.93 | 2 |
| ▶ 3344 .. 22 | 22 AWG/7 | 0.043 | 1.08 | 3 |
| ▶ 3344 .. 20 | 20 AWG/7 | 0.050 | 1.28 | 4 |

Other dimensions and colors are available on request



Possible on request:

- ETFE insulated strands

ETFE, FEP, and PFA Cables

ETFE, FEP, and PFA insulated stranded hook-up wire

Li7Ybl, Li6Ybl, Li6Yvz, and LiPFAvn with extended temperature range

900 V

max. +250°C



Construction:

| | |
|---|---|
| Conductor: Li7Ybl & Li6Ybl: Li6Yvz LiPFAvn: | bare copper strands tinned copper strands nickel-plated copper strands acc. to ASTM B 286 |
| Insulation: Li7Ybl: Li6Ybl & Li6Yvz: LiPFAvn: | ETFE, 7Y11 acc. to VDE 0207-6 FEP, 6Y11 acc. to VDE 0207-6 PFA, 51Y11 acc. to VDE 0207-6 |

Outstanding features:

- **ETFE:**
 - high resistance against chemicals and solvents
 - low and high temperature resistance
 - good electrical insulating characteristics with low, nearly frequency-independent dielectric characteristics
- **FEP + PFA:**
 - excellent resistance against chemicals and solvents
 - excellent temperature resistance and flexibility at low temperatures
 - excellent electrical insulating characteristics with low, nearly frequency-independent dielectric characteristics
 - UL recognized

Technical data:

| | | | |
|---------------------------------------|---|---|---|
| Peak operating voltage: | max. 900 V | | |
| Voltage UL: | FEP/PFA: 600 V | | |
| Testing voltage: | 2500 V | | |
| Installation: | for one single bend the inner bending radius must not be smaller than 0.5 x outer diameter of the insulated strands | | |
| Radiation resistance: | ETFE: 2 x 10 ⁸ cJ/kg | FEP: 1 x 10 ⁷ cJ/kg | PFA: 1 x 10 ⁶ cJ/kg |
| Temperature range: | ETFE: static: flexible: short-term use: | FEP: -90/+180°C -55/+180°C +200°C | PFA: -90/+250°C -55/+250°C +260°C |
| | UL: | up to +150°C | up to 250°C |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, UL FT2 (FEP and PFA version) | | |
| <i>Li6Ybl, Li6Yvz, LiPFAvn:</i> | | | |
| Oil resistance: | very good acc. to UL standard 758, at 80°C after 80 days | | |
| Chemical resistance: | very good against acids, halogens, bases, chlorinated solvents as well as organic and inorganic compounds | | |
| Approvals: | Li6Ybl, Li6Yvz, LiPFAvn: UR AWM, CE, RoHS | Li7Ybl: CE, RoHS | |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 | | |

Li7Ybl bare copper / ETFE insulation

| item no. | AWG/stranding | outer-ø | | cable weight ≈lbs/mft |
|--------------|---------------|--------------|------------|--------------------------|
| | | approx. inch | approx. mm | |
| ▶ 3345 .. 28 | 28 AWG /7 | 0.037 | 0.93 | 1 |
| ▶ 3345 .. 26 | 26 AWG /7 | 0.041 | 1.03 | 2 |
| ▶ 3345 .. 24 | 24 AWG /7 | 0.046 | 1.16 | 2 |
| ▶ 3345 .. 22 | 22 AWG /7 | 0.052 | 1.31 | 3 |
| ▶ 3345 .. 20 | 20 AWG /7 | 0.059 | 1.51 | 5 |
| ▶ 3345 .. 18 | 18 AWG /7 | 0.070 | 1.78 | 7 |
| ▶ 3345 .. 16 | 16 AWG /7 | 0.076 | 1.94 | 9 |
| ▶ 3345 .. 14 | 14 AWG /7 | 0.091 | 2.30 | 14 |
| ▶ 3345 .. 12 | 12 AWG /7 | 0.109 | 2.76 | 22 |

Li6Yvz tinned copper / FEP insulation

| item no. | AWG/stranding | outer-ø | | cable weight ≈lbs/mft |
|--------------|---------------|--------------|------------|--------------------------|
| | | approx. inch | approx. mm | |
| ▶ 3349 .. 28 | 28 AWG /7 | 0.037 | 0.93 | 1 |
| ▶ 3349 .. 26 | 26 AWG /7 | 0.041 | 1.03 | 2 |
| ▶ 3349 .. 24 | 24 AWG /7 | 0.046 | 1.16 | 2 |
| ▶ 3349 .. 22 | 22 AWG /7 | 0.052 | 1.31 | 3 |
| ▶ 3349 .. 20 | 20 AWG /7 | 0.059 | 1.51 | 5 |
| ▶ 3349 .. 18 | 18 AWG /7 | 0.070 | 1.78 | 8 |
| ▶ 3349 .. 16 | 16 AWG /7 | 0.076 | 1.94 | 9 |
| ▶ 3349 .. 14 | 14 AWG /7 | 0.091 | 2.30 | 15 |
| ▶ 3349 .. 12 | 12 AWG /7 | 0.109 | 2.76 | 22 |

Li6Ybl bare copper / FEP insulation

| item no. | AWG/stranding | outer-ø | | cable weight ≈lbs/mft |
|--------------|---------------|--------------|------------|--------------------------|
| | | approx. inch | approx. mm | |
| ▶ 3348 .. 28 | 28 AWG /7 | 0.037 | 0.93 | 1 |
| ▶ 3348 .. 26 | 26 AWG /7 | 0.041 | 1.03 | 2 |
| ▶ 3348 .. 24 | 24 AWG /7 | 0.046 | 1.16 | 2 |
| ▶ 3348 .. 22 | 22 AWG /7 | 0.052 | 1.31 | 3 |
| ▶ 3348 .. 20 | 20 AWG /7 | 0.059 | 1.51 | 5 |
| ▶ 3348 .. 18 | 18 AWG /7 | 0.070 | 1.78 | 8 |
| ▶ 3348 .. 16 | 16 AWG /7 | 0.076 | 1.94 | 9 |
| ▶ 3348 .. 14 | 14 AWG /7 | 0.091 | 2.30 | 15 |
| ▶ 3348 .. 12 | 12 AWG /7 | 0.109 | 2.76 | 22 |

LiPFAvn nickel-plated copper / PFA insulation

| item no. | AWG/stranding | outer-ø | | cable weight ≈lbs/mft |
|--------------|---------------|--------------|------------|--------------------------|
| | | approx. inch | approx. mm | |
| ▶ 3353 .. 28 | 28 AWG /7 | 0.038 | 0.96 | 1 |
| ▶ 3353 .. 26 | 26 AWG /7 | 0.042 | 1.06 | 2 |
| ▶ 3353 .. 24 | 24 AWG /7 | 0.046 | 1.17 | 2 |
| ▶ 3353 .. 22 | 22 AWG /7 | 0.053 | 1.34 | 3 |
| ▶ 3353 .. 20 | 20 AWG /7 | 0.061 | 1.54 | 5 |
| ▶ 3353 .. 18 | 18 AWG /7 | 0.071 | 1.81 | 7 |
| ▶ 3353 .. 16 | 16 AWG /7 | 0.078 | 1.97 | 9 |

Other dimensions and colors are available on request

Color code for single conductors:

| | | |
|------------|-------------|-------------|
| 01 = black | 05 = yellow | 09 = orange |
| 02 = blue | 06 = green | 11 = red |
| 03 = brown | 07 = violet | 15 = nature |
| 04 = gray | 08 = white | |

FEP Cables

TD 801 F

FEP data cable with extended temperature range

+180°C

AWG 22/3c •  AWM Style 21618 I/II A/B 150°C 600V FT1 FT2 38010322 



Marking for TD 801 F 38010322:

SAB BRÖCKSKES · D-VIERSEN · TD 801 F AWG 22/3c •  AWM Style 21618 I/II A/B 150°C 600V FT1 FT2 38010322 

Construction:

| | |
|-------------------------|--|
| Conductor: | tinned copper strands acc. to ASTM B 286 |
| Insulation: | FEP, 6Y11 acc. to VDE 0207-6 |
| Color code: | DIN 47100, see below |
| Stranding: | in layers |
| Jacket material: | FEP, 6YM1 acc. to VDE 0207-6 |
| Jacket color: | white (RAL 1013) |

Technical data:

| | | |
|---------------------------------------|---|-----------------------------|
| Peak operating voltage: | max. 375 V | |
| Voltage UL/cUL: | 600 V | |
| Testing voltage: | conductor/conductor: 2000 V | |
| Min. bending radius: | 7.5 x O.D. | |
| Radiation resistance: | 1 x 10 ⁷ cJ/kg | |
| Temperature range: | DIN VDE | UL/cUL: up to +150°C |
| <i>static:</i> | -90/+180°C | |
| <i>flexible:</i> | -55/+180°C | |
| <i>short-term use:</i> | +200°C | |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, UL FT1, FT2 | |
| Oil resistance: | very good acc. to UL standard 758, at 80°C after 80 days | |
| Chemical resistance: | very good against acids, halogens, bases, chlorinated solvents as well as organic and inorganic compounds | |
| Approvals: | UR, cUR, CE, RoHS | |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 | |

Outstanding features:



- excellent resistance against chemicals and solvents
- excellent temperature resistance and flexibility at low temperatures
- excellent electrical insulating characteristics with low, nearly frequency-independent dielectric characteristics
- UL/cUL recognized

| item no. | no. of conductors | outer-ø | | cable weight ≈lbs/mft |
|--|-------------------|----------|--------|--------------------------|
| | | max inch | max mm | |
| ▶ 28 AWG (7 strand) • 0.08 mm² | | | | |
| 38010228 | 2 | 0.079 | 2.0 | 4 |
| 38010328 | 3 | 0.083 | 2.1 | 5 |
| 38010428 | 4 | 0.091 | 2.3 | 7 |
| 38010528 | 5 | 0.098 | 2.5 | 8 |
| 38010728 | 7 | 0.106 | 2.7 | 10 |
| 38011028 | 10 | 0.134 | 3.4 | 14 |
| 38011228 | 12 | 0.138 | 3.5 | 16 |
| ▶ 26 AWG (7 strand) • 0.14 mm² | | | | |
| 38010226 | 2 | 0.087 | 2.2 | 5 |
| 38010326 | 3 | 0.094 | 2.4 | 7 |
| 38010426 | 4 | 0.098 | 2.5 | 9 |
| 38010526 | 5 | 0.110 | 2.8 | 10 |
| 38010726 | 7 | 0.118 | 3.0 | 13 |
| 38011026 | 10 | 0.157 | 4.0 | 18 |
| 38011226 | 12 | 0.157 | 4.0 | 22 |

| item no. | no. of conductors | outer-ø | | cable weight ≈lbs/mft |
|--|-------------------|----------|--------|--------------------------|
| | | max inch | max mm | |
| ▶ 24 AWG (7 strand) • 0.25 mm² | | | | |
| 38010224 | 2 | 0.098 | 2.5 | 7 |
| 38010324 | 3 | 0.102 | 2.6 | 9 |
| 38010424 | 4 | 0.114 | 2.9 | 11 |
| 38010524 | 5 | 0.122 | 3.1 | 14 |
| 38010624 | 6 | 0.138 | 3.5 | 17 |
| 38010724 | 7 | 0.134 | 3.4 | 18 |
| 38011024 | 10 | 0.177 | 4.5 | 26 |
| 38011224 | 12 | 0.185 | 4.7 | 30 |
| ▶ 22 AWG (7 strand) • 0.34 mm² | | | | |
| 38010222 | 2 | 0.110 | 2.8 | 9 |
| 38010322 | 3 | 0.114 | 2.9 | 12 |
| 38010422 | 4 | 0.126 | 3.2 | 15 |
| 38010522 | 5 | 0.138 | 3.5 | 19 |
| 38010722 | 7 | 0.161 | 4.1 | 26 |
| 38011022 | 10 | 0.201 | 5.1 | 37 |
| 38011222 | 12 | 0.209 | 5.3 | 43 |

| item no. | no. of conductors | outer-ø | | cable weight ≈lbs/mft |
|--|-------------------|----------|--------|--------------------------|
| | | max inch | max mm | |
| ▶ 20 AWG (7 strand) • 0.50 mm² | | | | |
| 38010220 | 2 | 0.126 | 3.2 | 12 |
| 38010320 | 3 | 0.134 | 3.4 | 17 |
| 38010420 | 4 | 0.146 | 3.7 | 22 |
| 38010520 | 5 | 0.173 | 4.4 | 28 |
| 38010720 | 7 | 0.177 | 4.5 | 36 |
| 38011020 | 10 | 0.232 | 5.9 | 53 |
| 38011220 | 12 | 0.248 | 6.3 | 62 |

Other dimensions and colors are available on request

DIN 47100 color code:

#1- white, #2- brown, #3- green, #4- yellow, #5- gray, #6- pink, #7- blue, #8- red, #9- black, #10- violet, #11- gray-pink, #12- red-blue



Possible on request:

- ETFE or PFA insulated strands

FEP Cables

TD 833 CF

FEP data cable with extended temperature range and overall copper shielding

+180°C



AWM Style 21618 III A/B 150°C 600V FT1 FT2 38330320 CE

Marking for TD 833 CF 38330320:

SAB BRÜCKSKES · D-VIERSEN · TD 833 CF AWG 20/3c eULus AWM Style 21618 III A/B 150°C 600V FT1 FT2 38330320 CE

Construction:

| | |
|-------------------------|--|
| Conductor: | tinned copper strands acc. to ASTM B 286 |
| Insulation: | FEP, 6Y11 acc. to VDE 0207-6 |
| Color code: | DIN 47100, see below |
| Stranding: | in layers |
| Wrapping: | PETP foil |
| Shielding: | tinned copper braiding |
| Jacket material: | FEP, 6YM1 acc. to VDE 0207-6 |
| Jacket color: | white (RAL 1013) |

Technical data:

| | |
|---------------------------------------|--|
| Peak operating voltage: | max. 375 V |
| Voltage UL/cUL: | 600 V |
| Testing voltage: | conductor/conductor: 2000 V conductor/shield: 2000 V |
| Min. bending radius: | 7.5 x O.D. |
| Radiation resistance: | 1 x 10 ⁷ cJ/kg |
| Temperature range: | DIN VDE UL/cUL: up to +150°C <i>static:</i> -90/+180°C <i>flexible:</i> -55/+180°C <i>short-term use:</i> +200°C |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, UL FT1, FT2 |
| Oil resistance: | very good acc. to UL standard 758, at 80°C after 80 days |
| Chemical resistance: | very good against acids, halogens, bases, chlorinated solvents as well as organic and inorganic compounds |
| Approvals: | UR, cUR, CE, RoHS |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 |

Outstanding features:

- excellent resistance against chemicals and solvents
- excellent temperature resistance and flexibility at low temperatures
- excellent electrical insulating characteristics with low, nearly frequency-independent dielectric characteristics
- UL/cUL recognized

| item no. | no. of conductors | outer-ø approx. inch | outer-ø approx. mm | cable weight ≈lbs/mft |
|--|-------------------|----------------------|--------------------|-----------------------|
| ▶ 28 AWG (7 strand) ▪ 0.08 mm² | | | | |
| 38330228 | 2 | 0.094 | 2.4 | 8 |
| 38330328 | 3 | 0.102 | 2.6 | 9 |
| 38330428 | 4 | 0.110 | 2.8 | 12 |
| 38330528 | 5 | 0.118 | 3.0 | 13 |
| 38330728 | 7 | 0.126 | 3.2 | 16 |
| 38331028 | 10 | 0.157 | 4.0 | 22 |
| 38331228 | 12 | 0.157 | 4.0 | 24 |
| ▶ 26 AWG (7 strand) ▪ 0.14 mm² | | | | |
| 38330226 | 2 | 0.106 | 2.7 | 11 |
| 38330326 | 3 | 0.110 | 2.8 | 12 |
| 38330426 | 4 | 0.122 | 3.1 | 14 |
| 38330526 | 5 | 0.138 | 3.5 | 16 |
| 38330726 | 7 | 0.138 | 3.5 | 19 |
| 38331026 | 10 | 0.173 | 4.4 | 28 |
| 38331226 | 12 | 0.177 | 4.5 | 30 |
| 38331426 | 14 | 0.185 | 4.7 | 34 |

| item no. | no. of conductors | outer-ø approx. inch | outer-ø approx. mm | cable weight ≈lbs/mft |
|--|-------------------|----------------------|--------------------|-----------------------|
| ▶ 24 AWG (7 strand) ▪ 0.25 mm² | | | | |
| 38330224 | 2 | 0.122 | 3.1 | 13 |
| 38330324 | 3 | 0.122 | 3.1 | 15 |
| 38330424 | 4 | 0.130 | 3.3 | 17 |
| 38330524 | 5 | 0.150 | 3.8 | 22 |
| 38330724 | 7 | 0.157 | 4.0 | 25 |
| 38331024 | 10 | 0.197 | 5.0 | 36 |
| 38331224 | 12 | 0.205 | 5.2 | 40 |
| ▶ 22 AWG (7 strand) ▪ 0.34 mm² | | | | |
| 38330222 | 2 | 0.130 | 3.3 | 15 |
| 38330322 | 3 | 0.138 | 3.5 | 18 |
| 38330422 | 4 | 0.150 | 3.8 | 22 |
| 38330522 | 5 | 0.165 | 4.2 | 27 |
| 38330622 | 6 | 0.181 | 4.6 | 32 |
| 38330722 | 7 | 0.173 | 4.4 | 33 |
| 38331022 | 10 | 0.220 | 5.6 | 47 |
| 38331222 | 12 | 0.228 | 5.8 | 54 |

| item no. | no. of conductors | outer-ø approx. inch | outer-ø approx. mm | cable weight ≈lbs/mft |
|--|-------------------|----------------------|--------------------|-----------------------|
| ▶ 20 AWG (7 strand) ▪ 0.50 mm² | | | | |
| 38330220 | 2 | 0.146 | 3.7 | 20 |
| 38330320 | 3 | 0.157 | 4.0 | 25 |
| 38330420 | 4 | 0.169 | 4.3 | 30 |
| 38330520 | 5 | 0.189 | 4.8 | 37 |
| 38330620 | 6 | 0.205 | 5.2 | 43 |
| 38330720 | 7 | 0.205 | 5.2 | 46 |
| 38330820 | 8 | 0.232 | 5.9 | 56 |
| 38331020 | 10 | 0.252 | 6.4 | 64 |
| 38331220 | 12 | 0.260 | 6.6 | 73 |

Other dimensions and colors are available on request

DIN 47100 color code:

#1- white, #2- brown, #3- green, #4- yellow, #5- gray, #6- pink, #7- blue, #8- red, #9- black, #10- violet, #11- gray-pink, #12- red-blue, #13- white-green, #14- brown-green



Possible on request:

- ETFE or PFA insulated strands

FEP Cables

TD 838 CF TP

FEP data cable, twisted pairs with extended temperature range and overall copper shielding

+180°C

UL AWM Style 21618 I/II A/B 150°C 600V FT1 FT2 38380326 CE 



Marking for TD 838 CF TP 38380326:

SAB BRÜCKSKES · D-VIERSEN · TD 838 CF TP AWG 26/3pr UL AWM Style 21618 I/II A/B 150°C 600V FT1 FT2 38380326 CE

Construction:

| | |
|-------------------------|--|
| Conductor: | tinned copper strands acc. to ASTM B 286 |
| Insulation: | FEP, 6Y11 acc. to VDE 0207-6 |
| Color code: | DIN 47100, see below |
| Stranding: | conductors twisted to pairs, pairs together in specially adjusted layering |
| Wrapping: | foil |
| Shield: | tinned copper braiding |
| Jacket material: | FEP, 6YM1 acc. to VDE 0207-6 |
| Jacket color: | white (RAL 1013) |

Technical data:

| | | |
|---------------------------------------|---|-----------------------------|
| Peak operating voltage: | max. 375 V | |
| Voltage UL/cUL: | 600 V | |
| Testing voltage: | conductor/conductor: | 2000 V |
| | conductor/shield: | 2000 V |
| Min. bending radius: | 7.5 x O.D. | |
| Radiation resistance: | 1 x 10 ⁷ cJ/kg | |
| Temperature range: | DIN VDE | UL/cUL: up to +150°C |
| <i>static:</i> | -90/+180°C | |
| <i>flexible:</i> | -55/+180°C | |
| <i>short-term use:</i> | +200°C | |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, UL FT1, FT2 | |
| Oil resistance: | very good acc. to UL standard 758, at 80°C after 80 days | |
| Chemical resistance: | very good against acids, halogens, bases, chlorinated solvents as well as organic and inorganic compounds | |
| Approvals: | UR, cUR, CE, RoHS | |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 | |

Outstanding features:

- excellent resistance against chemicals and solvents
- excellent temperature resistance and flexibility at low temperatures
- excellent electrical insulating characteristics with low, nearly frequency-independent dielectric characteristics
- UL/cUL recognized

| item no. | no. of pairs | outer-ø approx. inch | outer-ø approx. mm | cable weight ≈lbs/mft |
|--|--------------|----------------------|--------------------|-----------------------|
| ▶ 28 AWG (7 strand) ▪ 0.08 mm² | | | | |
| 38380228 | 2 | 0.126 | 3.2 | 13 |
| 38380328 | 3 | 0.142 | 3.6 | 17 |
| 38380428 | 4 | 0.165 | 4.2 | 20 |
| 38380528 | 5 | 0.181 | 4.6 | 25 |
| 38380628 | 6 | 0.185 | 4.7 | 27 |
| ▶ 26 AWG (7 strand) ▪ 0.14 mm² | | | | |
| 38380226 | 2 | 0.138 | 3.5 | 15 |
| 38380326 | 3 | 0.161 | 4.1 | 21 |
| 38380426 | 4 | 0.185 | 4.7 | 24 |
| 38380526 | 5 | 0.205 | 5.2 | 29 |
| 38380626 | 6 | 0.209 | 5.3 | 35 |

| item no. | no. of pairs | outer-ø approx. inch | outer-ø approx. mm | cable weight ≈lbs/mft |
|--|--------------|----------------------|--------------------|-----------------------|
| ▶ 24 AWG (7 strand) ▪ 0.25 mm² | | | | |
| 38380224 | 2 | 0.157 | 4.0 | 20 |
| 38380324 | 3 | 0.177 | 4.5 | 25 |
| 38380424 | 4 | 0.217 | 5.5 | 33 |
| 38380524 | 5 | 0.228 | 5.8 | 34 |
| 38380624 | 6 | 0.232 | 5.9 | 45 |
| ▶ 22 AWG (7 strand) ▪ 0.34 mm² | | | | |
| 38380222 | 2 | 0.181 | 4.6 | 25 |
| 38380322 | 3 | 0.205 | 5.2 | 34 |
| 38380422 | 4 | 0.232 | 5.9 | 42 |
| 38380522 | 5 | 0.256 | 6.5 | 51 |
| 38380622 | 6 | 0.272 | 6.9 | 60 |

| item no. | no. of pairs | outer-ø approx. inch | outer-ø approx. mm | cable weight ≈lbs/mft |
|--|--------------|----------------------|--------------------|-----------------------|
| ▶ 20 AWG (7 strand) ▪ 0.50 mm² | | | | |
| 38380220 | 2 | 0.201 | 5.1 | 33 |
| 38380320 | 3 | 0.232 | 5.9 | 45 |
| 38380420 | 4 | 0.268 | 6.8 | 57 |
| 38380520 | 5 | 0.295 | 7.5 | 70 |
| 38380620 | 6 | 0.307 | 7.8 | 83 |
| ▶ 18 AWG (7 strand) ▪ 1.00 mm² | | | | |
| 38380418 | 4 | 0.319 | 8.1 | 83 |

Other dimensions and colors are available on request

DIN 47100 color code:

#1- white/brown, #2- green/yellow, #3- gray/pink, #4- blue/red, #5- black/purple, #6- gray-pink/red-blue



Possible on request:

- ETFE or PFA insulated strands


FEP Cables

TA 866 F

FEP connection cable with extended temperature range

+180°C

WM Style 21618 I/II A/B 150°C 600V FT1 FT2 38660415 CE



Marking for TA 866 F 38660415:

SAB BRÖCKSKES · D-VIERSEN · TA 866 F AWG 16/4c eULus AWM Style 21618 I/II A/B 150°C 600V FT1 FT2 38660415 CE

Construction:

| | |
|-------------------------|--|
| Conductor: | tinned copper strands acc. to IEC 60228, VDE 0295, class 5 |
| Insulation: | FEP, 6Y11 acc. to VDE 0207-6 |
| Color code: | up to 5 conductors- HD 308 (VDE 0293-308) see below, from 6 conductors- black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334 from 3 conductors a green/yellow ground |
| Stranding: | in layers |
| Jacket material: | FEP, 6YM1 acc. to VDE 0207-6 |
| Jacket color: | black (RAL 9005) |

Outstanding features:

- excellent resistance against chemicals and solvents
- excellent temperature resistance and flexibility at low temperatures
- excellent electrical insulating characteristics with low, nearly frequency-independent dielectric characteristics
- UL/cUL recognized

Technical data:

| | | |
|---------------------------------------|---|-----------------------------|
| Nominal voltage: | U ₀ /U 300/500 V | |
| Voltage UL/cUL: | 600 V | |
| Testing voltage: | conductor/conductor: 2000 V | |
| Min. bending radius: | 7.5 x O.D. | |
| Radiation resistance: | 1 x 10 ⁷ cJ/kg | |
| Temperature range: | DIN VDE | UL/cUL: up to +150°C |
| <i>static:</i> | -90/+180°C | |
| <i>flexible:</i> | -55/+180°C | |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, UL FT1, FT2 | |
| Oil resistance: | very good acc. to UL standard 758, at 80°C after 80 days | |
| Chemical resistance: | very good against acids, halogens, bases, chlorinated solvents as well as organic and inorganic compounds | |
| Approvals: | UR AWM, cUR AWM, CE, RoHS | |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 | |

| item no. | no. of conductors incl. ground | outer-ø ±10% inch | outer-ø ±10% mm | cable weight ≈lbs/mft |
|---------------------------------------|--------------------------------|-------------------|-----------------|-----------------------|
| ▶ 24 AWG ▪ 0.25 mm² | | | | |
| 38660202 | 2 | 0.114 | 2.9 | 9 |
| 38660302 | 3 | 0.122 | 3.1 | 12 |
| 38660402 | 4 | 0.134 | 3.4 | 15 |
| 38660502 | 5 | 0.146 | 3.7 | 18 |
| 38660702 | 7 | 0.165 | 4.2 | 24 |
| 38661002 | 10 | 0.213 | 5.4 | 35 |
| 38661202 | 12 | 0.220 | 5.6 | 42 |
| ▶ 20 AWG ▪ 0.50 mm² | | | | |
| 38660205 | 2 | 0.138 | 3.5 | 14 |
| 38660305 | 3 | 0.146 | 3.7 | 19 |
| 38660405 | 4 | 0.165 | 4.2 | 25 |
| 38660505 | 5 | 0.181 | 4.6 | 31 |
| 38660705 | 7 | 0.205 | 5.2 | 41 |
| 38661005 | 10 | 0.260 | 6.6 | 58 |
| 38661205 | 12 | 0.268 | 6.8 | 68 |
| ▶ 19 AWG ▪ 0.75 mm² | | | | |
| 38660207 | 2 | 0.161 | 4.1 | 18 |
| 38660307 | 3 | 0.173 | 4.4 | 25 |
| 38660407 | 4 | 0.209 | 5.3 | 32 |
| 38660507 | 5 | 0.213 | 5.4 | 41 |
| 38660707 | 7 | 0.244 | 6.2 | 53 |
| 38661007 | 10 | 0.303 | 7.7 | 76 |
| 38661207 | 12 | 0.315 | 8.0 | 90 |

| item no. | no. of conductors incl. ground | outer-ø ±10% inch | outer-ø ±10% mm | cable weight ≈lbs/mft |
|---------------------------------------|--------------------------------|-------------------|-----------------|-----------------------|
| ▶ 18 AWG ▪ 1.00 mm² | | | | |
| 38660210 | 2 | 0.169 | 4.3 | 22 |
| 38660310 | 3 | 0.189 | 4.8 | 29 |
| 38660410 | 4 | 0.217 | 5.5 | 39 |
| 38660510 | 5 | 0.228 | 5.8 | 49 |
| 38660710 | 7 | 0.244 | 6.2 | 63 |
| 38661010 | 10 | 0.319 | 8.1 | 91 |
| 38661210 | 12 | 0.331 | 8.4 | 107 |
| ▶ 16 AWG ▪ 1.50 mm² | | | | |
| 38660215 | 2 | 0.193 | 4.9 | 29 |
| 38660315 | 3 | 0.209 | 5.3 | 41 |
| 38660415 | 4 | 0.240 | 6.1 | 52 |
| 38660515 | 5 | 0.272 | 6.9 | 66 |
| 38660715 | 7 | 0.283 | 7.2 | 87 |
| 38661015 | 10 | 0.370 | 9.4 | 131 |
| 38661215 | 12 | 0.382 | 9.7 | 147 |
| ▶ 14 AWG ▪ 2.50 mm² | | | | |
| 38660225 | 2 | 0.228 | 5.8 | 43 |
| 38660325 | 3 | 0.244 | 6.2 | 60 |
| 38660425 | 4 | 0.295 | 7.5 | 77 |
| 38660525 | 5 | 0.303 | 7.7 | 99 |
| 38660725 | 7 | 0.331 | 8.4 | 130 |
| 38661025 | 10 | 0.433 | 11.0 | 187 |
| 38661225 | 12 | 0.453 | 11.5 | 223 |

| item no. | no. of conductors incl. ground | outer-ø ±10% inch | outer-ø ±10% mm | cable weight ≈lbs/mft |
|---------------------------------------|--------------------------------|-------------------|-----------------|-----------------------|
| ▶ 12 AWG ▪ 4.00 mm² | | | | |
| 38660240 | 2 | 0.276 | 7.0 | 63 |
| 38660340 | 3 | 0.299 | 7.6 | 91 |
| 38660440 | 4 | 0.327 | 8.3 | 118 |
| 38660540 | 5 | 0.370 | 9.4 | 152 |
| 38660740 | 7 | 0.406 | 10.3 | 201 |
| ▶ 10 AWG ▪ 6.00 mm² | | | | |
| 38660260 | 2 | 0.343 | 8.7 | 98 |
| 38660360 | 3 | 0.370 | 9.4 | 143 |
| 38660460 | 4 | 0.409 | 10.4 | 185 |
| 38660560 | 5 | 0.457 | 11.6 | 240 |
| 38660760 | 7 | 0.504 | 12.8 | 308 |

Other dimensions and colors are available on request

HD 308 color code: up to 5 conductors

- 1c: natural
- 2c: blue, brown
- 3c: green/yellow, blue, brown
- 4c: green/yellow, brown, black, gray
- 5c: green/yellow, blue, brown, black, gray



Possible on request:

- ETFE or PFA insulated strands


FEP Cables

TA 867 CF

FEP connection cable with extended temperature range and overall copper shielding

+180°C

1 Style 21618 I/II A/B 150°C 600V FT1 FT2 38670415 CE



Marking for TA 867 CF 38670415:

SAB BRÖCKSKES · D-VIERSEN · TA 867 CF AWG 16/4c AWM Style 21618 I/II A/B 150°C 600V FT1 FT2 38670415 CE

Construction:

| | |
|-------------------------|--|
| Conductor: | tinned copper strands acc. to IEC 60228, VDE 0295, class 5 |
| Insulation: | FEP, 6Y11 acc. to VDE 0207-6 |
| Color code: | up to 5 conductors- HD 308 (VDE 0293-308), see below from 6 conductors- black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334 from 3 conductors a green/yellow ground |
| Stranding: | in layers |
| Wrapping: | foil |
| Shield: | tinned copper braiding |
| Jacket material: | FEP, 6YM1 acc. to VDE 0207-6 |
| Jacket color: | black (RAL 9005) |

Technical data:

| | | |
|---------------------------------------|---|-----------------------------|
| Peak operating voltage: | U ₀ /U 300/500 V | |
| Voltage UL/cUL: | 600 V | |
| Testing voltage: | conductor/conductor: | 2000 V |
| | conductor/shield: | 2000 V |
| Min. bending radius: | 7.5 x O.D. | |
| Radiation resistance: | 1 x 10 ⁷ cJ/kg | |
| Temperature range: | DIN VDE | UL/cUL: up to +150°C |
| | <i>static:</i> | -90/+180°C |
| | <i>flexible:</i> | -55/+180°C |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, UL FT1, FT2 | |
| Oil resistance: | very good acc. to UL standard 758, at 80°C after 80 days | |
| Chemical resistance: | very good against acids, halogens, bases, chlorinated solvents as well as organic and inorganic compounds | |
| Approvals: | UR AWM, cUR AWM, CE, RoHS | |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 | |

Outstanding features:

- excellent resistance against chemicals and solvents
- excellent temperature resistance and flexibility at low temperatures
- excellent electrical insulating characteristics with low, nearly frequency-independent dielectric characteristics
- UL/cUL recognized

| item no. | no. of conductors incl. ground | outer-ø ±10% inch | outer-ø ±10% mm | cable weight ≈lbs/mft |
|---------------------------------------|--------------------------------|-------------------|-----------------|-----------------------|
| ▶ 24 AWG ▪ 0.25 mm² | | | | |
| 38670202 | 2 | 0.134 | 3.4 | 15 |
| 38670302 | 3 | 0.142 | 3.6 | 17 |
| 38670402 | 4 | 0.157 | 4.0 | 23 |
| 38670502 | 5 | 0.169 | 4.3 | 26 |
| 38670702 | 7 | 0.185 | 4.7 | 32 |
| 38671002 | 10 | 0.201 | 5.1 | 43 |
| 38671202 | 12 | 0.240 | 6.1 | 51 |
| ▶ 20 AWG ▪ 0.50 mm² | | | | |
| 38670205 | 2 | 0.161 | 4.1 | 22 |
| 38670305 | 3 | 0.169 | 4.3 | 27 |
| 38670405 | 4 | 0.185 | 4.7 | 32 |
| 38670505 | 5 | 0.205 | 5.2 | 40 |
| 38670705 | 7 | 0.224 | 5.7 | 51 |
| 38671005 | 10 | 0.272 | 6.9 | 69 |
| 38671205 | 12 | 0.291 | 7.4 | 82 |
| ▶ 19 AWG ▪ 0.75 mm² | | | | |
| 38670207 | 2 | 0.181 | 4.6 | 26 |
| 38670307 | 3 | 0.193 | 4.9 | 33 |
| 38670407 | 4 | 0.213 | 5.4 | 41 |
| 38670507 | 5 | 0.232 | 5.9 | 51 |
| 38670707 | 7 | 0.252 | 6.4 | 63 |
| 38671007 | 10 | 0.319 | 8.1 | 89 |
| 38671207 | 12 | 0.335 | 8.5 | 104 |

| item no. | no. of conductors incl. ground | outer-ø ±10% inch | outer-ø ±10% mm | cable weight ≈lbs/mft |
|---------------------------------------|--------------------------------|-------------------|-----------------|-----------------------|
| ▶ 18 AWG ▪ 1.00 mm² | | | | |
| 38670210 | 2 | 0.189 | 4.8 | 30 |
| 38670310 | 3 | 0.205 | 5.2 | 39 |
| 38670410 | 4 | 0.220 | 5.6 | 49 |
| 38670510 | 5 | 0.244 | 6.2 | 59 |
| 38670710 | 7 | 0.264 | 6.7 | 74 |
| 38671010 | 10 | 0.339 | 8.6 | 106 |
| 38671210 | 12 | 0.350 | 8.9 | 122 |
| ▶ 16 AWG ▪ 1.50 mm² | | | | |
| 38670215 | 2 | 0.217 | 5.5 | 39 |
| 38670315 | 3 | 0.228 | 5.8 | 50 |
| 38670415 | 4 | 0.248 | 6.3 | 62 |
| 38670515 | 5 | 0.283 | 7.2 | 80 |
| 38670715 | 7 | 0.303 | 7.7 | 101 |
| 38671015 | 10 | 0.398 | 10.1 | 158 |
| 38671215 | 12 | 0.409 | 10.4 | 175 |
| ▶ 14 AWG ▪ 2.50 mm² | | | | |
| 38670225 | 2 | 0.248 | 6.3 | 53 |
| 38670325 | 3 | 0.264 | 6.7 | 70 |
| 38670425 | 4 | 0.291 | 7.4 | 91 |
| 38670525 | 5 | 0.323 | 8.2 | 112 |
| 38670725 | 7 | 0.350 | 8.9 | 145 |
| 38671025 | 10 | 0.461 | 11.7 | 220 |
| 38671225 | 12 | 0.488 | 12.4 | 254 |

| item no. | no. of conductors incl. ground | outer-ø ±10% inch | outer-ø ±10% mm | cable weight ≈lbs/mft |
|---------------------------------------|--------------------------------|-------------------|-----------------|-----------------------|
| ▶ 12 AWG ▪ 4.00 mm² | | | | |
| 38670240 | 2 | 0.299 | 7.6 | 77 |
| 38670340 | 3 | 0.319 | 8.1 | 105 |
| 38670440 | 4 | 0.346 | 8.8 | 135 |
| ▶ 10 AWG ▪ 6.00 mm² | | | | |
| 38670360 | 3 | 0.398 | 10.1 | 168 |

Other dimensions and colors are available on request

HD 308 color code: up to 5 conductors

- 1c: natural
- 2c: blue, brown
- 3c: green/yellow, blue, brown
- 4c: green/yellow, brown, black, gray
- 5c: green/yellow, blue, brown, black, gray



Possible on request:

- ETFE or PFA insulated strands



866-722-2974 • www.sabcable.com

Compensation & Extension Cables

Fiber-glass insulated extension cables for thermocouples

Th LGS with fiber-glass braiding and steel wire armoring

Th LRS with special fiber-glass braiding and steel wire armoring



Th LGS · Th LRS

Construction:

| | |
|--------------------|--|
| Insulation: | Th LGS: fiber-glass Th LRS: special fiber-glass |
| Stranding: | conductors together |
| Braiding: | Th LGS: fiber-glass Th LRS: special fiber-glass |
| Armoring: | galvanized steel wire armoring with tracer |
| Shape: | round |

Technical data:

| | |
|---|---|
| Min. bending radius: | 12 x O.D. |
| Temperature range of insulation: | Th LGS: max. +250°C Th LRS: max. +400°C |
| Halogen-free: | acc. to IEC 60754-1 + VDE 0482-754-1 |
| Burning characteristics: | no flame propagation acc. to IEC 60332-3-24 + VDE 0482-332-3-24 resp. IEC 60332-3-25 + VDE 0482-332-3-25 Cat. C resp. D Flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2. |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 |

| | | |
|---|--|--|
| Type: Conductor construction: | Th LGS: 0.22 mm ² = 7 x 0.20 mm ø 0.50 mm ² = 16 x 0.20 mm ø 1.00 mm ² = 32 x 0.20 mm ø | Th LRS: 0.22 mm ² = 7 x 0.20 mm ø 0.50 mm ² = 16 x 0.20 mm ø 1.00 mm ² = 32 x 0.20 mm ø |
|---|--|--|

Th LGS

| item no. | type | dimensions mm ² | for thermocouple | outer-ø inch | mm | cable weight ≈lbs/mft |
|-------------|--------------|-------------------------------|---------------------|-----------------|-----|-----------------------------|
| ▶ 47110...* | Th 20 LGS | 2 x 0.22 | Fe-CuNi | 0.122 | 3.1 | 1 |
| ▶ 47111...* | Th 50 LGS | 2 x 0.50 | Fe-CuNi | 0.146 | 3.7 | 3 |
| ▶ 47112...* | Th 100 LGS | 2 x 1.00 | Fe-CuNi | 0.177 | 4.5 | 3 |
| ▶ 47113...* | Th 20-4 LGS | 4 x 0.22 | Fe-CuNi | 0.138 | 3.5 | 2 |
| ▶ 47114...* | Th 50-4 LGS | 4 x 0.50 | Fe-CuNi | 0.165 | 4.2 | 3 |
| ▶ 47115...* | Th 100-4 LGS | 4 x 1.00 | Fe-CuNi | 0.213 | 5.4 | 5 |
| ▶ 47110...* | Th 20 LGS | 2 x 0.22 | NiCr-Ni | 0.122 | 3.1 | 1 |
| ▶ 47111...* | Th 50 LGS | 2 x 0.50 | NiCr-Ni | 0.146 | 3.7 | 2 |
| ▶ 47112...* | Th 100 LGS | 2 x 1.00 | NiCr-Ni | 0.177 | 4.5 | 3 |
| ▶ 47113...* | Th 20-4 LGS | 4 x 0.22 | NiCr-Ni | 0.138 | 3.5 | 2 |
| ▶ 47114...* | Th 50-4 LGS | 4 x 0.50 | NiCr-Ni | 0.165 | 4.2 | 3 |
| ▶ 47115...* | Th 100-4 LGS | 4 x 1.00 | NiCr-Ni | 0.213 | 5.4 | 5 |

Th LRS

| item no. | type | dimensions mm ² | for thermocouple | outer-ø inch | mm | cable weight ≈lbs/mft |
|-------------|--------------|-------------------------------|---------------------|-----------------|-----|-----------------------------|
| ▶ 47210...* | Th 20 LRS | 2 x 0.22 | Fe-CuNi | 0.122 | 3.1 | 1 |
| ▶ 47211...* | Th 50 LRS | 2 x 0.50 | Fe-CuNi | 0.146 | 3.7 | 3 |
| ▶ 47212...* | Th 100 LRS | 2 x 1.00 | Fe-CuNi | 0.177 | 4.5 | 3 |
| ▶ 47213...* | Th 20 -4 LRS | 4 x 0.22 | Fe-CuNi | 0.138 | 3.5 | 2 |
| ▶ 47214...* | Th 50 -4 LRS | 4 x 0.50 | Fe-CuNi | 0.165 | 4.2 | 3 |
| ▶ 47215...* | Th 100-4 LRS | 4 x 1.00 | Fe-CuNi | 0.213 | 5.4 | 5 |
| ▶ 47210...* | Th 20 LRS | 2 x 0.22 | NiCr-Ni | 0.122 | 3.1 | 1 |
| ▶ 47211...* | Th 50 LRS | 2 x 0.50 | NiCr-Ni | 0.146 | 3.7 | 3 |
| ▶ 47212...* | Th 100 LRS | 2 x 1.00 | NiCr-Ni | 0.177 | 4.5 | 3 |
| ▶ 47213...* | Th 20 -4 LRS | 4 x 0.22 | NiCr-Ni | 0.138 | 3.5 | 2 |
| ▶ 47214...* | Th 50 -4 LRS | 4 x 0.50 | NiCr-Ni | 0.165 | 4.2 | 3 |
| ▶ 47215...* | Th 100-4 LRS | 4 x 1.00 | NiCr-Ni | 0.213 | 5.4 | 5 |

Compensation & Extension Cables

FEP insulated cables

A 18 L · A 18-022 L · A 19 L · A 19-022 L with overall copper shield



A 18 L · A 18-022 L



A 19 L · A 19-022 L

Construction:

| | |
|-------------------------|---|
| Insulation: | FEP |
| Stranding: | 2 conductors together |
| Wrapping: | A 18 L, A 18-22 L: PETP foil |
| Shielding: | A 19 L, A 19-022 L: tinned copper braiding |
| Jacket material: | FEP |
| Shape: | round |
| Conductor construction: | strand |

Technical data:

| | |
|----------------------------------|---|
| Min. bending radius: | 12 x O.D. |
| Radiation resistance: | 1 x 10 ⁷ cJ/kg |
| Temperature range of insulation: | static: -90/+180°C flexible: -55/+180°C |
| Insulation resistance: | > 1MΩ x km |
| Burning characteristics: | no flame propagation acc. to IEC 60332-3-24 + VDE 0482-332-3-24 resp. IEC 60332-3-25 + VDE 0482-332-3-25 Cat. C resp. D Flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2. |
| Chemical resistance: | very good against fats, oils, salts and acids |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 |

| Type: | A 18 L: | A 18-022 L: | A 19 L: | A 19-022 L: |
|--------------------------|---------------------|----------------------|---------------------|----------------------|
| Conductor cross section: | 1.5 mm ² | 0.22 mm ² | 1.5 mm ² | 0.22 mm ² |
| Outer diameter: | approx. 4.8 mm | approx. 2.5 mm | approx. 5.5 mm | approx. 3.0 mm |
| Weight/100m: | approx. 4.2 kg | approx. 1.0 kg | approx. 5.9 kg | approx. 1.9 kg |

IEC 60584

| for thermocouple | EMK at 100°C in mV | cable type | A 18 L item no. | A 18-022 L item no. | A 19 L item no. | A 19-022 L item no. |
|------------------|--------------------|------------|-----------------|---------------------|-----------------|---------------------|
| Type T | 4.28 | TX | 4338958 | 4331958 | 4358958 | 4351958 |
| Type J | 5.27 | JX | 4338952 | 4331952 | 4358952 | 4351952 |
| Type K | 4.10 | KCA | 4338995 | 4331995 | 4358995 | 4351995 |
| Type K | 4.10 | KCB | 4338999 | 4331999 | 4358999 | 4351999 |
| Type K | 4.10 | KX | 4338954 | 4331954 | 4358954 | 4351954 |
| Type E | 6.32 | EX | 4338953 | 4331953 | 4358953 | 4351953 |
| Type R/S | 0.65 | R/SCB | 4338997 | 4331997 | 4358997 | 4351997 |
| Type N | 2.77 | NC | 4338991 | 4331991 | 4358991 | 4351991 |

DIN 43710 / 43714 (not valid for type B*)

We continue to manufacture compensating and extension cables with color code acc. to DIN 43714 and the basic values of DIN 43710.

| for thermocouple | EMK at 100°C in mV | cable type | A 18 L item no. | A 18-022 L item no. | A 19 L item no. | A 19-022 L item no. |
|------------------|--------------------|------------|-----------------|---------------------|-----------------|---------------------|
| Type L | 5.37 | LX | 4338992 | 4331992 | 4358992 | 4351992 |
| Type K | 4.10 | KCA | 4338994 | 4331994 | 4358994 | 4351994 |
| Type R/S | 0.65 | R/SCB | 4338996 | 4331996 | 4358996 | 4351996 |
| Type U | 4.25 | UX | 4338998 | 4331998 | 4358998 | 4351998 |
| Type B* | 0.00 | BC-100 | 4338901 | 4331901 | 4358901 | 4351901 |
| Type B* | 0.033 | BC-200 | 4338902 | 4331902 | 4358902 | 4351902 |

* Not standardized compensating cable for thermocouples type B with application temperatures up to 100°C resp. 200°C.

C = compensating cables · X = extension cables

Compensation & Extension Cables

Besilen® insulated cables

A 3 Ln · A 4 Ln with steel wire armoring



A 3 Ln



A 4 Ln



Also available
with cross-sections
1.0 mm², 0.75 mm²,
0.5 mm² and 0.22 mm²

Construction:

| | |
|--------------------------------|--|
| Insulation: | Besilen® EI2 acc. to EN 50363-1 + VDE 0207-363-1 |
| Stranding: | 2 conductors parallel |
| Jacket material: | Besilen® EM9 acc. to EN 50363-2-1 + VDE 0207-363-2-1 |
| Armoring: | A 4 Ln: tinned steel wire armoring with tracer |
| Shape: | oval |
| Conductor construction: | strand |

Technical data:

| | |
|--|---|
| Min. bending radius: | A 3 Ln: 10 x O.D. A 4 Ln: 12 x O.D. |
| Radiation resistance: | 2 x 10 ⁷ cJ/kg |
| Temperature range of insulation: | <i>static:</i> -40/+180°C <i>flexible:</i> -25/+180°C <i>short time use:</i> +250°C |
| Insulation resistance: | > 1MΩ x km |
| Halogen-free: | acc. to IEC 60754-1 + VDE 0482-754-1 |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2 |
| Corrosiveness of conflagration gases: | in compliance with IEC 60754-2 + VDE 0482-754-2 - no development of corrosive conflagration gases |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 |

| | | |
|--------------------------|----------------------|----------------------|
| Type: | A 3 Ln: | A 4 Ln |
| Conductor cross section: | 1.5 mm ² | 1.5 mm ² |
| Outer diameter: | approx. 3.7 x 6.2 mm | approx. 4.5 x 7.0 mm |
| Weight/100m: | approx. 4.6 kg | approx. 7.5 kg |

IEC 60584

| for thermocouple | EMK at 100°C in mV | cable type | A 3 Ln item no. | A 4 Ln item no. |
|------------------|-----------------------|------------|---------------------------|---------------------------|
| Type T | 4.28 | TX | 4138958 | 4168958 |
| Type J | 5.27 | JX | 4138952 | 4168952 |
| Type K | 4.10 | KCA | 4138995 | 4168995 |
| Type K | 4.10 | KCB | 4138999 | 4168999 |
| Type K | 4.10 | KX | 4138954 | 4168954 |
| Type E | 6.32 | EX | 4138953 | 4168953 |
| Type R/S | 0.65 | R/SCB | 4138997 | 4168997 |
| Type N | 2.77 | NC | 4138991 | 4168991 |

DIN 43710 / 43714 (not valid for type B*)

We continue to manufacture compensating and extension cables with color code acc. to DIN 43714 and the basic values of DIN 43710.

| for thermocouple | EMK at 100°C in mV | cable type | A 3 Ln item no. | A 4 Ln item no. |
|------------------|-----------------------|------------|---------------------------|---------------------------|
| Type L | 5.37 | LX | 4138992 | 4168992 |
| Type K | 4.10 | KCA | 4138994 | 4168994 |
| Type R/S | 0.65 | R/SCB | 4138996 | 4168996 |
| Type U | 4.25 | UX | 4138998 | 4168998 |
| Type B* | 0.00 | BC-100 | 4138901 | 4168901 |
| Type B* | 0.033 | BC-200 | 4138902 | 4168902 |

* Not standardized compensating cable for thermocouples type B with application temperatures up to 100°C resp. 200°C.
C = compensating cables · X = extension cables

Compensation & Extension Cables

Besilen® insulated cables

A 11 Lr · A 11-4 Lr · A 11 Dr with fiber-glass braiding and steel wire armoring



A 11 Lr · A 11-4 Lr



A 11 Dr



Also available with cross-sections 1.0 mm², 0.75 mm², 0.5 mm² and 0.22 mm²

Construction:

| | |
|--------------------------------|---|
| Insulation: | Besilen® EI2 acc. to EN 50363-1 + VDE 0207-363-1 |
| Stranding: | 2 resp. 4 conductors together |
| Braiding: | fiber-glass with tracer |
| Armoring: | tinned steel wire armoring with tracer |
| Shape: | round |
| Conductor construction: | A 11 LR, A 11-4 Lr: strand A 11 DR: wire |

Technical data:

| | |
|--|--|
| Min. bending radius: | A 11 Lr, A 11-4 Lr: 10 x O.D. A 11 Dr: 12 x O.D. |
| Temperature range of insulation: | <i>static:</i> -40/+180°C <i>flexible:</i> -25/+180°C <i>short-time use:</i> +250°C |
| Insulation resistance: | > 1MΩ x km |
| Halogen-free: | acc. to IEC 60754-1 + VDE 0482-754-1 |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2 |
| Corrosiveness of conflagration gases: | in compliance with IEC 60754-2 + VDE 0482-754-2 - no development of corrosive conflagration gases |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 |

| | | | |
|--------------------------|---------------------|---------------------|---------------------|
| Type: | A 11 Lr: | A 11-4 Lr | A 11 Dr: |
| Conductor cross section: | 1.5 mm ² | 1.5 mm ² | 1.5 mm ² |
| Outer diameter: | approx. 6.3 mm | approx. 7.3 mm | approx. 5.5 mm |
| Weight/100m: | approx. 5.9 kg | approx. 9.6 kg | approx. 6.4 kg |

IEC 60584

| for thermocouple | EMK at 100°C in mV | cable type | A 11 Lr item no. | A 11-4 Lr item no. | A 11 Dr item no. |
|------------------|--------------------|------------|------------------|--------------------|------------------|
| Type T | 4.28 | TX | 4218958 | 4210458 | 4238988 |
| Type J | 5.27 | JX | 4218952 | 4210452 | 4238982 |
| Type K | 4.10 | KCA | 4218995 | 4210495 | 4238915 |
| Type K | 4.10 | KCB | 4218999 | 4210499 | 4238919 |
| Type K | 4.10 | KX | 4218954 | 4210454 | 4238984 |
| Type E | 6.32 | EX | 4218953 | 4210453 | 4238983 |
| Type R/S | 0.65 | R/SCB | 4218997 | 4210497 | 4238917 |
| Type N | 2.77 | NC | 4218991 | 4210491 | 4238911 |

DIN 43710 / 43714 (not valid for type B*)

We continue to manufacture compensating and extension cables with color code acc. to DIN 43714 and the basic values of DIN 43710.

| for thermocouple | EMK at 100°C in mV | cable type | A 11 Lr item no. | A 11-4 Lr item no. | A 11 Dr item no. |
|------------------|--------------------|------------|------------------|--------------------|------------------|
| Type L | 5.37 | LX | 4218992 | 4210492 | 4238912 |
| Type K | 4.10 | KCA | 4218994 | 4210494 | 4238914 |
| Type R/S | 0.65 | R/SCB | 4218996 | 4210496 | 4238916 |
| Type U | 4.25 | UX | 4218998 | 4210498 | 4238918 |
| Type B* | 0.00 | BC-100 | 4218901 | 4210401 | 4238921 |
| Type B* | 0.033 | BC-200 | 4218902 | 4210402 | 4238922 |

* Not standardized compensating cable for thermocouples type B with application temperatures up to 100°C resp. 200°C.

C = compensating cables · X = extension cables

Special Cables

Special single conductor

Glass fiber insulated strands with excellent temperature resistance

excellent
temperature
resistance

+400°C



Application: e.g. in metallurgy and rolling mill technology.

Construction:

| | |
|------------------------|---|
| Conductor: | nickel-plated copper strands |
| Wrapping: | multiple wrapping with mica tape |
| Braiding: | glass fiber |
| Impregnation: | PTFE impregnating lacquer |
| Identification: | red tracer thread in external shielding |

Outstanding features:

- excellent heat resistance
- flame resistant

Technical data:

| | |
|---------------------------------------|---|
| Nominal voltage: | U ₀ /U 300/500 V |
| Testing voltage: | 2200 V |
| Min. bending radius: | 5 x O.D. |
| Temperature range | |
| <i>static:</i> | max. +400°C |
| <i>flexible:</i> | max. +400°C |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2 |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 |

| item no. | AWG | outer-ø | | cable weight ≈lbs/mft |
|------------|------------|---------|------|--------------------------|
| | | inch | mm | |
| ▶ 32869035 | 350 MCM/1c | 0.933 | 23.7 | 1246 |

Other dimensions and colors are possible on request.



Single conductor
in other dimensions
on request

Special Cables

Special connection conductor

Connection cable with excellent temperature resistance

excellent
temperature
resistance

+400°C



Application: e.g. in metallurgy and rolling mill technology.

Construction:

| | |
|----------------------|---|
| Conductor: | nickel-plated copper strands |
| Insulation: | glass fiber |
| Impregnation: | PU-lacquer |
| Color code: | brown, black, gray, green-yellow tracer in glass fiber braiding |
| Stranding: | conductors together |
| Braiding: | glass fiber |
| Armoring: | stainless steel wire armoring (VA) |

Technical data:

| | |
|---------------------------------------|---|
| Nominal voltage: | U ₀ /U 300/500 V |
| Testing voltage: | 2500 V |
| Min. bending radius: | |
| <i>fixed installation:</i> | 5 x O.D. |
| <i>free movement:</i> | 10 x O.D. |
| Temperature range | |
| <i>static:</i> | max. +400°C |
| <i>flexible:</i> | max. +400°C |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2 |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 |

Outstanding features:



- halogen-free
- excellent heat resistance
- flame resistant

| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|---------------------------------------|--------------------------------|---------|------|-----------------------|
| | | inch | mm | |
| ▶ 14 AWG ▪ 2.50 mm² | | | | |
| 32869066 | 3 | 0.374 | 9.5 | 128 |
| 32869039 | 4 | 0.409 | 10.4 | 161 |
| ▶ 12 AWG ▪ 4.00 mm² | | | | |
| 32869040 | 4 | 0.504 | 12.8 | 234 |

Other dimensions and colors are possible on request.



Other dimensions
on request

Special Cables

Special connection cable

Silicone cable with fiber-glass braiding

+180°C



Application: For the wiring of motors /generators / transformers. Suitable for the potting with impregnating materials for example with epoxy resin. Residues can be easily removed from the silicone impregnated surfaces.

Construction:

| | |
|----------------------|---|
| Conductor: | tinned copper strands acc. to IEC 60228, VDE 0295, class 5 |
| Wrapping: | non-woven tape |
| Insulation: | special silicone |
| Color code | |
| 450/750 V: | white |
| 3.8/6.6 kV: | gray |
| 8.0/13.8 kV: | black |
| Braiding: | fiber-glass |
| Impregnation: | special silicone |

Outstanding features:



- halogen-free
- flexible at low temperatures
- heat resistant
- good mechanical characteristics
- fiber-glass braiding up to +400°C

Technical data:

| | |
|--|---|
| Nominal voltage: | U ₀ /U 450/750 V U ₀ /U 3.8/6.6 V U ₀ /U 8.0/13.8 V |
| Testing voltage: | 450/750 V = 2500 V 3.8/6.6 kV = 15000 V 8.0/13.8 kV = 30000 V |
| Min. bending radius: | 7.5 x O.D. |
| Radiation resistance: | 2 x 10 ⁷ cJ/kg |
| Temperature range | |
| static: | -40/+180°C |
| flexible: | -25/+180°C |
| short-term use: | +250°C |
| Halogen-free: | acc. to IEC 60754-1 + VDE 0482-754-1 |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2 |
| Corrosiveness of conflagration gases: | in compliance with IEC 60754-2 + VDE 0482-754-2 - no development of corrosive conflagration gases |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 |

450/750 V

| item no. | AWG | outer-ø | | cable weight ≈lbs/mft |
|------------|-----------|---------|------|--------------------------|
| | | inch | mm | |
| ▶ 0123.... | 10AWG/1c | 0.209 | 5.3 | 48 |
| ▶ 0123.... | 8AWG/1c | 0.272 | 6.9 | 84 |
| ▶ 0123.... | 6AWG/1c | 0.311 | 7.9 | 120 |
| ▶ 0123.... | 4AWG/1c | 0.398 | 10.1 | 187 |
| ▶ 0123.... | 2AWG/1c | 0.453 | 11.5 | 256 |
| ▶ 0123.... | 1AWG/1c | 0.516 | 13.1 | 368 |
| ▶ 0123.... | 2/0AWG/1c | 0.606 | 15.4 | 485 |
| ▶ 0123.... | 3/0AWG/1c | 0.720 | 18.3 | 675 |
| ▶ 0123.... | 4/0AWG/1c | 0.795 | 20.2 | 820 |

Other dimensions and colors are possible on request.

3.8/6.6 kV

| item no. | AWG | outer-ø | | cable weight ≈lbs/mft |
|------------|-----------|---------|------|--------------------------|
| | | inch | mm | |
| ▶ 0123.... | 6AWG/1c | 0.406 | 10.3 | 151 |
| ▶ 0123.... | 4AWG/1c | 0.476 | 12.1 | 218 |
| ▶ 0123.... | 2AWG/1c | 0.531 | 13.5 | 292 |
| ▶ 0123.... | 1AWG/1c | 0.594 | 15.1 | 400 |
| ▶ 0123.... | 2/0AWG/1c | 0.685 | 17.4 | 536 |
| ▶ 0123.... | 3/0AWG/1c | 0.768 | 19.5 | 693 |
| ▶ 0123.... | 4/0AWG/1c | 0.843 | 21.4 | 840 |

Other dimensions and colors are possible on request.

8.0/13.8 kV

| item no. | AWG | outer-ø | | cable weight ≈lbs/mft |
|------------|-----------|---------|------|--------------------------|
| | | inch | mm | |
| ▶ 0123.... | 8AWG/1c | 0.469 | 11.9 | 151 |
| ▶ 0123.... | 6AWG/1c | 0.508 | 12.9 | 192 |
| ▶ 0123.... | 4AWG/1c | 0.579 | 14.7 | 259 |
| ▶ 0123.... | 1AWG/1c | 0.681 | 17.3 | 445 |
| ▶ 0123.... | 2/0AWG/1c | 0.772 | 19.6 | 585 |
| ▶ 0123.... | 3/0AWG/1c | 0.854 | 21.7 | 745 |

Other dimensions and colors are possible on request.



Part #
on request

Festoon Cable

Besilen® (silicone) insulated connection cable with glass fiber braiding, inner jacket and overall copper shielding

+180°C



Application: For festoon suspension e.g. in crane systems with very high ambient temperatures.

Construction:

| | |
|----------------------|--|
| Conductor: | tinned copper strands acc. to IEC 60228, VDE 0295, class 5 |
| Insulation: | Besilen® EI2 acc. to EN 50363-1 + VDE 0207-363-1 |
| Color code: | colored acc. to HD 308, see below from 6 conductors black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334, from 3 conductors a green-yellow earth wire |
| Wrapping: | conductors together with mica tape |
| Braiding: | conductors together with glass fiber |
| Stranding: | in layers |
| Braiding: | glass fiber |
| Wrapping: | mica tape |
| Braiding: | glass fiber |
| Inner jacket: | Besilen® EI2 acc. to EN 50363-1 + VDE 0207-363-1 |
| Jacket color: | reddish brown (similar RAL 3016) |
| Shielding: | tinned copper braiding |

Technical data:

| | |
|---------------------------------------|--|
| Nominal voltage: | U ₀ /U 300/500 V |
| Testing voltage: | conductor/conductor: 2000 V conductor/shielding: 2000 V |
| Min. bending radius: | 15 x O.D. |
| Radiation resistance: | 2 x 10 ⁷ cJ/kg |
| Temperature range | |
| <i>static:</i> | -40/+180°C |
| <i>flexible:</i> | -25/+180°C |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2 |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 |

Outstanding features:



- halogen-free
- flexible at low temperatures
- heat resistant
- good EMC characteristic

HD 308 color code:

- 2c: blue - brown
- 3c: green/yellow - blue - brown
- 4c: green/yellow - brown - black - gray
- 5c: green/yellow - blue - brown - black - gray

| item no. | no. of conductors incl. ground | outer-ø inch | mm | cable weight ≈lbs/mft |
|--|--------------------------------------|-----------------|------|-----------------------------|
| ▶ 18 AWG (≈ 30/32) ▪ 1.00 mm² | | | | |
| 7479011 | 4 | 0.520 | 13.2 | 171 |
| 7479017 | 5 | 0.579 | 14.7 | 191 |
| 7479018 | 8 | 0.669 | 17.0 | 277 |
| ▶ 16 AWG (≈ 27-29/30) ▪ 1.50 mm² | | | | |
| 7479002 | 3 | 0.512 | 13.0 | 163 |
| 7479012 | 4 | 0.567 | 14.4 | 191 |
| 7479010 | 5 | 0.622 | 15.8 | 226 |
| 7479005 | 8 | 0.772 | 19.6 | 366 |
| 7479006 | 12 | 0.858 | 21.8 | 437 |
| 7479008 | 24 | 1.181 | 30.0 | 804 |
| 7479016 | 25 | 1.181 | 30.0 | 760 |
| ▶ 14 AWG ▪ 2.50 mm² | | | | |
| 7479003 | 3 | 0.579 | 14.7 | 203 |
| 7479004 | 4 | 0.622 | 15.8 | 245 |
| 7479015 | 5 | 0.677 | 17.2 | 290 |
| ▶ 12 AWG ▪ 4.00 mm² | | | | |
| 7479007 | 4 | 0.681 | 17.3 | 298 |
| ▶ 10 AWG ▪ 6.00 mm² | | | | |
| 7479014 | 4 | 0.594 | 15.1 | 247 |

Other dimensions and colors are possible on request.

Special Cables

Smeltery Cable

Besilen® (silicone) insulated connection cable with glass fiber braiding and overall copper shielding

+180°C



Application: Connecting cable in steel processing industry.

Construction:

| | |
|--------------------|--|
| Conductor: | tinned copper strands acc. to IEC 60228, VDE 0295, class 5 |
| Insulation: | Besilen® EI2 acc. to EN 50363-1 + VDE 0207-363-1 |
| Color code: | colored acc. to HD 308, see below from 6 conductors black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334, from 3 conductors a green-yellow earth wire |
| Wrapping: | conductors together with mica tape |
| Braiding: | glass fiber |
| Stranding: | in layers |
| Braiding: | glass fiber |
| Wrapping: | mica tape |
| Braiding: | glass fiber |
| Shielding: | tinned copper braiding |

Technical data:

| | |
|---------------------------------------|--|
| Nominal voltage: | Uo/U 300/500 V |
| Testing voltage: | conductor/conductor: 2000 V conductor/shielding: 2000 V |
| Min. bending radius: | 15 x O.D. |
| Radiation resistance: | 2 x 10 ⁷ cJ/kg |
| Temperature range | |
| <i>static:</i> | -40/+180°C |
| <i>flexible:</i> | -25/+180°C |
| Burning characteristics: | flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2 |
| Absence of harmful substances: | acc. to RoHS directive of the European Union see page O/30 |

Outstanding features:

- halogen-free
- flexible at low temperatures
- heat resistant
- good EMC characteristic

| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|---------------------------------------|-----------------------------------|---------|------|--------------------------|
| | | inch | mm | |
| ▶ 18 AWG ▪ 1.00 mm² | | | | |
| 7470210 | 2 | 0.362 | 9.2 | 73 |
| 7470310 | 3 | 0.382 | 9.7 | 97 |
| 7470410 | 4 | 0.417 | 10.6 | 116 |
| 7470510 | 5 | 0.461 | 11.7 | 141 |
| 7470710 | 7 | 0.500 | 12.7 | 172 |
| 7470810 | 8 | 0.583 | 14.8 | 225 |
| 7471210 | 12 | 0.657 | 16.7 | 264 |
| ▶ 16 AWG ▪ 1.50 mm² | | | | |
| 7470315 | 3 | 0.425 | 10.8 | 116 |
| 7470415 | 4 | 0.465 | 11.8 | 140 |
| 7470515 | 5 | 0.512 | 13.0 | 176 |
| 7470815 | 8 | 0.654 | 16.6 | 279 |
| 7471215 | 12 | 0.740 | 18.8 | 335 |
| 7471915 | 19 | 0.874 | 22.2 | 476 |
| 7472415 | 24 | 1.031 | 26.2 | 594 |

| item no. | no. of conductors incl. ground | outer-ø | | cable weight ≈lbs/mft |
|---------------------------------------|-----------------------------------|---------|------|--------------------------|
| | | inch | mm | |
| ▶ 14 AWG ▪ 2.50 mm² | | | | |
| 7470325 | 3 | 0.476 | 12.1 | 143 |
| 7470425 | 4 | 0.520 | 13.2 | 179 |
| 7470525 | 5 | 0.575 | 14.6 | 216 |
| ▶ 12 AWG ▪ 4.00 mm² | | | | |
| 7470440 | 4 | 0.579 | 14.7 | 235 |
| ▶ 8 AWG ▪ 10 mm² | | | | |
| 7470461 | 4 | 0.776 | 19.7 | 462 |
| ▶ 6 AWG ▪ 16 mm² | | | | |
| 7470462 | 4 | 0.894 | 22.7 | 641 |
| ▶ 4 AWG ▪ 25 mm² | | | | |
| 7470463 | 4 | 1.071 | 27.2 | 895 |
| ▶ 2 AWG ▪ 35 mm² | | | | |
| 7470464 | 4 | 1.201 | 30.5 | 1219 |

HD 308 color code:


2c: blue - brown; 3c: green/yellow - blue - brown; 4c: green/yellow - brown - black - gray; 5c: green/yellow - blue - brown - black - gray

Temperature Measurement

In Universal Use

Mineral insulated thermocouple with plug / plunge-in mineral insulated thermocouple with plug

■ mineral insulated thermocouple with plug

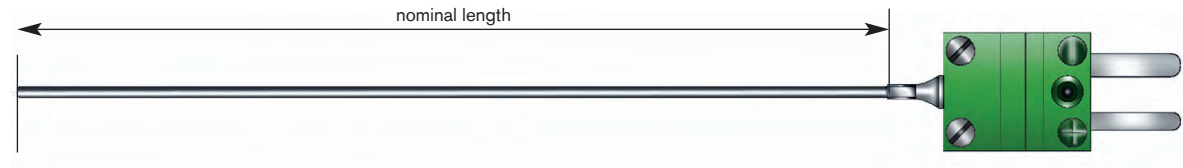

SAB Heat 50W/m

■ This temperature probe is versatile due to its design and high temperature resistance. With its slim design and flexible jacket material, the probe can even be installed in hardly reachable positions. Easy installation is ensured in conjunction with a clamping screw connection.

■ plunge-in mineral insulated thermocouple with plug



■ Especially appropriate to collect temperatures in test vehicles in the vehicle interior. By slight pressure, the plunge-in thermocouple can be placed in the seats or neck-rests to collect the temperature.

Thermocouple:

- 1 x type J
- 1 x type K
- 2 x type J } from Ø 1.5 mm
- 2 x type K }
- other thermocouples _____

Jacket-Ø:

- 0.25 mm
- 0.50 mm
- 0.64 mm
- 0.75 mm
- 1.00 mm
- 1.50 mm
- 2.00 mm
- 3.00 mm
- 4.50 mm
- 6.00 mm
- other jacket-Ø _____

Jacket material:

- 1.4541 (+800°C)
- 2.4816 (+1100°C)
- other jacket materials _____

Connection ends:

- miniature thermoplug miniature socket
- standard plug standard socket
- free ends _____ mm
- other connection ends

Type of measuring tip:

- class 1, form A, insulated measuring tip
- class 1, form B, welded measuring tip

Nominal length: _____ mm

- with batch certificate and identification
- Dakks calibration on request
- accessories (fix): _____

CONFIGURATION EXAMPLES

| item no. | type | Ø mm | nominal length mm | material | connection ends | feature |
|--------------|------|------|-------------------|----------|----------------------|-------------|
| T302-051-218 | K | 0.50 | 100 | 2.4816 | miniature thermoplug | without tip |
| T302-046-275 | K | 1.00 | 100 | 2.4816 | miniature thermoplug | without tip |
| T302-043-185 | K | 1.50 | 100 | 1.4541 | miniature thermoplug | with tip |

Temperature Measurement

In Universal Use

Mineral insulated resistance thermometer with Lemo connection end



■ This temperature probe is versatile due to its design and high temperature resistance. With its slim design and flexible jacket material, the probe can even be installed in hard to reach positions. Easy installation is ensured in conjunction with a clamping screw connection.

RTD:

- 1 x PT100 class B
- 1 x PT100 class A
- 2 x PT100 class B
- 2 x PT100 class A

Connection types of inner wire:

- 2-wire circuit
- 3-wire circuit
- 4-wire circuit

Jacket-Ø:

- 1.5 mm 3.0 mm 4.5 mm
- other jacket-Ø _____

Connection element:

- socket size 0 plug size 0
- socket size 1 plug size 1
- socket size 2 plug size 2
- other connection elements _____

Accessories (fix):

- without socket/plug housing
- with socket/plug housing
- other accessories _____

Measuring ranges:

- 50 up to +400°
- 50 up to +600°
- other measuring ranges

Nominal length: _____ mm

- with batch certificate and identification
- Dakks calibration on request
- accessories (fix): _____

| | |
|--------------------|---|
| RTD: | PT100 acc. to DIN EN 60751 |
| jacket material: | mat. no. 1.4541 |
| measuring range: | -50 up to +400°C and -50 up to +600°C |
| plug/ socket size: | size 0 with jacket-Ø 1.5 mm size 1 with jacket-Ø 1.5 mm – 4.5 mm size 2 with jacket-Ø 6.00 mm |


CONFIGURATION EXAMPLES

| item no. | RTD | Ø mm | nominal length mm | connection types | connection ends |
|--------------|-------------------|------|-------------------|------------------|--------------------------|
| T603-046-327 | 1 x PT100 class A | 1.5 | 100 | 4-wire circuit | Lemo plug size 0, 4 pole |
| T603-040-028 | 1 x PT100 class A | 3.0 | 100 | 4-wire circuit | Lemo plug size 1, 4 pole |

Temperature Measurement

In Universal Use

Mineral insulated thermocouple with cable

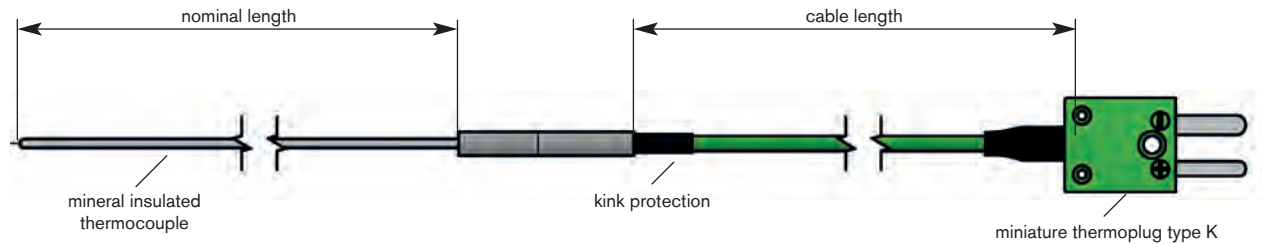

■ This temperature probe is versatile due to its design and high temperature resistance. With its slim design and flexible jacket material, the probe can even be installed in hard to reach positions. Easy installation is ensured in conjunction with a clamping screw connection.

Thermocouple:

- 1 x type J
- 1 x type K
- 2 x type J } from Ø 1.5 mm
- 2 x type K }
- other thermocouples _____

Jacket-Ø:

- 0.25 mm
- 0.50 mm
- 1.00 mm
- 1.50 mm
- 2.00 mm
- 3.00 mm
- 4.50 mm
- 6.00 mm
- other jacket-Ø _____

Jacket material:

- 1.4541 (+800°C)
- 2.4816 (+1100°C)
- other jacket materials _____

Type of measuring tip:

- class 1, form A, insulated measuring tip
- class 1, form B, welded measuring tip

Nominal length: _____ mm

- with batch certificate and identification
- Dakks calibration on request
- accessories (fix): _____

Type:

- with kink protection
- without kink protection

Connection cable:

- Thermocouple extension cable 2 x 0.22 mm² (FEP / C / FEP)
- Thermocouple extension cable 2 x 0.22 mm² (FEP / FEP)
- other connection cables (see page 39)

Connection cable length:

- 0.50 m
- 1.00 m
- 1.50 m
- 2.00 m
- 3.00 m
- 5.00 m
- 10.0 m
- other length _____ m

Connection ends:

- miniature thermoplug miniature socket
- standard plug standard socket
- free ends _____ mm
- other connection ends


CONFIGURATION EXAMPLES

| item no. | type | Ø mm | nominal length mm | material | cable | cable length mm | connection ends |
|--------------|------|------------------------------|-------------------|----------|------------------------------------|-----------------|--------------------------|
| T207-058-738 | K | 0.25 | 100 | 1.4541 | 2 x 0.22 mm ² FEP/C/FEP | 1000 | miniature thermoplug |
| T207-058-674 | K | 0.50 | 300 | 1.4541 | 2 x 0.22 mm ² FEP/C/FEP | 3000 | miniature thermoplug |
| T207-053-625 | K | 0.50 | 150 | 2.4816 | 2 x 0.22 mm ² FEP/C/FEP | 1000 | miniature thermoplug |
| T207-059-165 | K | 0.64 | 200 | 2.4816 | 2 x 0.22 mm ² FEP/C/FEP | 3000 | miniature thermoplug |
| T207-035-153 | K | 1.00 | 100 | 2.4816 | 2 x 0.22 mm ² FEP/C/FEP | 2000 | miniature thermoplug |
| T207-055-557 | K | 1.00 | 500 | 2.4816 | 2 x 0.22 mm ² FEP/C/FEP | 1000 | miniature thermoplug |
| T207-058-740 | K | 1.50 (double wall thickness) | 150 | 2.4816 | 2 x 0.22 mm ² FEP/C/FEP | 3000 | Lemo plug size 0, 2 pole |
| T207-037-493 | K | 1.50 | 150 | 2.4816 | 2 x 0.22 mm ² FEP/C/FEP | 1000 | miniature thermoplug |
| T207-056-787 | K | 3.00 | 150 | 2.4816 | 2 x 0.22 mm ² FEP/C/FEP | 2000 | miniature thermoplug |
| T207-056-830 | K | 3.00 (double wall thickness) | 150 | 2.4816 | 2 x 0.22 mm ² FEP/C/FEP | 250 | miniature thermoplug |

Temperature Measurement

In Universal Use

Beat in mineral insulated thermocouple with cable

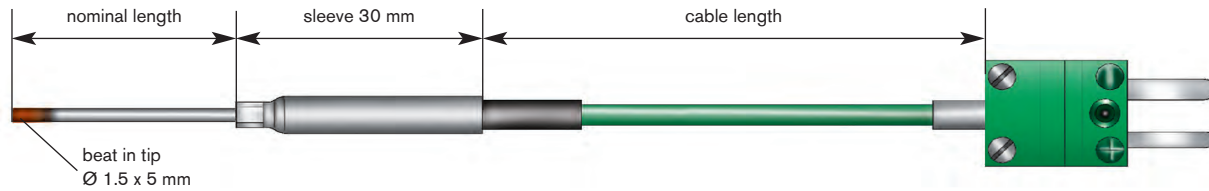

■ This item is used, for example in automobile industry and is particularly appropriate for surface temperature measurement. With the help of an appropriate groove, the element can be fixed by tapping into place. The measuring point is situated behind the copper tip and can easily be identified by the color difference.

Thermocouple:

- 1 x type J
- 1 x type K
- other thermocouples _____

Nominal length: _____ mm

Type:

- with kink protection (shrinkable sleeve)
- without kink protection (shrinkable sleeve)

Connection cable:

- Thermocouple extension cable
2 x 0.22 mm² (FEP / C / FEP)
- Thermocouple extension cable
2 x 0.22 mm² (FEP / FEP)
- other connection cables (see page 38)

Connection cable length:

- 0.50 m
- 1.00 m
- 1.50 m
- 2.00 m
- 3.00 m
- 5.00 m
- 10.00 m
- other length _____ m

Connection ends:

- miniature thermoplug miniature socket
- standard plug standard socket
- free ends _____ mm
- other connection ends

- with batch certificate and identification

general information


| | |
|-----------------|-----------------|
| type J | class 1 |
| | -40°C / +750°C |
| type K | class 1 |
| | -40°C / +1000°C |
| limit deviation | class 1 |
| material | 1.4541 |
| | +800°C |
| material | 2.4816 |
| | +1100°C |

Please note:
the temperature stability of the sensor is determined by the weakest parameters

Temperature Measurement

In Universal Use

Mineral insulated thermocouple with cable

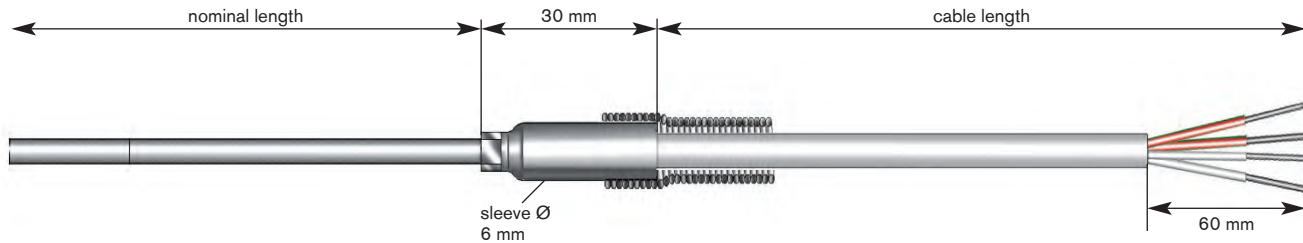

■ This temperature probe is versatile due to its design and high temperature resistance. With its slim design and flexible jacket material, the probe can even be installed in hard to reach positions. Easy installation is ensured in conjunction with a clamping screw connection.

general information

With a 2-wire circuit only one class accuracy class B accuracy can be confirmed.

material 1.4541: +800°C

Please note:
that the temperature stability of the sensor is determined by the weakest parameters.

RTD:

- 1 x PT100
- 2 x PT100

Limiting deviation:

- class A -30°C/+300°C -100°C/+450°C
- class B -50°C/+500°C -196°C/+600°C

Connection types of inner wire:

- 2-wire circuit
- 3-wire circuit
- 4-wire circuit

Jacket-Ø:

- 1.5 mm 3.0 mm 4.5 mm
- other jacket-Ø _____

Nominal length: _____ mm



available on request:
▶ class AA
▶ class DIN 1/10

Type:

- with kink protection
- without kink protection

Connection cable:

- RTD cable (FEP / FEP)
- other connection cables (see page 40)

Connection cable length:


- 0.50 m 1.00 m
- 1.50 m 2.00 m
- 3.00 m 5.00 m
- 10.0 m other length _____ m

Connection ends:

- bare ends
- end sleeves
- cable lugs M4
- tinned
- other cable ends _____
- with batch certificate and identification
- Dakks calibration on request
- accessories (fix): _____

CONFIGURATION EXAMPLES

| item no. | RTD | Ø mm | nominal length mm | connection types | cable | cable length mm | connection ends |
|--------------|-----------|------|-------------------|------------------|---------|-----------------|-----------------|
| T507-059-257 | 1 x PT100 | 1.5 | 100 | 4-wire circuit | FEP/FEP | 1000 | Lemo FGA.0B.306 |
| T505-053-490 | 1 x PT100 | 1.5 | 100 | 4-wire circuit | FEP/FEP | 1000 | bare ends |

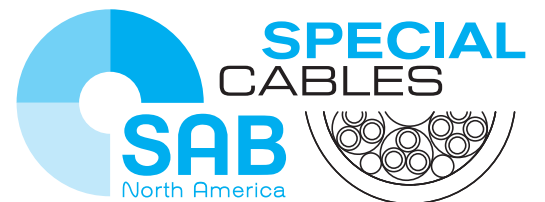

344 Kaplan Drive
Fairfield, NJ 07004
Toll Free: 866-722-2974
www.sabcable.com
info@sabcable.com