

CABLE & ACCESSORIES FOR GREENHOUSES



www.sabcable.com
866-722-2974 ■ info@sabcable.com

SPECIAL
CABLES
SAB
North America



SAB North America

About Us



SAB North America is a focused supplier for the automation, aerospace, medical, high temperature, and robotics industries, providing cable and thermocouple solutions that meet, exceed, and set new standards in the flexible cable market. In addition to flexible cable products, we offer an extensive inventory of high-quality cable accessories, including cord grips, grounding glands and other accessories that complement our flexible control and automation cables.

Whatever the need may be, look to SAB North America for Special Cables that can, for example, help minimize maintenance costs and increase productivity, reduce downtime, and solve specific problems. Here is a small sample of some of the challenges that Special Cables from SAB North America can help address:

- Hybrid designs for multiple functions
- Harsh environments
- Difficult applications
- Industry-specific requirements



SAB North America provides a variation of cables, cord grips and vent accessories that are ideal for greenhouses. All our cables resist humidity, are very flexible and have excellent chemical resistance. SAB cables will perform in most applications within the greenhouse; tray rated cables for lighting and other functions, VFD for HVAC, continuous flex & flexible cable for automated watering, harvesting, sorting and packaging equipment, Ethernet for process control and servo for precise positioning to name a few. Our cord grips will create a tight seal with the cable protecting the connections inside control cabinets (IP 68). SAB also supplies vent glands and plugs to maintain equal pressure inside control cabinets to prevent condensation.

SAB's level of speed and service as a supplier is unmatched. SAB lives up to its name in not only flexible cable but also flexible manufacturing.



SAB Advantage...We make it Easy

- Engineering & technical assistance
- Cut to length with no cut charges
- Prepaid freight within US for orders over \$2,500
- Specialty cable designs (1500 ft minimum)

- No minimum on orders from stock
- Free drop shipments (no surcharges)
- 24-hour shipments from stock
- Cord Grips for securing and grounding cables

Cables & Accessories for Greenhouses

	page
Applications	5
SABTray	
■ DC 105	 300 V, semi-rigid PVC unshielded data cable Type PLTC, ITC, and CMG 6
■ DC 105 C	 300V, shielded semi-rigid PVC data cable Type PLTC, ITC, and CMG 7
■ DC 105 C TP	 300V, shielded, semi-rigid, twisted pair, PVC data cable Type PLTC, ITC, and CMG 8
■ TR 600 S	 600V, UV and oil resistant 90°C flexible tray cable Type TC -ER, MTW, WTT, and CSA approved 9
■ TR 600 S CY	 600V, UV and oil resistant 90°C shielded flexible tray cable Type TC -ER, MTW, WTT, and CSA approved 10
SABControl	
■ CC 600	 600V, oil resistant 90°C flexible unshielded PVC control cable with black conductors 11
■ CC 600 CY	 600V, oil resistant 90°C flexible shielded PVC control cable 12
SABVFD	
■ VFD XLPE TR	 1000V, variable frequency drive - double shielded VFD cable with XLPE insulation Type TC -ER, Oil Res I & II 13
■ VFD Combo XLPE	 1000V, variable frequency drive - double shielded VFD cable with XLPE insulation and one or two pairs, Type TC-ER, Oil Res I & II 14
■ VFD Symmetrical XLPE TR	 1000V, variable frequency drive - double shielded VFD cable with XLPE insulation and 3 symmetrical grounds, Type TC-ER, Oil Res I & II 15
SABTray	
■ TR 600 Auto HD	 600V, continuous flex heavy duty TPE tray cable, Type TC -ER 16
■ TR 600 Auto C HD	 600V, shielded continuous flex heavy duty TPE tray cable, Type TC -ER 17
SABFlex	
■ S 900	 300V, oil resistant single conductor PVC power supply cable 18
■ SD 960	 300V, PVC data cable for small bending radius 19
■ S 960	 600V, PVC control cable for small bending radius 20
■ SD 960 CY	 300V, shielded PVC data cable for small bending radius 21
■ S 960 CY	 600V, shielded PVC control cable for small bending radius 22
■ SD 960 CY TP	 300V, twisted pairs shielded PVC data cable for small bending radius 23
■ SD 200	 300V, halogen-free polyurethane data cable with extreme temperature range 24
■ S 200	 500V, halogen-free polyurethane control cable with extreme temperature range 25
■ SD 200 C	 300V, halogen-free polyurethane shielded data cable with extreme temperature range 27
■ S 200 C	 500V, halogen-free polyurethane shielded control cable with extreme temperature range 28
■ SD 200 C TP	 300V, halogen-free twisted pairs shielded polyurethane data cable with extreme temperature range 30
■ SD 980 P	 300V, high speed heavy duty halogen-free polyurethane data cable 31
■ S 980 P	 600V, high speed heavy duty halogen-free polyurethane control cable 32
■ SD 980 CP	 300V, high speed flex heavy duty shielded halogen-free polyurethane data cable 33
■ S 980 CP	 600V, high speed heavy duty shielded halogen-free polyurethane control cable 34
■ SD 980 CP TP	 300V, high speed twisted pairs heavy duty shielded halogen-free polyurethane data cable 35

Cables & Accessories for Greenhouses

page



- PN 675
- S PN 676
- CATLine CAT 6 S
- CATLine CAT 6A S
- CATLine CAT 6A RT
- CATLine CAT 7A S
- CATLine CAT 7A RT
- CATLine CAT 5e DR
- CATLine CAT 6A DR
- CATLine CAT 7A DR



- SL 834 C
- SL 841 C
- SL 843 C
- SL 839 C

Category/Ethernet Cables with Industrial Grade Jacket

			300V UL AWM multi-conductor cable unshielded, PUR	36
			PUR Ethernet cable type C, continuous flex, CAT 5	36
			CAT 6 Gigabit Ethernet cable, suitable for cable tracks	37
			CAT 6A Gigabit Ethernet cable, suitable for cable tracks	37
			CAT 7A Gigabit Ethernet cable, suitable for robots	37
			CAT 7A Gigabit Ethernet cable, suitable for cable tracks	38
			CAT 7A Gigabit Ethernet cable, suitable for robots	38
			CAT 5e, 6A/7A reeling Gigabit Ethernet cable	39
			CAT 5e, 6A/7A reeling Gigabit Ethernet cable	39
			CAT 5e, 6A/7A reeling Gigabit Ethernet cable	39

Servo Cable for Motor, Power, Positioning, Encoder & Feedback

		Continuous flex servo cable for power, PUR	40
		Continuous flex servo cable with power and pair(s), PUR	41
		Continuous flex position/feedback cable, PUR	42
		Continuous flex positon/feedback cable, PUR	43

Polyamide 6 Cord Grips

■ CG 100 Metric					Polyamide cord grip, dome cap with locknut, black or gray, metric thread	44
■ CG 100 PG					Polyamide cord grip, dome cap with locknut, black or gray, PG thread	45
■ CG 100 NPT					Polyamide cord grip, dome cap, black or gray, NPT thread	46

Nickel Plated Brass Cord Grips

■ CG 300 Metric					Nickel plated brass cord grip, standard & longer metric threads	47
■ CG 300 PG					Nickel plated brass cord grip, standard & longer PG thread	48
■ CG 300 NPT					Nickel plated brass cord grip, NPT thread	49

EMC Grounding Glands

■ CG EMC-2 Metric					Nickel plated brass EMC 2 cable gland, standard & longer metric thread	50
■ CG EMC-2 PG					Nickel plated brass EMC 2 cable gland, standard & longer PG thread	51
■ CG EMC-2 NPT					Nickel plated brass EMC 2 cable gland, NPT thread	51
■ CG EMC-4 Metric					Nickel plated brass EMC 4 cable gland, Metric thread	52
■ CG EMC-4 PG					Nickel plated brass EMC 4 cable gland, PG thread	52
■ CG EMC-4 NPT					Nickel plated brass EMC 4 cable gland, NPT thread	52

Accessories

■ Plastic Locknuts	Polyamide hexagonal locknuts, black or gray, metric, PG, & NPT thread					53
■ Metal Locknuts	Nickel plated brass locknuts, metics, PG, & NPT					54
■ EMC Metal Locknuts	Nickel plated brass locknuts with grounding teeth, metics, PG, & NPT					54

Ventilation Glands & Plugs to Keep Enclosures Pressure Balanced

■ VG Vent PA6					Polyamide vent gland, black or gray, metric & PG thread	55
■ VG Vent NPB					Nickel plated brass vent gland,metric & PG thread	55
■ VP Vent PA6					Polyamide vent plug, black or gray, metric thread or quick fit	56
■ VP Vent Metal					Stainless steel vent plug, metric or PG thread	58

Cables & Accessories for Greenhouses

When selecting wire and cable for your indoor growing application, be sure to keep the following factors in mind:

Flexibility:	Cable runs typically have complex configurations since equipment and cable trays must be positioned to avoid blocking sunlight.
Chemical resistance:	Whether for plant growth or pest mitigation, greenhouses are teeming with agricultural chemicals and pesticides.
Moisture/humidity/corrosion resistance:	Humid conditions in greenhouses can lead to condensation forming on equipment or dripping from the ceiling. Puddles can also add to the humidity inside a greenhouse.
UV resistance:	Abundant sunlight can cause cable jacketing to degrade.
Temperature:	Elevated temperatures are common in greenhouses.
Certifications and approvals:	Make sure your wire and cable satisfies industry and local standards.



FILLING & SEEDING LINE



WATER TANKS



ROBOTIC FARMING



LIGHTING



SPRAYING EQUIPMENT



CLIMATE CONTROL

Tray Cables for Greenhouses

DC 105

Semi-rigid PVC data cable
Type PLTC, ITC, and CMG



°C (DC 105) - CSA TYPE CMG or AWM I/II A/B 105°C 300V FT4



Marking for DC 105 DC3332203:

SAB North America P/N DC3332203 22AWG/3c (UL) TYPE PLTC or ITC or CMG 105°C (DC 105) - CSA TYPE CMG or AWM I/II A/B 105°C 300V FT4 RoHS CE

Construction:

Conductor:	tinned copper strands
Insulation:	
26 - 20 AWG:	semi-rigid PVC
18 - 16 AWG:	PVC/nylon
Color code:	
26 - 24 AWG:	color code, chart 2, see below
22 AWG:	color code, chart 4, see below
20 - 16 AWG:	color code chart 6, see below
Stranding:	twisted together in layers with non-wicking fillers
Jacket material:	PVC
Jacket color:	grayish tan (RAL 7032)

Color Code Chart 2:

no.	Conductor color	Conductor no.	Conductor color
1	black	14	green/white
2	white	15	blue/white
3	red	16	black/red
4	green	17	white/red
5	orange	18	orange/red
6	blue	19	blue/red
7	white/black	20	red/green
8	red/black	21	orange/green
9	green/black	22	black/white/red
10	orange/black	23	white/black/red
11	blue/black	24	red/black/white
12	black/white	25	green/black/white
13	red/white		

Color Code Chart 4:

no.	Conductor color	Conductor no.	Conductor color
1	black	14	white/orange
2	brown	15	white/yellow
3	red	16	white/green
4	orange	17	white/blue
5	yellow	18	white/violet
6	green	19	white/gray
7	blue	20	white/black/brown
8	violet	21	white/black/red
9	gray	22	white/black/orange
10	white	23	white/black/yellow
11	white/black	24	white/black/green
12	white/brown	25	white/black/blue
13	white/red		

Color Code Chart 6:

no.	Conductor color	Conductor no.	Conductor color
1	black	14	red/yellow
2	red	15	red/black
3	white	16	white/black
4	green	17	white/red
5	orange	18	white/green
6	blue	19	white/yellow
7	brown	20	white/blue
8	yellow	21	white/brown
9	violet	22	white/orange
10	gray	23	white/gray
11	pink	24	white/violet
12	tan	25	white/black/red
13	red/green		

Technical data:

Nominal voltage:	300 V
Testing voltage:	2000 V
Min. bending radius: <i>fixed installation:</i>	4 x O.D.
Temperature range:	-25/+105°C
Approvals:	UL: CMG (26-16 AWG) PLTC & ITC (22 - 20 AWG) PLTC-ER & ITC-ER (18 - 16 AWG) CSA: CMG/FT4 AWM I/II A/B CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no.	no. of conductors	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
► 26 AWG (7/34)				
DC3222603	3	0.156	4.0	18
DC3222604	4	0.166	4.2	20
DC3222606	6	0.189	4.8	25
DC3222607	7	0.192	4.9	26
DC3222608	8	0.204	5.2	28
DC3222610	10	0.230	5.8	36
DC3222614	14	0.262	6.7	40
DC3222615	15	0.261	6.6	48
DC3222620	20	0.295	7.5	58
DC3222625	25	0.323	8.2	70
► 24 AWG (7/32)				
DC3222402	2	0.160	4.1	20
DC3222403	3	0.167	4.2	23
DC3222404	4	0.182	4.6	24
DC3222405	5	0.191	4.9	27
DC3222406	6	0.204	5.2	30
DC3222407	7	0.207	5.3	31
DC3222408	8	0.220	5.6	35
DC3222410	10	0.249	6.3	43
DC3222412	12	0.256	6.5	49
DC3222415	15	0.283	7.2	59
DC3222418	18	0.303	7.7	65
DC3222420	20	0.311	7.9	70
DC3222425	25	0.343	8.7	86
► 22 AWG (7/30)				
DC3332202	2	0.178	4.5	22
DC3332203	3	0.190	4.8	25
DC3332204	4	0.202	5.1	29
DC3332205	5	0.213	5.4	34
DC3332206	6	0.228	5.8	40
DC3332207	7	0.231	5.9	41
DC3332208	8	0.244	6.2	46
DC3332209	9	0.261	6.6	53
DC3332210	10	0.289	7.3	60
DC3332212	12	0.297	7.5	67
DC3332215	15	0.317	8.1	79
DC3332218	18	0.339	8.6	87
DC3332220	20	0.348	8.8	94
DC3332225	25	0.385	9.8	117
DC3332230	30	0.430	10.9	143
DC3332240	40	0.475	12.1	184
DC3332250	50	0.517	13.1	221

item no.	no. of conductors	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
► 20 AWG (≈ 19/32)				
DC3332002	2	0.196	5.0	29
DC3332003	3	0.205	5.2	35
DC3332004	4	0.220	5.6	42
DC3332006	6	0.254	6.5	55
DC3332007	7	0.254	6.5	52
DC3332008	8	0.275	7.0	62
DC3332009	9	0.303	7.7	74
DC3332010	10	0.325	8.3	80
DC3332012	12	0.335	8.5	92
DC3332015	15	0.358	9.1	110
DC3332020	20	0.415	10.5	143
DC3332025	25	0.459	11.7	184
► 18 AWG (19/30)				
DC3311802	2	0.276	7.0	45
DC3311803	3	0.29	7.4	58
DC3311804	4	0.313	8.0	70
DC3311805	5	0.339	8.6	78
DC3311806	6	0.366	9.3	91
DC3311807	7	0.367	9.3	98
DC3311808	8	0.395	10.0	110
DC3311809	9	0.423	10.7	124
DC3311810	10	0.457	11.6	144
DC3311812	12	0.472	12.0	164
DC3311815	15	0.507	12.9	194
DC3311818	18	0.579	14.7	244
DC3311820	20	0.595	15.1	263
DC3311825	25	0.662	16.8	325
DC3311850	50	0.904	23.0	621
► 16 AWG (26/30)				
DC3311602	2	0.296	7.5	54
DC3311603	3	0.312	7.9	68
DC3311604	4	0.337	8.6	83
DC3311605	5	0.366	9.3	95
DC3311606	6	0.396	10.1	109
DC3311607	7	0.397	10.1	119
DC3311608	8	0.428	10.9	134
DC3311609	9	0.459	11.7	160
DC3311610	10	0.497	12.6	174
DC3311612	12	0.513	13.0	199
DC3311615	15	0.584	14.8	261
DC3311618	18	0.629	16.0	297
DC3311620	20	0.647	16.4	330
DC3311625	25	0.721	18.3	400

Other dimensions and colors are available on request

Tray Cables for Greenhouses

DC 105 C

Shielded semi-rigid PVC data cable

Type PLTC, ITC, and CMG



CMG OR AWM I/II A/B 105°C 300V FT4 RoHS CE



Marking for DC 105 C DC3332204S:

SAB North America P/N DC3332204S 22AWG/4c (UL) TYPE PLTC OR ITC OR CMG SHIELDED 105°C (DC 105 C) CSA TYPE CMG OR AWM I/II A/B 105°C 300V FT4 RoHS CE

Construction:

Conductor:	tinned copper strands
Insulation:	
26 - 20 AWG:	semi-rigid PVC
18 - 16 AWG:	PVC/nylon
Color code:	
26 - 24 AWG:	color code, chart 2, see below
22 AWG:	color code, chart 4, see below
20 - 16 AWG:	color code chart 6, see below
Stranding:	twisted together in layers with non-wicking fillers
Shielding:	double shielding, alu-foil, tinned copper braiding and tinned drain wire
Jacket material:	PVC
Jacket color:	grayish tan (RAL 7032)

Technical data:

Nominal voltage:	300 V
Testing voltage:	2000 V
Min. bending radius: <i>fixed installation:</i>	6 x O.D.
Temperature range:	-25/+105°C
Approvals:	UL: CMG (26 - 16 AWG) PLTC & ITC (22 - 20 AWG) PLTC-ER & ITC-ER (18 - 16 AWG) CSA: CMG/FT4 AWM I/II A/B CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

Color Code Chart 2:

no.	Conductor color	no.	Conductor color
1	black	14	green/white
2	white	15	blue/white
3	red	16	black/red
4	green	17	white/red
5	orange	18	orange/red
6	blue	19	blue/red
7	white/black	20	red/green
8	red/black	21	orange/green
9	green/black	22	black/white/red
10	orange/black	23	white/black/red
11	blue/black	24	red/black/white
12	black/white	25	green/black/white
13	red/white		

item no.	no. of conductors	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
► 26 AWG (7/34)				
DC3222602S	2	0.180	4.6	27
DC3222603S	3	0.186	4.7	30
DC3222604S	4	0.196	5.0	32
DC3222605S	5	0.207	5.3	34
DC3222606S	6	0.219	5.6	37
DC3222607S	7	0.221	5.6	39
DC3222608S	8	0.231	5.9	43
DC3222610S	10	0.258	6.6	51
DC3222615S	15	0.289	7.3	66
DC3222618S	18	0.307	7.8	70
DC3222625S	25	0.343	8.7	88

item no.	no. of conductors	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
► 24 AWG (7/32)				
DC3222403S	3	0.197	5.0	35
DC3222404S	4	0.209	5.3	36
DC3222405S	5	0.221	5.6	39
DC3222406S	6	0.234	5.9	45
DC3222407S	7	0.236	6.0	46
DC3222408S	8	0.248	6.3	51
DC3222409S	9	0.261	6.6	56
DC3222410S	10	0.288	7.3	62
DC3222412S	12	0.288	7.3	67
DC3222415S	15	0.312	7.9	80
DC3222418S	18	0.332	8.4	86
DC3222420S	20	0.340	8.6	92
DC3222425S	25	0.372	9.4	111

item no.	no. of conductors	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
► 22 AWG (7/30)				
DC3332203S	3	0.210	5.3	40
DC3332204S	4	0.224	5.7	43
DC3332205S	5	0.237	6.0	49
DC3332206S	6	0.252	6.4	54
DC3332207S	7	0.260	6.6	57
DC3332208S	8	0.267	6.8	61
DC3332210S	10	0.312	7.9	77
DC3332212S	12	0.320	8.1	86
DC3332215S	15	0.339	8.6	99
DC3332218S	18	0.362	9.2	110
DC3332220S	20	0.371	9.4	118
DC3332225S	25	0.433	11	150

item no.	no. of conductors	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
► 20 AWG (≈ 19/32)				
DC3332003S	3	0.229	5.8	51
DC3332004S	4	0.244	6.2	59
DC3332006S	6	0.289	7.3	73
DC3332008S	8	0.307	7.8	85
DC3332010S	10	0.348	8.8	102
DC3332015S	15	0.380	9.7	135
DC3332020S	20	0.437	11.1	169
DC3332025S	25	0.481	12.2	213

item no.	no. of conductors	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
DC3331803S	3	0.314	8.0	79
DC3331804S	4	0.337	8.6	92
DC3331806S	6	0.390	9.9	116

item no.	no. of conductors	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
DC3331603S	3	0.336	8.5	93
DC3331604S	4	0.361	9.2	111
DC3331606S	6	0.420	10.7	139

Other dimensions and colors are available on request

Color Code Chart 4:

no.	Conductor color	no.	Conductor color
1	black	14	white/orange
2	brown	15	white/yellow
3	red	16	white/green
4	orange	17	white/blue
5	yellow	18	white/violet
6	green	19	white/gray
7	blue	20	white/black/brown
8	purple	21	white/black/red
9	gray	22	white/black/orange
10	white	23	white/black/yellow
11	white/black	24	white/black/green
12	white/brown	25	white/black/blue
13	white/red		

Color Code Chart 6:

no.	Conductor color	no.	Conductor color
1	black	14	red/yellow
2	red	15	red/black
3	white	16	white/black
4	green	17	white/red
5	orange	18	white/green
6	blue	19	white/yellow
7	brown	20	white/blue
8	yellow	21	white/brown
9	violet	22	white/orange
10	gray	23	white/gray
11	pink	24	white/violet
12	tan	25	white/black/red
13	red/green		

Tray Cables for Greenhouses

DC 105 C TP


Shielded, semi-rigid, twisted pair, PVC data cable
Type PLTC, ITC, and CMG



AWM I/II A/B 105°C 300V FT4 RoHS CE

Marking for DC 105 C TP DC3332203TP:

SAB North America P/N DC3332203TP 22AWG/3pr (UL) TYPE PLTC or ITC or CMG SHIELDED 105°C (DC 105 CTP) CSA TYPE CMG or AWM I/II A/B 105°C 300V FT4 RoHS CE

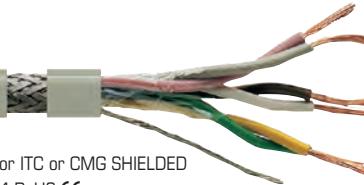

Construction:

Conductor:	tinned copper strands
Insulation:	
24 - 20 AWG:	semi-rigid PVC
18 - 16 AWG:	PVC/nylon
Color code:	color code, chart 3, see below
Stranding:	paired and twisted together in layers with non-wicking fillers
Shielding:	double shielding, alu-foil tinned copper braiding and tinned drain wire
Jacket material:	PVC
Jacket color:	grayish tan (RAL 7032)

Color Code Chart 3:

Pair no.	color combination
1	black paired with red
2	black paired with white
3	black paired with green
4	black paired with blue
5	black paired with yellow
6	black paired with brown
7	black paired with orange
8	red paired with white
9	red paired with green
10	red paired with blue
11	red paired with yellow
12	red paired with brown
13	red paired with orange
14	green paired with white
15	green paired with blue
16	green paired with yellow
17	green paired with brown
18	green paired with orange
19	white paired with blue
20	white paired with yellow
21	white paired with brown
22	white paired with orange
23	blue paired with yellow
24	blue paired with brown
25	blue paired with orange

item no.	no. of pairs	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
► 24 AWG (7/32)				
DC3222401TP*	1	0.190	4.8	31
DC3222402TP	2	0.246	6.2	44
DC3222403TP	3	0.258	6.6	51
DC3222404TP	4	0.292	7.4	57
DC3222405TP	5	0.307	7.8	65
DC3222406TP	6	0.328	8.3	73
DC3222408TP	8	0.351	8.9	85
DC3222409TP	9	0.373	9.5	97
DC3222415TP	15	0.460	11.7	151
► 22 AWG (7/30)				
DC3332201TP*	1	0.203	5.2	32
DC3332202TP	2	0.266	6.8	50
DC3332203TP	3	0.289	7.3	63
DC3332204TP	4	0.323	8.2	71
DC3332205TP	5	0.333	8.5	80
DC3332206TP	6	0.358	9.1	90
DC3332208TP	8	0.383	9.7	107
DC3332209TP	9	0.429	10.9	128
DC3332211TP	11	0.460	11.7	154
DC3332215TP	15	0.505	12.8	188
DC3332225TP	25	0.644	16.4	262

*DC3222401TP & DC3332201TP: black paired with white color code

Technical data:

Nominal voltage:	300 V
Testing voltage:	2000 V
Min. bending radius: <i>fixed installation:</i>	6 x O.D.
Temperature range:	-25/+105°C
Approvals:	UL: CMG (24 - 16 AWG) PLTC & ITC (22 - 20 AWG) PLTC-ER & ITC-ER (18 - 16 AWG) CSA: CMG/FT4 AWM I/II A/B CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no.	no. of pairs	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
► 20 AWG (≈ 19/32)				
DC3332001TP	1	0.220	5.6	42
DC3332002TP	2	0.305	7.7	67
DC3332003TP	3	0.321	8.2	80
DC3332004TP	4	0.345	8.8	95
DC3332006TP	6	0.422	10.7	129
DC3332009TP	9	0.482	12.2	180
DC3332015TP	15	0.572	14.5	254
► 18 AWG (19/30)				
DC3331801TP	1	0.300	7.6	68
DC3331802TP	2	0.415	10.5	106
DC3331803TP	3	0.439	11.2	128
DC3331804TP	4	0.476	12.1	162
DC3331806TP	6	0.595	15.1	231
DC3331809TP	9	0.686	17.4	312
DC3331815TP	15	0.823	20.9	461
► 16 AWG (26/30)				
DC3331601TP	1	0.320	8.1	78
DC3331602TP	2	0.448	11.4	124
DC3331603TP	3	0.474	12.0	162
DC3331604TP	4	0.515	13.1	192

Tray Cables for Greenhouses

TR 600 S

UV and oil resistant 90°C flexible tray cable
Type TC-ER, MTW, WTTC, and CSA approved



Marking for TR 600 S 93331641:

SAB NORTH AMERICA TR 600 S 93331641 16 AWG/41C (UL) TC-ER 90C DRY/WET 600V SUN RES DIR BUR OIL RES I/II OR WTTC 1000V OR MTW "FLEXING" OR DP-1 OR AWM 2586 105°C CSA CIC-TC PVC/N 90°C DRY 75°C WET 600V -25°C SR FT4 OR AWM I/II A/B 90C 1000V FT4 RoHS CE

Construction:

Conductor:	bare copper strands class K (30 AWG multiple strands)
Insulation:	special formulated PVC/Nylon
Color code:	black conductors with consecutive white numbers; green/yellow ground from 3 conductors
Stranding:	in layers
Jacket material:	special oil resistant pressure extruded PVC
Jacket color:	black (RAL 9005)

Outstanding features:

- flexible stranding for easy installation
- oil resistant meeting UL Oil Res I and II
- NFPA 79 for Industrial Machinery
- UL TC-ER (exposed runs)
- CSA approved for TC
- Submersible pump (14 AWG ≥ 3 thru 7 cond.)
- WTTC: Wind Turbine tray cable
- 90°C Wet rated
- Class 1 Div 2 per NEC Article 501.4 (B)

Technical data:

Voltage:	UL-AWM / (UL) / CSA: (UL) WTTC:	600 V 1000 V
Testing voltage:	2500 V	
Min. bending radius:		
<i>fixed installation:</i>	4 x O.D.	
<i>free movement:</i>	6 x O.D.	
Temperature range:	UL-AWM (UL) / CSA:	up to +105°C up to +90°C
<i>static:</i>	-40°C	
Burning characteristics:	(UL) / CSA FT4	
Oil resistance I & II:	yes	
Sunlight resistance:	yes	
Exposed runs:	yes	
Cold bend test:	-40°C	
Direct burial:	yes	
Machinery area:	yes	
Approvals:	UL TC-ER UL MTW, UL WTTC, UR AWM, CSA CIC-TC, CSA AWM, CE, RoHS	
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30	

Item no.	no. of conductors incl. ground	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
► 18 AWG				
93331602*	2	0.286	7.3	45
93331803	3	0.300	7.6	55
93331804	4	0.324	8.2	67
93331805	5	0.349	8.9	79
93331807	7	0.376	9.6	100
93331809	9	0.432	11.0	125
93331812	12	0.480	12.2	157
93331818	18	0.596	15.1	244
93331825	25	0.686	17.4	319
93331850	50	0.940	23.9	622
► 16 AWG				
93331602*	2	0.306	7.8	52
93331603	3	0.321	8.2	70
93331604	4	0.348	8.8	81
93331605	5	0.376	9.6	96
93331607	7	0.412	10.5	126
93331608	8	0.440	11.2	137
93331609	9	0.473	12.0	152
93331612	12	0.527	13.4	196
93331616	16	0.613	15.6	273
93331618	18	0.646	16.4	300
93331619	19	0.646	16.4	310
93331625	25	0.746	18.9	395
93331634	34	0.884	22.5	544
93331637	37	0.896	22.8	592
93331641	41	0.945	24.0	654
93331650	50	1.025	26.0	756

Item no.	no. of conductors incl. ground	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
► 14 AWG				
93331402*	2	0.346	8.8	65
93331403	3	0.364	9.2	88
93331404	4	0.396	10.1	112
93331405	5	0.430	10.9	130
93331407	7	0.472	12.0	169
93331409	9	0.578	14.7	236
93331412	12	0.644	16.4	297
93331418	18	0.744	18.9	417
93331425	25	0.904	23.0	596
► 12 AWG				
93331202*	2	0.385	9.8	99
93331203	3	0.403	10.2	120
93331204	4	0.440	11.2	150
93331205	5	0.479	12.2	189
93331207	7	0.526	13.4	240
► 10 AWG				
93331003	3	0.487	12.4	179
93331004	4	0.568	14.4	248
93331005	5	0.618	15.7	298
93331007	7	0.674	17.1	403
► 8 AWG				
93330803	3	0.662	16.8	309
93330804	4	0.728	18.5	388
93330805	5	0.826	21.0	465
► 6 AWG				
93330603	3	0.765	19.4	443
93330604	4	0.879	22.3	580
93330605	5	0.954	24.2	717

Item no.	no. of conductors incl. ground	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
► 4 AWG				
93330403	3	0.966	24.5	696
93330404	4	1.061	26.9	845
93330405	5	1.179	29.9	1035
► 2 AWG				
93330203	3	1.114	28.3	977
93330204	4	1.160	29.5	1215
93330205	5	1.363	34.6	1575
► 1 AWG				
93330104	4	1.401	35.6	1588
► 1/0 AWG				
93331104	4	1.458	37.0	1971
► 2/0 AWG				
93332104	4	1.588	40.3	2301
► 3/0 AWG				
93333104	4	1.733	44.0	2946
► 4/0 AWG				
93334104	4	1.841	46.8	3459
► 250 MCM				
93332504	4	2.138	54.3	4538
► 350 MCM				
93333504	4	2.335	59.3	5591
► 500 MCM				
93335004	4	2.815	71.5	8065

Other dimensions and colors are available on request

* 2 conductor cables are rated UL TC only

UL TC-ER-JP (joist pull) available upon request

Tray Cables for Greenhouses

TR 600 S CY

UV and oil resistant 90°C shielded flexible tray cable
Type TC-ER, MTW, WTTC, and CSA approved



Marking for TR 600 S CY 93341604:

SAB NORTH AMERICA TR 600 S CY 93341604 16 AWG / 4C (UL) TC-ER 90C DRY/WET 600V SUN RES DIR BUR OIL RES I/II OR WTTC 1000V OR MTW "FLEXING" OR DP-1 OR AWM 2586 105°C CSA CIC-TC PVC/N 90°C DRY 75°C WET 600V -25°C SR FT4 OR AWM I/II A/B 90C 1000V FT4 RoHS CE

Construction:

Conductor:	bare copper strands class K (30 AWG multiple strands)
Insulation:	special formulated PVC/Nylon
Color code:	black conductors with consecutive white numbers; green/yellow ground from 3 conductors
Stranding:	in layers
Wrapping:	fleece tape
Shielding:	tinned copper braiding (85% coverage)
Jacket material:	special oil resistant pressure extruded PVC
Jacket color:	black (RAL 9005)

Outstanding features:

- flexible stranding for easy installation
- oil resistant meeting UL Oil Res I and II
- NFPA 79 for Industrial Machinery
- ULTC-ER (exposed run)
- CSA approved for TC
- Submersible pump (14 AWG ≥ 3 thru 7 cond.)
- WTTC: Wind Turbine tray cable
- 90°C Wet rated
- Class 1 Div 2 per NEC Article 501.4 (B)

Technical data:

Voltage:	UL-AWM / (UL) / CSA: 600 V (UL) WTTC: 1000 V
Testing voltage:	2500 V
Min. bending radius: <i>fixed installation:</i> <i>free movement:</i>	6 x O.D. 8 x O.D.
Temperature range: <i>static:</i>	UL-AWM up to +105°C -40°C (UL) / CSA: up to +90°C
Burning characteristics:	(UL) / CSA FT4
Oil resistance I & II:	yes
Sunlight resistance:	yes
Exposed runs:	yes
Cold bend test:	-40°C
Direct burial:	yes
Machinery area:	yes
Approvals:	UL TC-ER, UL MTW, UL WTTC, UR AWM, CSA CIC-TC, CSA AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no.	no. of conductors incl. ground	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
► 18 AWG				
93341803	3	0.324	8.2	71
93341804	4	0.348	8.8	85
93341805	5	0.373	9.5	95
93341807	7	0.400	10.2	120
93341809	9	0.455	11.6	149
93341812	12	0.504	12.8	185
93341818	18	0.617	15.7	270
93341825	25	0.710	18.0	365
► 16 AWG				
93341603	3	0.345	8.8	83
93341604	4	0.372	9.4	100
93341605	5	0.400	10.2	116
93341607	7	0.430	10.9	145
93341609	9	0.492	12.5	187
93341612	12	0.579	14.7	245
93341618	18	0.664	16.9	335
93341625	25	0.770	19.6	445

item no.	no. of conductors incl. ground	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
► 14 AWG				
93341403	3	0.388	9.9	108
93341404	4	0.420	10.7	131
93341405	5	0.454	11.5	155
93341407	7	0.490	12.4	190
93341412	12	0.662	16.8	350
93341418	18	0.764	19.4	482
93341425	25	0.924	23.5	701
► 12 AWG				
93341203	3	0.427	10.8	145
93341204	4	0.464	11.8	178
93341205	5	0.506	12.9	210
93341207	7	0.578	14.7	307
► 10 AWG				
93341003	3	0.562	14.3	190
93341004	4	0.568	14.4	250
93341005	5	0.643	16.3	350
93341007	7	0.695	17.7	408

item no.	no. of conductors incl. ground	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
► 8 AWG	4	0.759	19.3	447
► 6 AWG	4	0.915	23.2	672
93340605	5	0.936	23.8	766
► 4 AWG	4	1.097	27.9	993
► 2 AWG	4	1.271	32.3	1455

Other dimensions and colors are available on request

UL TC-ER-JP (joist pull) available upon request

Control & Power Cables for Greenhouses

CC 600

Oil Resistant 90°C flexible control cable with black conductors



0°C Oil 60°C 600V CSA AWM I/II A/B 90°C F 600V FT1 FT2 CE

Marking for CC 600 2041604:

SAB BRÖCKSKES · D-VIERNSEN · <VDE-REG 7000> 4x1.5mm² CC 600 16 AWG/4c 2041604 AWM Style 21216 90°C Oil 60°C 600V CSA AWM I/II A/B 90°C F 600V FT1 FT2 CE



Construction:

Conductor:	bare copper strands acc. to IEC 60228, VDE 0295, class 5
Insulation:	special PVC acc. to VDE and UL/CSA
Color code:	black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334, green/yellow ground from 3 conductors
Stranding:	in layers
Jacket material:	special oil resistant PVC acc. to VDE and UL/CSA
Jacket color:	gray (RAL 7000)

Outstanding features:

- UL recognized, CSA approved
- high mechanical loading capacity
- oil resistant
- acc. to VDE-Reg. no. 7000

Technical data:

Nominal voltage:	Uo/U 300/500 V
Voltage UL/CSA:	600 V
Testing voltage:	conductor/conductor: 3000 V
Min. bending radius:	
fixed installation:	4 x O.D.
free movement:	6 x O.D.
Radiation resistance:	8 x 10 ⁷ cJ/kg
Temperature range:	DIN VDE
static:	-40/+70°C
flexible:	+5/+70°C
Burning characteristics:	flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, UL VW-1, CSA FT1, FT2
Oil resistance:	very good - TM5 acc. to EN 50363-4-1 + VDE 0207-363-4-1, Oil 60°C acc. to UL 758, Fuel Oil acc. to CSA-C 22.2 No. 210
Chemical resistance:	see page O/11
Approvals:	UR AWM, CSA AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

Item no. no. of conductors incl. ground outer-Ø ±10% inch cable weight ≈lbs/mft

► 20 AWG (≈ 16/32) • 0.50 mm ²				
2042002	2	0.209	5.3	28
2042003	3	0.220	5.6	32
2042004	4	0.236	6.0	38
2042005	5	0.264	6.7	47
2042007	7	0.283	7.2	58
2042008	8	0.335	8.5	73
2042009	9	0.362	9.2	84
2042010	10	0.370	9.4	85
2042012	12	0.382	9.7	96
2042014	14	0.398	10.1	108
2042016	16	0.429	10.9	125
2042018	18	0.449	11.4	138
2042025	25	0.547	13.9	189
2042034	34	0.614	15.6	249
2042041	41	0.665	16.9	287
2042061	61	0.780	19.8	422

► 18 AWG (≈ 30/32) • 1.00 mm ²				
2041802	2	0.236	6.0	37
2041803	3	0.252	6.4	46
2041804	4	0.276	7.0	55
2041805	5	0.307	7.8	69
2041807	7	0.335	8.5	86
2041809	9	0.425	10.8	122
2041810	10	0.433	11.0	125
2041812	12	0.445	11.3	142
2041814	14	0.476	12.1	165
2041815	15	0.500	12.7	180
2041818	18	0.535	13.6	209
2041825	25	0.646	16.4	285
2041834	34	0.728	18.5	376
2041841	41	0.783	19.9	434
2041850	50	0.882	22.4	533
2041861	61	0.933	23.7	649

item no. no. of conductors incl. ground outer-Ø ±10% inch cable weight ≈lbs/mft

► 16 AWG (≈ 27-29/30) • 1.50 mm ²				
2041602	2	0.264	6.7	48
2041603	3	0.280	7.1	58
2041604	4	0.311	7.9	73
2041605	5	0.339	8.6	88
2041607	7	0.378	9.6	115
2041608	8	0.441	11.2	140
2041609	9	0.480	12.2	162
2041610	10	0.488	12.4	165
2041612	12	0.504	12.8	189
2041615	15	0.563	14.3	229
2041618	18	0.602	15.3	277
2041625	25	0.728	18.5	382
2041630	30	0.760	19.3	448
2041634	34	0.827	21.0	511
2041641	41	0.902	22.9	597
2041650	50	0.980	24.9	714
2041661	61	1.051	26.7	880

► 14 AWG (≈ 46/30) • 2.50 mm ²				
2041402	2	0.319	8.1	73
2041403	3	0.339	8.6	89
2041404	4	0.374	9.5	112
2041405	5	0.417	10.6	140
2041407	7	0.457	11.6	177
2041409	9	0.587	14.9	267
2041412	12	0.618	15.7	296
2041418	18	0.736	18.7	432
2041425	25	0.909	23.1	607

item no. no. of conductors incl. ground outer-Ø ±10% inch cable weight ≈lbs/mft

► 12 AWG (≈ 52/28) • 4.00 mm ²				
2041203	3	0.402	10.2	132
2041204	4	0.445	11.3	165
2041205	5	0.496	12.6	204
2041207	7	0.547	13.9	267
2041212	12	0.740	18.8	447

► 10 AWG (≈ 78/28) • 6.00 mm ²				
2041003	3	0.476	12.1	191
2041004	4	0.520	13.2	236
2041005	5	0.587	14.9	296
2041007	7	0.669	17.0	403

► 8 AWG (≈ 69/26) • 10.00 mm ²				
2040803	3	0.618	15.7	333
2040804	4	0.689	17.5	411
2040805	5	0.768	19.5	503

► 6 AWG (≈ 110/26) • 25.00 mm ²				
2040604	4	0.839	21.3	632
2040605	5	0.945	24.0	799

► 4 AWG (≈ 175/26) • 50.00 mm ²				
2040404	4	1.043	26.5	985

► 2 AWG (≈ 272/26) • 100.00 mm ²				
2040204	4	1.197	30.4	1349

► 1 AWG (≈ 342/26) • 200.00 mm ²				
2040104	4	1.374	34.9	1902

Other dimensions and colors are available on request



also available with blue, red or
orange conductors and black
or orange jacket

Control & Power Cables for Greenhouses

CC 600 CY

Oil Resistant 90°C flexible shielded control cable



600V Oil 60°C CSA AWM I/II A/B 90°C F 600V FT1 FT2 CE

Marking for CC 600 CY 2591804:

SAB BRÖCKSKES · D-VIERSEN · <VDE-REG 7000> 4x1.0mm² CC 600 CY 18 AWG/4c 2591804 AWM Style 21216 90°C 600V Oil 60°C CSA AWM I/II A/B 90°C F 600V FT1 FT2 CE



Construction:

Conductor:	bare copper strands
AWG 20 - 10:	acc. to IEC 60228, VDE 0295, class 5
AWG 8 - 1:	bare copper strands acc. to UL/CSA
Insulation:	special PVC acc. to VDE and UL/CSA
Color code:	black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334, green/yellow ground from 3 conductors
Stranding:	in layers
Inner Jacket:	special PVC acc. to VDE and UL/CSA
Shielding:	tinned copper braiding
Jacket material:	special oil resistant PVC acc. to VDE and UL/CSA
Jacket color:	gray (RAL 7000)

Outstanding features:

- UL recognized, CSA approved
- high mechanical loading capacity
- oil resistant
- AWG 20 - AWG 10:
built acc. to VDE-Reg. no. 7000

Technical data:

Nominal voltage:	Uo/U 300/500 V
Voltage UL/CSA:	600 V
Testing voltage:	conductor/conductor: 3000 V conductor/shielding: 2000 V
Min. bending radius:	
fixed installation:	5 x O.D.
free movement:	10 x O.D.
Radiation resistance:	5 x 10 ⁷ cJ/kg
Temperature range:	DIN VDE -40/+70°C static: +5/+70°C flexible:
	UL/CSA: up to +90°C
Burning characteristics:	flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, UL VW-1, CSA FT1, FT2
Oil resistance:	very good - TM5 acc. to DIN VDE 0281 part 1 + HD 21.1, Oil 60°C acc. to UL 758, Fuel Oil acc. to CSA-C 22.2 No. 210
Chemical resistance:	see page O/11
Approvals:	UR AWM, CSA AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 20 AWG (≈ 16/32) • 0.50 mm²			
2592002	2	0.291	7.4
2592003	3	0.311	7.9
2592004	4	0.331	8.4
2592005	5	0.358	9.1
2592007	7	0.378	9.6
2592010	10	0.469	11.9
2592012	12	0.492	12.5
2592025	25	0.657	16.7
► 18 AWG (≈ 30/32) • 1.0 mm²			
2591802	2	0.327	8.3
2591803	3	0.339	8.6
2591804	4	0.370	9.4
2591805	5	0.402	10.2
2591807	7	0.437	11.1
2591809	9	0.535	13.6
2591812	12	0.555	14.1
2591818	18	0.642	16.3
2591825	25	0.772	19.6
			411

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 16 AWG (≈ 27-29/30) • 1.50 mm²			
2591602	2	0.358	9.1
2591603	3	0.374	9.5
2591604	4	0.406	10.3
2591605	5	0.433	11.0
2591607	7	0.480	12.2
2591612	12	0.614	15.6
2591618	18	0.724	18.4
2591625	25	0.878	22.3
► 14 AWG (≈ 46/30) • 2.50 mm²			
2591403	3	0.441	11.2
2591404	4	0.476	12.1
2591405	5	0.520	13.2
2591407	7	0.567	14.4
2591412	12	0.744	18.9
2591418	18	0.874	22.2
2591425	25	1.028	26.1
			773

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 12 AWG (≈ 52/28) • 4.00 mm²			
2591203	3	0.512	13.0
2591204	4	0.555	14.1
2591205	5	0.602	15.3
2591207	7	0.665	16.9
► 10 AWG (≈ 78/28) • 6.00 mm²			
2591003	3	0.587	14.9
2591004	4	0.630	16.0
2591005	5	0.705	17.9
2591007	7	0.772	19.6
► 8 AWG (≈ 69/26)			
2590804	4	0.807	20.5
► 6 AWG (≈ 110/26)			
2590604	4	0.957	24.3
► 4 AWG (≈ 175/26)			
2590404	4	1.157	29.4
► 2 AWG (≈ 272/26)			
2590204	4	1.346	34.2
► 1 AWG (≈ 342/26)			
2590104	4	1.441	36.6
			1882

Other dimensions and colors are available on request

also available with blue, red or orange conductors and black or orange jacket



VFD Cables for Greenhouses

VFD XLPE TR

Variable frequency drive - double shielded VFD cable with XLPE insulation

Type TC-ER



14, CSA AWM I/II A/B 90C 1000V FT4 RoHS CE



Marking for VFD XLPE TR 35681404:

SAB NORTH AMERICA VFD XLPE TR P/N 35681404 (UL) Type TC-ER 14AWG/3C RHW-2 CDRS + GNDG CDR 90C Dry/Wet 600V, Oil Res I & II, Sunlight Resistant, Direct Burial, (UL) WTTC 1000V, (UL) Flexible Motor Supply Cable, c(UL) CIC-TC XLPE 600V FT4, CSA AWM I/II A/B 90C 1000V FT4 RoHS CE

Construction:

Conductor:	tinned copper strands class K
Insulation:	special formulated crosslinked PE, ground wire PVC
Color code:	blackish gray conductors with consecutive white numbers and green/yellow ground
Stranding:	in layers
Shielding:	double shield, AMA foil and tinned copper braiding
Jacket material:	special sunlight and oil resistant copolymer
Jacket color:	black (RAL 9005)

Outstanding features:

- interconnection of variable frequency drive control device to variable frequency motors
- UL 90°C wet
- WTTC: UL subject 2277
- TC-ER UL standard 1277
- UL flexible motor supply cable 1000 V
- crosslinked conductors, better for longer installations
- Oil Res I & II
- double shielded (100% shielded)
- Class 1 Div 2 per NEC Article 501.4 (B)

Technical data:

Voltage:	(UL) / c(UL): 600 V CSA-AWM: 1000 V (UL) WTTC: 1000 V
Testing voltage:	3000 V
Min. bending radius:	12 x O.D.
Temperature range:	(UL) / c(UL) / CSA-AWM: up to +90°C static: -40/105°C
Burning characteristics:	(UL) / CSA FT4
Oil resistance I & II:	yes
Sunlight resistance:	yes
Exposed runs:	yes
Cold bend test:	-40°C
Direct burial:	yes
Approvals:	UL TC-ER, UL WTTC, c(UL) CIC-TC, CSA AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30



Temperature resistant
down to -40°C
Heavy duty application

item no.	AWG/c	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 35681604	16/4c	0.477	12.1
► 35681404	14/4c	0.522	13.3
► 35681204	12/4c	0.592	15.0
► 35681004	10/4c	0.680	17.3
► 35680804	8/4c	0.886	22.5
► 35680604	6/4c	0.968	24.6
► 35680404	4/4c	1.090	27.7
► 35680204	2/4c	1.247	31.7
► 35680104	1/4c	1.444	36.7
1190			

* UL TC-ER-JP (joist pull) available upon request

Larger AWG Sizes - minimum may apply

item no.	AWG/c	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 35681104	1/0-4c	1.565	39.8
► 35682104	2/0-4c	1.661	42.2
► 35683104	3/0-4c	1.830	46.5
► 35684104	4/0-4c	2.083	52.9
► 35682504	250/4c	2.217	56.3
► 35683504	350/4c	2.471	62.8
► 35685004	500/4c	3.121	79.3
8609			

Other dimensions and colors are possible on request.

VFD Cables for Greenhouses

VFD Combo XLPE

Variable frequency drive - double shielded VFD cable with XLPE insulation and shielded pair, Type TC-ER



FT4 CSA AWM I/II A/B 90°C 1000V FT1 FT2 CE



Marking for VFD Combo XLPE 35691404:

SAB NORTH AMERICA VFD Combo XLPE P/N 35691404 (UL) Type TC-ER 14AWG/3C RHW-2 CDRS + GNDG CDR + 14AWG/1PR 90C Dry/Wet 600V, Oil Res I & II, Sunlight Resistant, Direct Burial, (UL) WTTC 1000V, (UL) Flexible Motor Supply Cable, c(UL) CIC-TC XLPE 600V FT4, CSA AWM I/II A/B 90C 1000V FT4 RoHS CE

Construction:

Conductor:	tinned copper strands class K
Insulation:	special formulated crosslinked PE, ground wire: PVC, pair: PVC/Nylon
Color code:	blackish gray conductors with consecutive white numbers and green/yellow ground, pair is black with white #5 and #6
Stranding:	in layers
Shielding (pair):	aluminum foil and drain wire (drain wire same size as pair)
Shielding (overall):	double shield, AMA foil and tinned copper braiding
Jacket material:	special sunlight and oil resistant copolymer
Jacket color:	black (RAL 9005)

Outstanding features:

- interconnection of variable frequency drive control device to variable frequency motors
- shielded pairs for a brake or temperature sensor
- WTTC: UL subject 2277
- TC-ER: UL standard 1277
- UL flexible motor supply cable 1000 V
- crosslinked conductors, better for longer installations
- Oil Res I & II
- double shielded (100% shielded)
- rated for UL 90°C wet
- Class 1 Div 2 per NEC Article 501.4 (B)

Technical data:

Voltage:	(UL) / c(UL): 600 V CSA-AWM: 1000 V (UL) WTTC: 1000 V
Testing voltage:	3000 V
Min. bending radius:	12 x O.D.
Temperature range:	(UL) / c(UL) / CSA-AWM: up to +90°C static: -40/105°C
Burning characteristics:	(UL) / CSA FT4
Oil resistance I & II:	yes
Sunlight resistance:	yes
Exposed runs:	yes
Cold bend test:	-40°C
Direct burial:	yes
Approvals:	UL TC-ER, UL WTTC, c(UL) CIC-TC, CSA AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

Temperature resistant

down to -40°C

Heavy duty application



item no.	AWG/c	AWG/pair	outer-Ø ±10% inch	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 35691614	16/4c	18/1pr	0.573	14.6	144
► 35691624D	16/4c	16/1pr	0.580	14.7	210
► 35691414	14/4c	18/1pr	0.616	15.6	175
► 35691404	14/4c	14/1pr	0.628	16.0	213
► 35691424D	14/4c	16/1pr	0.626	15.9	257
► 35691464	14/4c	18/2pr	0.662	16.8	254
► 35691214	12/4c	18/1pr	0.654	16.6	231
► 35691224D	12/4c	16/1pr	0.662	16.8	308
► 35691204	12/4c	14/1pr	0.667	16.9	277
► 35691264	12/4c	18/2pr	0.698	17.7	299
► 35691004	10/4c	14/1pr	0.736	18.7	354
► 35691024D	10/4c	16/1pr	0.746	18.9	417

item no.	AWG/c	AWG/pair	outer-Ø ±10% inch	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 35691064	10/4c	18/2pr	0.762	19.4	383
► 35690804	8/4c	14/1pr	0.960	24.4	536
► 35690864	8/4c	18/2pr	0.961	24.4	576
► 35690604	6/4c	14/1pr	1.030	26.2	726
► 35690664	6/4c	16/2pr	1.032	26.2	766
► 35690404	4/4c	14/1pr	1.140	29.0	1011
► 35690464	4/4c	14/2pr	1.192	30.3	1068
► 35690204	2/4c	14/1pr	1.280	32.5	1401

Other dimensions and colors are possible on request.

D means drain wire in P/N

* UL TC-ER-JP (joist pull) available upon request

VFD Cables for Greenhouses

VFD Symmetrical XLPE TR

Variable frequency drive - double shielded VFD cable with XLPE insulation and 3 symmetrical grounds, Type TC-ER



600V FT4, CSA AWM I/II A/B 90C 1000V FT4 RoHS CE



Marking for VFD Symmetrical XLPE TR 35681003:

SAB NORTH AMERICA VFD Symmetrical XLPE TR P/N 35681003 (UL) TC-ER 10AWG/3C RHW-2 CDRS + 3 x 14 AWG GNDS 90C Dry/Wet, Oil Resistant I/II, Sunlight Resistant, Direct Burial, (UL) WTTC 1000V, (UL) Flexible Motor Supply Cable, c(UL) CIC-TC XLPE 600V FT4, CSA AWM I/II A/B 90C 1000V FT4 RoHS CE

Construction:

Conductor:	tinned copper strands class K
Insulation:	special formulated crosslinked PE
Color code:	blackish gray conductors with consecutive white numbers
Stranding:	in layers with 3 tinned ground wires in the interstices
Shielding:	double shield, AMA foil and tinned copper braiding
Jacket material:	special sunlight and oil resistant copolymer
Jacket color:	black (RAL 9005)

Outstanding features:

- interconnection of variable frequency drive control device to variable frequency motors
- WTTC approval
- finer strand for better flexibility
- TC-ER: UL standard 1277
- UL flexible motor supply cable 1000 V
- crosslinked conductors, better for longer installations
- Oil Res I & II
- double shielded (100% shielded)
- 3 symmetrical grounds
- Class 1 Div 2 per NEC Article 501.4 (B)

Technical data:

Voltage:	(UL) / c(UL): 600 V CSA-AWM: 1000 V (UL) WTTC: 1000 V
Testing voltage:	3000 V
Min. bending radius:	12 x O.D.
Temperature range:	(UL) / c(UL) / CSA-AWM: up to +90°C static: -40/105°C
Burning characteristics:	(UL) / CSA FT4
Oil resistance I & II:	yes
Sunlight resistance:	yes
Exposed runs:	yes
Cold bend test:	-40°C
Direct burial:	yes
Approvals:	UL TC-ER, UL WTTC, c(UL) CIC-TC, CSA AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no.	AWG/c kcmil/c	ground wire n x AWG	outer-d ±10% inch	outer-d ±10% inch	cable weight ≈lbs/mft
► 35681403	14/3c	3x18	0.501	12.7	170
► 35681203	12/3c	3x16	0.570	14.5	230
► 35681003	10/3c	3x14	0.642	16.3	312
► 35680803	8/3c	3x14	0.811	20.6	465
► 35680603	6/3c	3x12	0.954	24.2	674
► 35680403	4/3c	3x12	1.062	27.0	877
► 35680203	2/3c	3x10	1.226	31.1	1266
► 35680103	1/3c	3x8	1.305	33.1	1545
► 35681103	1/0-3c	3x8	1.408	35.8	1757
► 35682103	2/0-3c	3x8	1.507	38.3	2167
► 35683103	3/0-3c	3x6	1.601	40.7	2508
► 35684103	4/0-3c	3x6	1.890	48.0	3060
► 35682503	250/3c	3x6	2.005	50.9	3680
► 35683503	350/3c	3x2	2.231	56.7	5170
► 35685003	500/3c	3x2	2.490	63.2	6353

Other dimensions and colors are possible on request.

Temperature resistant
down to -40°C
Heavy duty application



Continuous Flex Cables for Greenhouses

TR 600 Auto HD

Continuous flex heavy duty tray cable

Type TC-ER



600V FT4 CSA AWM I/II A/B 90C 600V FT4 RoHS CE



Marking for TR 600 Auto HD 32321604:

SAB NORTH AMERICA TR 600 Auto HD 16AWG/4c P/N 32321604 (UL) TC-ER 90C DRY 75 C WET 600V OIL RES I/II SUN RES DIR BUR OR WTTC 1000V OR AWM 21270 105C 600V OR c (UL) CIC-TC PVC/N 600V FT4 CSA AWM I/II A/B 90C 600V FT4 RoHS CE

Construction:

Conductor:	bare copper strands class M
Insulation:	special formulated PVC/Nylon
Color code:	black with numerical print* and one green/yellow earth ground** *Alpha-Numeric Alternate and Inverted, ie: 1-ONE
Stranding:	in layers with fleece tape separator
Jacket material:	TPE
Jacket color:	black (RAL 9005)

Outstanding features:

- heavy duty tray cable and control and instrumentation cable
- UL-AWM 21270 recognized for 105°C
- extremely oil resistant
- WTTC: UL subject 2277
- TC: UL standard 1277
- CSA listed
- NFPA 79 for Industrial Machinery
- c(UL) CIC-TC FT4
- continuous flex applications
- Class 1 Div 2 per NEC Article 501.4 (B)

Technical data:

Voltage:	UL-AWM / (UL) / c(UL): 600 V (UL) WTTC: 1000 V
Testing voltage:	2500 V
Min. bending radius:	
fixed installation:	4 x O.D.
free movement:	6 x O.D.
continuous flexing:	10 x O.D.
Temperature range:	UL-AWM up to +105°C static: -40°C
Cold bend test:	-40°C
Burning characteristics:	(UL) / CSA FT4
Oil resistance I & II:	yes
Exposed runs:	yes
Approvals:	UL TC-ER, UL WTTC, UR AWM, c(UL) CIC-TC, CSA AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30
Alt. Color code:	** Add B at the end of Part No. for Blue conductors: blue conductors with numbers; one white-blue conductor and green/yellow ground
	** Add R at the end of Part No. for Red conductors: red conductors with numbers; one white-red conductor and green/yellow ground

item no.	no. of conductors incl. ground	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
► 18 AWG				
32321803	3	0.302	7.7	48
32321804	4	0.325	8.3	58
32321805	5	0.350	8.9	75
32321807	7	0.405	10.3	94
32321812	12	0.480	12.2	134
32321818	18	0.589	15.0	214
32321825	25	0.714	18.1	307
► 16 AWG				
32321603	3	0.336	8.5	63
32321604	4	0.364	9.2	77
32321605	5	0.394	10.0	98
32321607	7	0.458	11.6	125
32321612	12	0.580	14.7	204
32321618	18	0.669	17.0	300
32321625	25	0.819	20.8	423

item no.	no. of conductors incl. ground	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
► 14 AWG				
32321403	3	0.361	9.2	82
32321404	4	0.391	9.9	102
32321405	5	0.423	10.7	125
32321407	7	0.495	12.6	169
32321412	12	0.625	15.9	282
► 12 AWG				
32321203	3	0.420	10.7	115
32321204	4	0.458	11.6	145
32321205	5	0.499	12.7	189
32321207	7	0.621	15.8	264
32321212	12	0.742	18.8	398
► 10 AWG				
32321003	3	0.506	12.9	179
32321004	4	0.590	15.0	248
32321005	5	0.642	16.3	298

item no.	no. of conductors incl. ground	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
► 8 AWG				
32320804	4	0.756	19.2	385
32320805	5	0.826	21.0	465
► 6 AWG				
32320603	3	0.767	19.5	426
32320604	4	0.879	22.3	580
► 4 AWG				
32320404	4	1.061	26.9	845
32320405	5	1.177	29.9	1035
► 2 AWG				
32320204	4	1.235	31.4	1278
32320205	5	1.363	34.6	1575

Other dimensions and colors are available on request

Possible on request:

- with gray jacket as well as blue
- or red conductors

* For blue conductors add B at end of P/N, for red add an R, ie 32321404B

Continuous Flex Cables for Greenhouses

TR 600 Auto C HD

Shielded continuous flex heavy duty tray cable
Type TC-ER



CSA AWM I/II A/B 90C 600V FT4 RoHS CE



Marking for TR 600 Auto C HD 32421604:

SAB NORTH AMERICA TR 600 Auto HD 16AWG/4c P/N 32421604 UL TC-ER 90C DRY 75 C WET 600V OIL RES I/II SUN RES DIR BUR OR WTTC 1000V OR AWM 21270 105C 600V OR c UL CIC-TC PVC/N 600V FT4 CSA AWM I/II A/B 90C 600V FT4 RoHS CE

Construction:

Conductor:	bare copper strands class M
Insulation:	special formulated PVC/Nylon
Color code:	black with numerical print* and one green/yellow earth ground** *Alpha-Numeric Alternate and Inverted, ie: 1-ONE
Stranding:	in layers
Wrapping:	fleece binder
Shielding:	tinned copper braiding (85% coverage)
Separator:	tissue tape
Jacket material:	TPE
Jacket color:	black (RAL 9005)

Outstanding features:

- heavy duty tray cable and control and instrumentation cable
- UL-AWM 21270 recognized for 105°C
- extremely oil resistant
- WTTC: UL subject 2277
- TC: UL standard 1277
- CSA listed
- NFPA 79 for Industrial Machinery
- c(UL) CIC-TC FT4
- continuous flex applications
- Class 1 Div 2 per NEC Article 501.4 (B)

Technical data:

Voltage:	UL-AWM / (UL) / c(UL): 600 V (UL) WTTC: 1000 V
Testing voltage:	2500 V
Min. bending radius: <i>fixed installation:</i> <i>free movement:</i> <i>continuous flexing:</i>	5 x O.D. 10 x O.D. 12 x O.D.
Temperature range: <i>static:</i>	UL-AWM up to +105°C -40°C
Cold bend test:	-40°C
Burning characteristics:	(UL) / CSA FT4
Oil resistance I & II:	yes
Exposed runs:	yes
Approvals:	UL TC-ER, UL WTTC, UR AWM, c(UL) CIC-TC, CSA AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30
Alt. Color code:	** Add B at the end of Part No. for Blue conductors: blue conductors with numbers; one white-blue conductor and green/yellow ground
	** Add R at the end of Part No. for Red conductors: red conductors with numbers; one white-red conductor and green/yellow ground

item no.	no. of conductors incl. ground	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
► 18 AWG				
32421803	3	0.322	8.2	45
32421804	4	0.345	8.8	85
32421807	7	0.425	10.8	120
32421812	12	0.500	12.7	185
32421818	18	0.609	15.5	260
32421825	25	0.714	18.1	307
► 16 AWG				
32421603	3	0.356	9.0	78
32421604	4	0.384	9.8	100
32421605	5	0.414	10.5	127
32421607	7	0.478	12.1	145
32421612	12	0.600	15.2	245
32421618	18	0.669	17.0	337
32421625	25	0.883	22.4	541

item no.	no. of conductors incl. ground	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
► 14 AWG				
32421403	3	0.381	9.7	108
32421404	4	0.411	10.4	123
32421405	5	0.443	11.3	147
32421407	7	0.515	13.1	185
► 12 AWG				
32421204	4	0.478	12.1	178
32421205	5	0.519	13.2	210
32421207	7	0.586	14.9	272
► 10 AWG				
32421004	4	0.613	15.6	280
32421005	5	0.673	17.1	350
► 8 AWG				
32420804	4	0.785	19.9	450

item no.	no. of conductors incl. ground	outer-Ø inch	outer-Ø mm	cable weight ≈lbs/mft
► 6 AWG				
32420604	4	0.914	23.2	630
► 4 AWG				
32420404	4	1.094	27.8	945
► 2 AWG				
32420204	4	1.264	32.1	1450

Other dimensions and colors are available on request

Possible on request:

- with blue or red conductors

* For blue conductors add B at end of P/N, for red add an R, ie 32421404B

Continuous Flex Cables for Greenhouses

S 900

Continuous flex oil resistant power supply cable for small bend radius applications



10455 90°C 600V CSA AWM I/II A/B 90°C 600V FT1 FT2



Marking for S 900 7671362:

SAB BRÖCKSKES · D-VIERSEN · 7670601 16.0 mm² S 900 6 AWG 7671362 AWM Style 10455 90°C 600V CSA AWM I/II A/B 90°C 600V FT1 FT2 CE

Construction:

Conductor:	bare copper strands acc. to IEC 60228, VDE 0295, class 6
Insulation:	PVC, TI2 acc. to EN 50363-3 + VDE 0207-363-3, black
Wrapping:	non-woven tape
Jacket material:	PVC, TM5 acc. to EN 50363-3 + VDE 0207-363-3
Jacket color:	black (RAL 9005)

Outstanding features:

- highly flexible single conductor
for use in cable tracks
- UV resistant jacket

Technical data:

Nominal voltage:	Uo/U 0.6/1 kV
Voltage UL/CSA:	600 V
Min. bending radius: continuously flexing:	7.5 x O.D.
Radiation resistance:	8 x 10 ⁷ cJ/kg
Temperature range: static:	DIN VDE -40/+70°C
flexing:	UL/CSA: up to +90°C +5/+70°C
Burning characteristics:	flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, UL VW-1, CSA FT1, FT2
Oil resistance:	very good - TM5 acc. to EN 50363-3 + VDE 0207-363-3
Approvals:	UR AWM, CSA AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no.	no. of conductors n x mm ²	AWG/MCM	outer-Ø ±10% inch	outer-Ø ±10% mm	cable weight ≈lbs/mft	ampere at 30° C
► 7671315	1 x 1.50	16 (≈ 84/34)	0.193	4.9	26	24
► 7671325	1 x 2.50	14 (≈ 140/34)	0.228	5.8	37	32
► 7671340	1 x 4.00	12 (≈ 224/34)	0.260	6.6	52	42
► 7671360	1 x 6.00	10 (≈ 186/32)	0.287	7.3	70	54
► 7671361	1 x 10.00	8 (≈ 320/32)	0.358	9.1	108	73
► 7671362	1 x 16.00	6 (≈ 512/32)	0.398	10.1	155	98
► 7671363	1 x 25.00	4 (≈ 798/32)	0.472	12.0	226	129
► 7671364	1 x 35.00	2 (≈ 1083/32)	0.539	13.7	305	158
► 7671365	1 x 50.00	1 (≈ 703/28)	0.622	15.8	425	198
► 7671385	1 x 54.00	1/0 (≈ 779/28)	0.642	16.3	455	213
► 7671386	1 x 68.00	2/0 (≈ 969/28)	0.673	17.1	530	226
► 7671366	1 x 70.00	2/0 (≈ 988/28)	0.681	17.3	540	245
► 7671387	1 x 86.00	3/0 (≈ 1218/28)	0.776	19.7	696	263
► 7671367	1 x 95.00	3/0 (≈ 1340/28)	0.827	21.0	770	292
► 7671388	1 x 108.00	4/0 (≈ 1528/28)	0.886	22.5	864	313
► 7671368	1 x 120.00	4/0 (≈ 1680/28)	0.898	22.8	941	344
► 7671389	1 x 127.00	250 MCM (≈ 1799/28)	0.917	23.3	1001	370
► 7671369	1 x 150.00	250 MCM (≈ 2122/28)	0.969	24.6	1158	391
► 7671390	1 x 152.00	300 MCM (≈ 2154/28)	0.969	24.6	1158	396
► 7671391	1 x 177.00	350 MCM (≈ 1443/26)	1.051	26.7	1378	430
► 7671370	1 x 185.00	350 MCM (≈ 1472/26)	1.051	26.7	1401	448
► 7671392	1 x 204.00	400 MCM (≈ 1628/26)	1.197	30.4	1620	470
► 7671393	1 x 232.00	450 MCM (≈ 1850/26)	1.240	31.5	1809	490
► 7671371	1 x 240.00	450 MCM (≈ 1910/26)	1.240	31.5	1856	528
► 7671394	1 x 255.00	500 MCM (≈ 2035/26)	1.252	31.8	1962	535
► 7671395	1 x 283.00	550 MCM (≈ 2257/26)	1.323	33.6	2284	560
► 7671372	1 x 300.00	550 MCM (≈ 2388/26)	1.350	34.3	2286	608
► 7671396	1 x 306.00	600 MCM (≈ 2442/26)	1.350	34.3	2329	613

from 283 mm² only UL recognition.
Other dimensions and colors are possible on request.



Possible on request:

- with green/yellow insulation

Continuous Flex Cables for Greenhouses

SD 960

Continuous flex data cable for small bending radius



25c 37102625 AWM Style 21083 80°C 300V CE



Marking for SD 960 37102625:

SAB BRÖCKSKES · D-VIERSEN · 37102625 25 x 0.14 mm² SD 960 26 AWG/25c 37102625 AWM Style 21083 80°C 300V CE

Construction:

Conductor:	bare copper strands, extra fine wires
Insulation:	PVC, TI2 acc. to EN 50363-3 + VDE 0207-363-3
Color code:	acc. to color code US 2, see below
Stranding:	specially adjusted layering with non-woven tape over each layer
Jacket material:	PVC, TM2 acc. to EN 50363-3 + VDE 0207-363-3
Jacket color:	grayish tan (RAL 7032)

Outstanding features:



- very good flexibility
- small bending radius
- reinforced outer jacket

Technical data:

Peak operating voltage:	max. 350 V	
Voltage UL:	300 V	
Testing voltage:	conductor/conductor: 1500 V	
Min. bending radius:		
<i>continuously flexing:</i>	7.5 x O.D.	
Radiation resistance:	8 x 10 ⁷ cJ/kg	
Temperature range:	DIN VDE -30/+70°C static: flexing:	UL/CSA: up to +80°C -5/+70°C
Burning characteristics:	flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, UL VW-1	
Oil resistance:	acc. to our internal standard, see page O/29	
Approvals:	UR AWM, CE, RoHS	
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30	

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 26 AWG (≈ 18/38) • 0.14 mm²			
37102602	2	0.154	3.9
37102603	3	0.161	4.1
37102604	4	0.177	4.5
37102605	5	0.193	4.9
37102607	7	0.224	5.7
37102610	10	0.264	6.7
37102614	14	0.283	7.2
37102618	18	0.323	8.2
37102625	25	0.398	10.1
11			

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 24 AWG (≈ 32/38) • 0.25 mm²			
37102402	2	0.165	4.2
37102403	3	0.177	4.5
37102404	4	0.189	4.8
37102405	5	0.209	5.3
37102407	7	0.248	6.3
37102410	10	0.287	7.3
37102414	14	0.319	8.1
37102418	18	0.354	9.0
37102425	25	0.433	11.0
15			

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 22 AWG (≈ 42/38) • 0.34 mm²			
37102202	2	0.173	4.4
37102203	3	0.185	4.7
37102204	4	0.201	5.1
37102205	5	0.217	5.5
37102207	7	0.260	6.6
37102210	10	0.311	7.9
37102214	14	0.335	8.5
37102218	18	0.374	9.5
37102225	25	0.461	11.7
17			

Other dimensions and colors are available on request


US 2 color code:

#1- black, #2- white, #3- red, #4- green, #5- orange, #6- blue, #7- white-black, #8- red-black, #9- green-black, #10- orange-black, #11- blue-black, #12- black-white, #13- red-white, #14- green-white, #15- blue-white, #16- black-red, #17- white-red, #18- orange-red, #19- blue-red, #20- red-green, #21- orange-green, #22- black-white-red, #23- white-black-red, #24- red-black-white, #25- green-black-white

Continuous Flex Cables for Greenhouses

S 960

Continuous flex control cable for small bending radius with black conductors



37 90°C 600V CSA AWM I/II A/B 90°C 600V FT1 FT2 CE



Marking for S 960 7521612:

SAB BRÖCKSKES · D-VIERSEN · 7521215 12 x 1.5 mm² S 960 16 AWG/12c 7521612 AWM Style 2587 90°C 600V CSA AWM I/II A/B 90°C 600V FT1 FT2 CE

Construction:

Conductor:	bare copper strands acc. to IEC 60228, VDE 0295, class 6
Insulation:	PVC, Ti2 acc. to EN 50363-3 + VDE 0207-363-3
Color code:	black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334, green/yellow ground from 3 conductors
Stranding:	specially adjusted layering with non-woven tape over each layer
Jacket material:	PVC, TM2 acc. to EN 50363-3 + VDE 0207-363-3
Jacket color:	black (RAL 9005)



Outstanding features:

- very good flexibility
- small bending radius
- reinforced outer jacket
- UV resistant jacket

Technical data:

Nominal voltage:	Uo/U 300/500 V
Voltage UL/CSA:	600 V
Testing voltage:	conductor/conductor: 2000 V
Min. bending radius: <i>continuously flexing:</i>	7.5 x O.D.
Radiation resistance:	8 x 10 ⁷ cJ/kg
Temperature range: <i>static:</i>	DIN VDE
<i>flexing:</i>	-40/+70°C
	+5/+70°C
Burning characteristics:	flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, UL VW-1, CSA FT1, FT2
Oil resistance:	acc. to our internal standard, see page O/29
Approvals:	UR AWM, CSA AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no. no. of conductors incl. ground outer-Ø ±10% inch cable weight ≈lbs/mft

► 20 AWG (≈ 28/34) • 0.50 mm²

7522002	2	0.217	5.5	27
7522003	3	0.228	5.8	32
7522004	4	0.248	6.3	38
7522005	5	0.276	7.0	48
7522007	7	0.323	8.2	66
7522012	12	0.398	10.1	97
7522018	18	0.472	12.0	142
7522025	25	0.567	14.4	191
7522034	34	0.638	16.2	254
7522050	50	0.752	19.1	351
7522061	61	0.831	21.1	440

► 19 AWG (≈ 42/34) • 0.75 mm²

7521902	2	0.232	5.9	32
7521903	3	0.248	6.3	38
7521904	4	0.268	6.8	46
7521905	5	0.295	7.5	5
7521907	7	0.358	9.1	82
7521912	12	0.433	11.0	119
7521918	18	0.516	13.1	175
7521925	25	0.622	15.8	238
7521934	34	0.705	17.9	318
7521950	50	0.831	21.1	450
7521961	61	0.925	23.5	558

► 18 AWG (≈ 56/34) • 1.00 mm²

7521802	2	0.244	6.2	37
7521803	3	0.256	6.5	44
7521804	4	0.283	7.2	55
7521805	5	0.311	7.9	68
7521807	7	0.370	9.4	95
7521809	9	0.445	11.3	136
7521812	12	0.453	11.5	142
7521815	15	0.516	13.1	187
7521818	18	0.539	13.7	210

item no. no. of conductors incl. ground outer-Ø ±10% inch cable weight ≈lbs/mft

► 18 AWG (≈ 56/34) • 1.00 mm²

7521825	25	0.650	16.5	285
7521834	34	0.736	18.7	382
7521850	50	0.886	22.5	555
7521861	61	0.965	24.5	671

► 16 AWG (≈ 84/34) • 1.50 mm²

7521602	2	0.268	6.8	47
7521603	3	0.287	7.3	59
7521604	4	0.315	8.0	73
7521605	5	0.346	8.8	91
7521607	7	0.417	10.6	129
7521609	9	0.496	12.6	179
7521612	12	0.512	13.0	194
7521618	18	0.606	15.4	286
7521625	25	0.736	18.7	390
7521634	34	0.831	21.1	522
7521650	50	0.988	25.1	749
7521661	61	1.087	27.6	915

► 14 AWG (≈ 140/34) • 2.50 mm²

7521402	2	0.35	8.9	79
7521403	3	0.374	9.5	97
7521404	4	0.409	10.4	120
7521405	5	0.457	11.6	150
7521407	7	0.551	14.0	214
7521412	12	0.681	17.3	323
7521418	18	0.815	20.7	480
7521425	25	0.988	25.1	654

► 12 AWG (≈ 224/34) • 4.00 mm²

7521203	3	0.445	11.3	150
7521204	4	0.488	12.4	179
7521205	5	0.543	13.8	230
7521207	7	0.657	16.7	331



also available with gray jacket and blue or red conductors

Continuous Flex Cables for Greenhouses

SD 960 CY

Shielded continuous flex data cable for small bending radius



Marking for SD 960 CY 7852425:

SAB BRÖCKSKES · D-VIERSEN · 7852502 25 x 0.25 mm² SD 960 CY 24 AWG/25c 7852425 AWM Style 21083 80°C 300V CE

Construction:

Conductor:	bare copper strands, extra fine wires
Insulation:	PVC, TI2 acc. to EN 50363-3 + VDE 0207-363-3
Color code:	acc. to color code US 2, see below
Stranding:	specially adjusted layering with non-woven tape over each layer
Wrapping:	non-woven tape
Shielding:	tinned copper braiding
Wrapping:	non-woven tape
Jacket material:	PVC, TM2 acc. to EN 50363-3 + VDE 0207-363-3
Jacket color:	black (RAL 9005)

Outstanding features:



- good EMC characteristics
- very good flexibility
- small bending radius
- UV resistant jacket

Technical data:

Peak operating voltage:	max. 350 V
Voltage UL:	300 V
Testing voltage:	conductor/conductor: 1500 V conductor/shielding: 1200 V
Min. bending radius: <i>continuously flexing:</i>	7.5 x O.D.
Radiation resistance:	8 x 10 ⁷ cJ/kg
Temperature range: <i>static:</i>	DIN VDE -30/+70°C
<i>flexing:</i>	+5/+70°C
Burning characteristics:	flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, UL VW-1
Oil resistance:	acc. to our internal standard, see page O/29
Approvals:	UR AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 26 AWG (≈ 18/38) • 0.14 mm²			
7852602	2	0.177	4.5
7852603	3	0.185	4.7
7852604	4	0.205	5.2
7852605	5	0.220	5.6
7852607	7	0.252	6.4
7852610	10	0.295	7.5
7852614	14	0.335	8.5
7852618	18	0.366	9.3
7852625	25	0.433	11.0
100			

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 24 AWG (≈ 32/38) • 0.25 mm²			
7852402	2	0.193	4.9
7852403	3	0.205	5.2
7852404	4	0.217	5.5
7852405	5	0.244	6.2
7852407	7	0.280	7.1
7852410	10	0.335	8.5
7852414	14	0.362	9.2
7852418	18	0.398	10.1
7852425	25	0.492	12.5
134			

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 22 AWG (≈ 42/38) • 0.34 mm²			
7852202	2	0.201	5.1
7852203	3	0.213	5.4
7852204	4	0.228	5.8
7852205	5	0.252	6.4
7852207	7	0.291	7.4
7852210	10	0.346	8.8
7852214	14	0.378	9.6
7852218	18	0.425	10.8
7852225	25	0.512	13.0
153			

Other dimensions and colors are available on request


US 2 color code:

#1- black, #2- white, #3- red, #4- green, #5- orange, #6- blue, #7- white-black, #8- red-black, #9- green-black, #10- orange-black, #11- blue-black, #12- black-white, #13- red-white, #14- green-white, #15- blue-white, #16- black-red, #17- white-red, #18- orange-red, #19- blue-red, #20- red-green, #21- orange-green, #22- black-white-red, #23- white-black-red, #24- red-black-white, #25- green-black-white

Continuous Flex Cables for Greenhouses

S 960 CY

Shielded continuous flex control cable for small bending radius with black conductors



600V CSA AWM I/II A/B 90°C 600V FT1 FT2 CE

Marking for S 960 CY 7541607:

SAB BRÖCKSKES · D-VIERSEN · 754715 7 x 1.5 mm² S 960 CY 16 AWG/7c 7541607 AWM Style 2587 90°C 600V CSA AWM I/II A/B 90°C 600V FT1 FT2 CE



Construction:

Conductor:	bare copper strands acc. to IEC 60228, VDE 0295, class 6
Insulation:	PVC, TI2 acc. to EN 50363-3 + VDE 0207-363-3
Color code:	black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334, green/yellow ground from 3 conductors
Stranding:	specially adjusted layering with non-woven tape over each layer
Inner jacket:	PVC, TM2 acc. to EN 50363-3 + VDE 0207-363-3
Shielding:	tinned copper braiding
Wrapping:	non-woven tape
Jacket material:	PVC, TM2 acc. to EN 50363-3 + VDE 0207-363-3
Jacket color:	black (RAL 9005)

Outstanding features:



- very good EMC characteristics
- very good flexibility
- small bending radius
- UV resistant jacket

Technical data:

Nominal voltage:	Uo/U 300/500 V
Voltage UL/CSA:	600 V
Testing voltage:	conductor/conductor: 2000 V conductor/shielding: 2000 V
Min. bending radius: continuously flexing:	7.5 x O.D.
Radiation resistance:	8 x 10 ⁷ cJ/kg
Temperature range: static:	DIN VDE -40/+70°C
flexing:	UL/CSA: up to +90°C +5/+70°C
Burning characteristics:	flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, UL VW-1, CSA FT1, FT2
Oil resistance:	acc. to our internal standard, see page O/29
Approvals:	UR AWM, CSA AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 20 AWG (≈ 28/34) • 0.50 mm²			
7542002	2	0.311	7.9
7542003	3	0.323	61
7542004	4	0.343	8.7
7542005	5	0.370	9.4
7542007	7	0.421	10.7
7542012	12	0.516	13.1
7542018	18	0.594	15.1
7542025	25	0.697	17.7
► 19 AWG (≈ 42/34) • 0.75 mm²			
7541902	2	0.327	8.3
7541903	3	0.343	8.7
7541904	4	0.366	9.3
7541905	5	0.394	10.0
7541907	7	0.457	11.6
7541912	12	0.551	14.0
7541918	18	0.638	16.2
7541925	25	0.764	19.4
► 18 AWG (≈ 56/34) • 1.00 mm²			
7541802	2	0.339	8.6
7541803	3	0.350	8.9
7541804	4	0.374	9.5
7541805	5	0.406	10.3
7541807	7	0.476	12.1
7541812	12	0.579	14.7
7541818	18	0.665	16.9
7541825	25	0.791	20.1
7541836	36	0.890	22.6

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 16 AWG (≈ 84/34) • 1.50 mm²			
7541602	2	0.366	9.3
7541603	3	0.382	9.7
7541604	4	0.409	10.4
7541605	5	0.453	11.5
7541607	7	0.531	13.5
7541612	12	0.638	16.2
7541618	18	0.744	18.9
7541625	25	0.886	22.5
► 14 AWG (≈ 140/34) • 2.50 mm²			
7541402	2	0.449	11.4
7541403	3	0.472	12.0
7541404	4	0.516	13.1
7541405	5	0.571	14.5
7541407	7	0.622	15.8
7541412	12	0.803	20.4
7541418	18	0.933	23.7
7541425	25	1.110	28.2
► 12 AWG (≈ 224/34) • 4.00 mm²			
7541203	3	0.539	13.7
7541204	4	0.575	14.6
7541205	5	0.630	16.0
7541207	7	0.760	19.3
► 10 AWG (≈ 186/32) • 6.00 mm²			
7541003	3	0.638	16.2
7541004	4	0.685	17.4
7541005	5	0.760	19.3

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 8 AWG (≈ 320/32) • 10.00 mm²			
7540804	4	0.835	21.2
7540805	5	0.925	23.5
► 6 AWG (≈ 504/32) • 16.00 mm²			
7540604	4	0.980	24.9
7540605	5	1.079	27.4
► 4 AWG (≈ 760/32) • 25.00 mm²			
7540404	4	1.165	29.6
7540405	5	1.291	32.8
► 2 AWG (≈ 1083/32) • 35.00 mm²			
7540204	4	1.303	33.1
► 1 AWG (≈ 703/28) • 50.00 mm²			
7540104	4	1.567	39.8
Other dimensions and colors are available on request			

Continuous Flex Cables for Greenhouses

SD 960 CY TP

Continuous flex twisted pairs shielded data cable for small bending radius



Marking for SD 960 CY TP 7772403:

SAB BRÖCKSKES · D-VIERSEN · 7770325 3 x 2 x 0.25 mm² SD 960 CY TP 24 AWG/3pr 7772403 AWM Style 21083 80°C 300V CE

Construction:

Conductor:	bare copper strands, extra fine wires
Insulation:	PVC, TI2 acc. to EN 50363-3 + VDE 0207-363-3
Color code:	acc. to color code US 3, see below
Stranding:	conductors twisted to pairs, pairs twisted in specially adjusted layering with non-woven tape over the outer layer
Shielding:	tinned copper braiding
Jacket material:	PVC, TM2 acc. to EN 50363-3 + VDE 0207-363-3
Jacket color:	black (RAL 9005)

Outstanding features:



- very good flexibility
- small bending radius
- UV resistant jacket

Technical data:

Peak operating voltage:	max. 350 V
Voltage UL:	300 V
Testing voltage:	conductor/conductor: 1500 V conductor/shielding: 1200 V
Min. bending radius: <i>continuously flexing:</i>	7.5 x O.D.
Radiation resistance:	8 x 10 ⁷ cJ/kg
Temperature range: <i>static:</i>	DIN VDE -30/+70°C
<i>flexing:</i>	UL/CSA: up to +80°C -5/+70°C
Burning characteristics:	flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, UL VW-1
Oil resistance:	acc. to our internal standard, see page O/29
Approvals:	UR AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no. no. of pairs outer-Ø ±10% inch cable weight ≈lbs/mft

► 26 AWG (≈ 18/38) • 0.14 mm²

7772602	2	0.240	6.1	32
7772603	3	0.264	6.7	39
7772604	4	0.299	7.6	46
7772605	5	0.339	8.6	57
7772607	7	0.362	9.2	73
7772610	10	0.421	10.7	93
7772614	14	0.504	12.8	123
7772618	18	0.547	13.9	163
7772625	25	0.634	16.1	210

► 24 AWG (≈ 32/38) • 0.25 mm²

7772402	2	0.256	6.5	36
7772403	3	0.283	7.2	47
7772404	4	0.335	8.5	58
7772405	5	0.366	9.3	69
7772407	7	0.386	9.8	91
7772410	10	0.461	11.7	116
7772414	14	0.555	14.1	168
7772418	18	0.594	15.1	205
7772425	25	0.689	17.5	265

item no. no. of pairs outer-Ø ±10% inch cable weight ≈lbs/mft

► 22 AWG (≈ 42/38) • 0.34 mm²

7772202	2	0.268	6.8	40
7772203	3	0.291	7.4	51
7772204	4	0.350	8.9	69
7772205	5	0.378	9.6	79
7772207	7	0.417	10.6	111
7772210	10	0.492	12.5	131
7772214	14	0.587	14.9	193
7772218	18	0.646	16.4	240
7772225	25	0.724	18.4	299

item no. no. of pairs outer-Ø ±10% inch cable weight ≈lbs/mft

► 20 AWG (≈ 28/34) • 0.50 mm²

7772002	2	0.291	7.4	47
7772003	3	0.339	8.6	70
7772004	4	0.386	9.8	86
7772005	5	0.425	10.8	108
7772007	7	0.461	11.7	138
7772010	10	0.555	14.1	187
7772014	14	0.657	16.7	251
7772018	18	0.705	17.9	308
7772025	25	0.795	20.2	387

Other dimensions and colors are available on request

US 3 color code:

#1- black paired with red, #2- black paired with white, #3- black paired with green, #4- black paired with blue, #5- black paired with yellow, #6- black paired with brown, #7- black paired with orange, #8- red paired with white, #9- red paired with green, #10- red paired with blue, #11- red paired with yellow, #12- red paired with brown, #13- red paired with orange, #14- green paired with white, #15- green paired with blue, #16- green paired with yellow, #17- green paired with brown, #18- green paired with orange, #19- white paired with blue, #20- white paired with yellow, #21- white paired with brown, #22- white paired with orange, #23- blue paired with yellow, #24- blue paired with brown, #25- blue paired with orange

Possible on request:

- with gray jacket and colored conductors acc. to DIN 47100



Continuous Flex Cables for Greenhouses

SD 200

Continuous flex halogen-free polyurethane data cable with extreme temperature range



RÖCKSKES · D-VIERSEN · SD 200 25 x 0.14 mm² CE

Marking for SD 200 7742501:

SAB RÖCKSKES · D-VIERSEN · SD 200 25 x 0.14 mm² CE

Construction:

Conductor:	bare copper strands, extra fine wires
Insulation:	TPE
Color code:	DIN 47100, see bwlow
Stranding:	specially adjusted layering with non-woven tape over each layer
Wrapping:	non-woven tape
Jacket material:	PUR, TMPU acc. to EN50363-10-2 + VDE 0207-363-10-2 with matte surface
Jacket color:	grayish tan (RAL 7032)



Outstanding features:

- free from paint wetting impairment substances (PWIS-free)
- flexible at low temperatures
- halogen-free
- travel > 10 m is possible
- high abrasion resistance
- minimal bending radius
- small outer diameter

Technical data:

Peak operating voltage:	max. 350 V acc. to VDE 0812
Testing voltage:	conductor/conductor: 1500 V
Min. bending radius: <i>continuously flexing:</i>	7.5 x O.D.
Radiation resistance:	1 x 10 ⁷ cJ/kg
Temperature range: <i>static:</i>	DIN VDE -50/+90°C
<i>flexing:</i>	-40/+90°C
Halogen-free:	acc. to IEC 60754-1 + VDE 0482-754-1
Oil resistance:	very good - TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Chemical resistance:	good against acids, alkalines, solvents, hydraulic liquids, etc.
Continuous flexibility	very good
Weather resistance:	very good
Approvals:	CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 26 AWG (≈ 18/38) • 0.14 mm²			
7740201	2	0.110	2.8
7740301	3	0.114	2.9
7740401	4	0.126	3.2
7740501	5	0.142	3.6
7740701	7	0.165	4.2
7741001	10	0.193	4.9
7741201	12	0.197	5.0
7741401	14	0.205	5.2
7741801	18	0.232	5.9
7742501	25	0.280	7.1
7743201	32	0.299	7.6
			52

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 24 AWG (≈ 32/38) • 0.25 mm²			
7740202	2	0.122	3.1
7740302	3	0.130	3.3
7740402	4	0.146	3.7
7740502	5	0.161	4.1
7740702	7	0.185	4.7
7741002	10	0.217	5.5
7741202	12	0.224	5.7
7741402	14	0.232	5.9
7741802	18	0.268	6.8
7742502	25	0.319	8.1
7743202	32	0.350	8.9
			81

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 22 AWG (≈ 42/38) • 0.34 mm²			
7740203	2	0.130	3.3
7740303	3	0.146	3.7
7740403	4	0.157	4.0
7740503	5	0.169	4.3
7740703	7	0.197	5.0
7741003	10	0.232	5.9
7741203	12	0.248	6.3
7741403	14	0.260	6.6
7741803	18	0.287	7.3
7742503	25	0.350	8.9
7743203	32	0.374	9.5
			99

Other dimensions and colors are available on request

DIN 47100 color code:

#1- white, #2- brown, #3- green, #4- yellow, #5- gray, #6- pink, #7- blue, #8- red, #9- black, #10- violet, #11- gray-pink, #12- red-blue, #13- white-green, #14- brown-green, #15- white-yellow, #16- yellow-brown, #17- white-gray, #18- gray-brown, #19- white-pink, #20- pink-brown, #21- white-blue, #22- brown-blue, #23- white-red, #24- brown-red, #25- white-black, #26- brown-black, #27- gray-green, #28- yellow-gray, #29- pink-green, #30- yellow-pink, #31- green-blue, #32- yellow-blue



Possible on request:

- 20 AWG or 19 AWG

Continuous Flex Cables for Greenhouses

S 200

Continuous flex halogen-free polyurethane control cable with extreme temperature range



BRÖCKSKES · D-VIERSEN · S 200 12 x 1.5 mm² CE

Marking for S 200 7741215:

SAB BRÖCKSKES · D-VIERSEN · S 200 12 x 1.5 mm² CE



Construction:

Conductor:	bare copper strands acc. to IEC 60228, VDE 0295, class 6
Insulation:	TPE
Color code:	black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334, green/yellow ground from 3 conductors
Stranding:	specially adjusted layering with non-woven tape over each layer
Wrapping:	non-woven tape
Jacket material:	PUR, TMPU acc. to EN 50363-3 + VDE 0207-363-3-10-2 with matte surface
Jacket color:	gray (RAL 7000)

Outstanding features:



- free from paint wetting impairment substances (PWIS-free)
- flexible at low temperatures
- halogen-free
- travel > 10 m is possible
- high abrasion resistance
- minimal bending radius
- small outer diameter

Technical data:

Nominal voltage:	Uo/U 300/500 V
Testing voltage:	conductor/conductor: 2000 V
Min. bending radius: <i>continuously flexing:</i>	7.5 x O.D.
Radiation resistance:	1×10^7 cJ/kg
Temperature range: <i>static:</i>	-50/+90°C
<i>flexing:</i>	-40/+90°C
Halogen-free:	acc. to IEC 60754-1 + VDE 0482-754-1
Oil resistance:	very good - TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Chemical resistance:	good against acids, alkalines, solvents, hydraulic liquids etc.
Continuous flexibility:	very good
Weather resistance:	very good
Approvals:	CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 20 AWG (≈ 28/34) • 0.50 mm²			
7740205	2	0.193	4.9
7740305	3	0.201	5.1
7740405	4	0.217	5.5
7740505	5	0.236	6.0
7740705	7	0.272	6.9
7741205	12	0.327	8.3
7741805	18	0.390	9.9
7742505	25	0.469	11.9
7743605	36	0.539	13.7
7745005	50	0.634	16.1
7746505	65	0.717	18.2
► 19 AWG (≈ 42/34) • 0.75 mm²			
7740207	2	0.213	5.4
7740307	3	0.224	5.7
7740407	4	0.240	6.1
7740507	5	0.264	6.7
7740707	7	0.311	7.9
7741207	12	0.378	9.6
7741807	18	0.445	11.3
7742507	25	0.547	13.9
7743607	36	0.606	15.4
7745007	50	0.724	18.4
7746507	65	0.819	20.8

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 18 AWG (≈ 56/34) • 1.00 mm²			
7740210	2	0.228	5.8
7740310	3	0.240	6.1
7740410	4	0.260	6.6
7740510	5	0.283	7.2
7740710	7	0.339	8.6
7741210	12	0.409	10.4
7741810	18	0.484	12.3
7742510	25	0.594	15.1
7743610	36	0.669	17.0
7745010	50	0.799	20.3
7746510	65	0.902	22.9

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 16 AWG (≈ 84/34) • 1.50 mm²			
7740115	1	0.157	4.0
7740215	2	0.252	6.4
7740315	3	0.264	6.7
7740415	4	0.287	7.3
7740515	5	0.315	8.0
7740715	7	0.378	9.6
7741215	12	0.465	11.8
7741815	18	0.559	14.2
7742515	25	0.673	17.1
7743615	36	0.760	19.3
7745015	50	0.906	23.0
7746515	65	1.024	26.0

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 14 AWG (≈ 140/34) • 2.50 mm²			
7740125	1	0.185	4.7
7740225	2	0.307	7.8
7740325	3	0.327	8.3
7740425	4	0.362	9.2
7740525	5	0.402	10.2
7740725	7	0.480	12.2
7741225	12	0.606	15.4
7741825	18	0.713	18.1
7742525	25	0.870	22.1
7743625	36	0.976	24.8
7740740	7	0.575	14.6

continued on next page

7746507

Continuous Flex Cables for Greenhouses

S 200

Continuous flex halogen-free polyurethane control cable with extreme temperature range



S 200 BRÖCKSKES · D-VIERSEN · S 200 1 x 10.0 mm² CE

Marking for S 200 7740161:

SAB BRÖCKSKES · D-VIERSEN · S 200 1 x 10.0 mm² CE



Marking for S 200 7741215:

SAB BRÖCKSKES · D-VIERSEN · S 200 12 x 1.5 mm² CE

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 10 AWG (≈ 186/32) • 6.00 mm²			
7740160	1	0.240	6.1
7740260	2	0.425	10.8
7740360	3	0.461	11.7
7740460	4	0.504	12.8
7740560	5	0.571	14.5
7740760	7	0.681	17.3
► 8 AWG (≈ 320/32) • 10.00 mm²			
7740161	1	0.280	7.1
7740361	3	0.555	14.1
7740461	4	0.622	15.8
7740561	5	0.677	17.2
► 6 AWG (≈ 504/32) • 16.00 mm²			
7740162	1	0.327	8.3
7740362	3	0.669	17.0
7740462	4	0.748	19.0
7740562	5	0.835	21.2
			659

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 4 AWG (≈ 760/32) • 25.00 mm²			
7740163	1	0.390	9.9
7740363	3	0.811	20.6
7740463	4	0.898	22.8
7740563	5	1.000	25.4
► 2 AWG (≈ 1083/32) • 35.00 mm²			
7740164	1	0.453	11.5
7740464	4	1.039	26.4
7740564	5	1.173	29.8
► 1 AWG (≈ 703/28) • 50.00 mm²			
7740165	1	0.551	14.0
7740465	4	1.252	31.8
► 2/0 AWG (≈ 988/28) • 70.00 mm²			
7740166	1	0.657	16.7
► 3/0 AWG (≈ 1340/28) • 95.00 mm²			
7740167	1	0.807	20.5
			691


item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 4/0 AWG (≈ 1680/28) • 120.00 mm²			
7740168	1	0.846	21.5
► 250 MCM (≈ 2122/28) • 150.00 mm²			
7740169	1	0.969	24.6
► 350 MCM (≈ 1472/28) • 185.00 mm²			
7740170	1	1.051	26.7
► 450 MCM (≈ 1910/28) • 240.00 mm²			
7740171	1	1.185	30.1
			1668

Other dimensions and colors are available on request

Continuous Flex Cables for Greenhouses

SD 200 C

Continuous flex halogen-free polyurethane shielded data cable with extreme temperature range



D-VIERSEN · SD 200 C 25 x 0.14 mm² CE



Marking for SD 200 C 7842501:

SAB BRÖCKSKES · D-VIERSEN · SD 200 C 25 x 0.14 mm² CE



Construction:

Conductor:	bare copper strands, extra fine wires
Insulation:	TPE
Color code:	DIN 47100, see below
Stranding:	specially adjusted layering with non-woven tape over each layer
Wrapping:	non-woven tape
Shielding:	tinned copper braiding
Wrapping:	non-woven tape
Jacket material:	PUR, TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2 with matte surface
Jacket color:	grayish tan (RAL 7032)

Outstanding features:



- free from paint wetting impairment substances (PWIS-free)
- flexible at low temperatures
- halogen-free
- travel >10 m is possible
- good EMC characteristics
- high abrasion resistance

Technical data:

Peak operating voltage:	max. 350 V acc. to VDE 0812
Testing voltage:	conductor/conductor: 1500 V conductor/shielding: 1200 V
Min. bending radius: <i>continuously flexing:</i>	7.5 x O.D.
Radiation resistance:	1 x 10 ⁷ cJ/kg
Temperature range: <i>static:</i>	DIN VDE -50/+90°C
	<i>flexing:</i> -40/+90°C
Halogen-free:	acc. to IEC 60754-1 + VDE 0482-754-1
Oil resistance:	very good - TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Chemical resistance:	good against acids, alkalines, solvents, hydraulic liquids etc.
Continuous flexibility:	very good
Weather resistance:	very good
Approvals:	CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft	
► 26 AWG (≈ 18/38) • 0.14 mm²				
7840201	2	0.130	3.3	11
7840301	3	0.142	3.6	13
7840401	4	0.154	3.9	16
7840501	5	0.161	4.1	17
7840701	7	0.185	4.7	24
7841001	10	0.226	5.7	30
7841201	12	0.232	5.9	32
7841801	18	0.256	6.5	42
7842501	25	0.299	7.6	54
7843201	32	0.319	8.1	65

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft	
► 24 AWG (≈ 32/38) • 0.25 mm²				
7840202	2	0.150	3.8	13
7840302	3	0.157	4.0	16
7840402	4	0.165	4.2	19
7840502	5	0.181	4.6	23
7840702	7	0.205	5.2	32
7841002	10	0.244	6.2	38
7841202	12	0.252	6.4	44
7841402	14	0.268	6.8	51
7841802	18	0.287	7.3	59
7842502	25	0.346	8.8	79
7843202	32	0.366	9.3	95

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft	
► 22 AWG (≈ 42/38) • 0.34 mm²				
7840203	2	0.165	4.2	17
7840303	3	0.173	4.4	21
7840403	4	0.185	4.7	24
7840503	5	0.197	5.0	28
7840703	7	0.224	5.7	36
7841203	12	0.264	6.7	50
7841803	18	0.307	7.8	71
7842503	25	0.370	9.4	95
7843203	32	0.402	10.2	122

Other dimensions and colors are available on request


DIN 47100 color code:

#1- white, #2- brown, #3- green, #4- yellow, #5- gray, #6- pink, #7- blue, #8- red, #9- black, #10- violet, #11- gray-pink, #12- red-blue, #13- white-green, #14- brown-green, #15- white-yellow, #16- yellow-brown, #17- white-gray, #18- gray-brown, #19- white-pink, #20- pink-brown, #21- white-blue, #22- brown-blue, #23- white-red, #24- brown-red, #25- white-black, #26- brown-black, #27- gray-green, #28- yellow-gray, #29- pink-green, #30- yellow-pink, #31- green-blue, #32- yellow-blue

Continuous Flex Cables for Greenhouses

S 200 C

Continuous flex halogen-free polyurethane shielded control cable
with extreme temperature range



BRÖCKSKES · D-VIERSEN · S 200 C 12 x 1.5 mm² CE

Marking for S 200 C 7841215:

SAB BRÖCKSKES · D-VIERSEN · S 200 C 12 x 1.5 mm² CE



Construction:

Conductor:	bare copper strands acc. to IEC 60228, VDE 0295, class 6
Insulation:	TPE
Color code: from 2 conductors	black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334, green/yellow ground from 3 conductors
Stranding:	specially adjusted layering with non-woven tape over each layer
Inner jacket:	SABIX®
Wrapping:	non-woven tape
Shielding:	tinned copper braiding
Wrapping:	non-woven tape
Jacket material:	PUR, TMPU acc. to EN 50363-3 + VDE 0207-363-3-10-2 with matte surface
Jacket color:	gray (RAL 7000)

Outstanding features:

- free from paint wetting impairment substances (PWIS-free)
- flexible at low temperatures
- halogen-free
- travel > 10 m is possible
- good EMC characteristics
- high abrasion resistance
- minimal bending radius
- small outer diameter

Technical data:

Nominal voltage:	Uo/U 300/500 V
Testing voltage:	conductor/conductor: 2000 V conductor/shielding: 2000 V
Min. bending radius: continuously flexing:	7.5 x O.D.
Radiation resistance:	1 x 10 ⁷ cJ/kg
Temperature range: static:	-50/+90°C
flexing:	-40/+90°C
Halogen-free:	acc. to IEC 60754-1 + VDE 0482-754-1
Oil resistance:	very good - TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Chemical resistance:	good against acids, alkalines, solvents, hydraulic liquids etc.
Continuous flexibility:	very good
Weather resistance:	very good
Approvals:	CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no. no. of conductors incl. ground outer-Ø ±10% inch cable weight ≈lbs/mft

► 20 AWG (≈ 28/34) • 0.50 mm²

7840205	2	0.268	6.8	37
7840305	3	0.276	7.0	42
7840405	4	0.291	7.4	48
7840505	5	0.311	7.9	56
7840705	7	0.354	9.0	73
7841205	12	0.417	10.6	102
7841805	18	0.480	12.2	144
7842505	25	0.583	14.8	206
7843605	36	0.646	16.4	255
7845205	52	0.756	19.2	352
7846505	65	0.854	21.7	435

► 19 AWG (≈ 42/34) • 0.75 mm²

7840207	2	0.287	7.3	43
7840307	3	0.299	7.6	50
7840407	4	0.315	8.0	58
7840507	5	0.346	8.8	71
7840707	7	0.386	9.8	87
7841207	12	0.469	11.9	137
7841807	18	0.559	14.2	198
7842507	25	0.654	16.6	259
7843607	36	0.736	18.7	349
7845207	52	0.862	21.9	488
7846507	65	0.965	24.5	583

item no. no. of conductors incl. ground outer-Ø ±10% inch cable weight ≈lbs/mft

► 18 AWG (≈ 56/34) • 1.00 mm²

7840210	2	0.303	7.7	48
7840310	3	0.315	8.0	58
7840410	4	0.335	8.5	66
7840510	5	0.366	9.3	81
7840710	7	0.421	10.7	117
7841210	12	0.504	12.8	167
7841810	18	0.598	15.2	248
7842510	25	0.724	18.4	334
7843610	36	0.799	20.3	441
7845210	52	0.937	23.8	612
7846510	65	1.055	26.8	759

► 16 AWG (≈ 84/34) • 1.50 mm²

7840115	1	0.181	4.6	24
7840215	2	0.327	8.3	58
7840315	3	0.339	8.6	71
7840415	4	0.370	9.4	88
7840515	5	0.398	10.1	100
7840715	7	0.469	11.9	141
7841215	12	0.579	14.7	236
7841815	18	0.665	16.9	325
7842515	25	0.803	20.4	439
7843615	36	0.906	23.0	597
7845215	52	1.059	26.9	799
7846515	65	1.177	29.9	1017

item no. no. of conductors incl. ground outer-Ø ±10% inch cable weight ≈lbs/mft

► 14 AWG (≈ 140/34) • 2.50 mm²

7840125	1	0.209	5.3	33
7840225	2	0.390	9.9	82
7840325	3	0.417	10.6	111
7840425	4	0.453	11.5	137
7840525	5	0.496	12.6	167
7840725	7	0.591	15.0	245
7841225	12	0.728	18.5	364
7841825	18	0.850	21.6	515
7842525	25	1.024	26.0	696
7843625	36	1.130	28.7	934
7845225	52	1.299	33.0	1250

► 12 AWG (≈ 224/34) • 4.00 mm²

7840140	1	0.232	5.9	45
7840240	2	0.457	11.6	122
7840340	3	0.476	12.1	151
7840440	4	0.539	13.7	201
7840540	5	0.591	15.0	240
7840740	7	0.709	18.0	357

continued on next page

Continuous Flex Cables for Greenhouses

S 200 C

Continuous flex halogen-free polyurethane shielded control cable
with extreme temperature range



Marking for S 200 C 7840161:

SAB BRÖCKSKES · D-VIERSEN · S 200 C 1 x 10.0 mm² CE



Marking for S 200 C 7841215:

SAB BRÖCKSKES · D-VIERSEN · S 200 C 12 x 1.5 mm² CE

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 10 AWG (≈ 186/32) • 6.00 mm²			
7840160	1	0.260	6.6
7840260	2	0.539	13.7
7840360	3	0.575	14.6
7840460	4	0.626	15.9
7840560	5	0.709	18.0
7840760	7	0.811	20.6
► 8 AWG (≈ 320/32) • 10.00 mm²			
7840161	1	0.303	7.7
7840361	3	0.685	17.4
7840461	4	0.744	18.9
7840561	5	0.807	20.5
► 6 AWG (≈ 504/32) • 16.00 mm²			
7840162	1	0.358	9.1
7840362	3	0.815	20.7
7840462	4	0.886	22.5
7840562	5	0.972	24.7
			740

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 4 AWG (≈ 760/32) • 25.00 mm²			
7840163	1	0.421	10.7
7840363	3	0.941	23.9
7840463	4	1.016	25.8
7840563	5	1.146	29.1
► 2 AWG (≈ 1083/32) • 35.00 mm²			
7840164	1	0.492	12.5
7840464	4	1.185	30.1
7840564	5	1.303	33.1
► 1 AWG (≈ 703/28) • 50.00 mm²			
7840165	1	0.591	15.0
7840465	4	1.398	35.5
► 2/0 AWG (≈ 988/28) • 70.00 mm²			
7840166	1	0.693	17.6
► 3/0 AWG (≈ 1340/28) • 95.00 mm²			
7840167	1	0.846	21.5
			765


item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 4/0 AWG (≈ 1680/28) • 120.00 mm²			
7840168	1	0.894	22.7
► 250 MCM (≈ 2122/28) • 150.00 mm²			
7840169	1	1.031	26.2
► 350 MCM (≈ 1472/26) • 185.00 mm²			
7840170	1	1.008	25.6
► 450 MCM (≈ 1910/26) • 240.00 mm²			
7840171	1	1.232	31.3

Other dimensions and colors are available on request

Continuous Flex Cables for Greenhouses

SD 200 C TP

Continuous flex halogen-free twisted pairs shielded polyurethane data cable
with extreme temperature range



VIERSEN · SD 200 C TP 3 x 2 x 0.5 mm² CE

Marking for SD 200 C TP 7890350:
SAB BRÖCKSKES · D-VIERNSEN · SD 200 C TP 3 x 2 x 0.5 mm² CE



Construction:

Conductor:	bare copper strands, extra fine wires
Insulation:	TPE
Color code:	DIN 47100, see below
Stranding:	conductors twisted to pairs, pairs twisted in specially adjusted layering with non-woven tape over each layer
Wrapping:	non-woven tape
Shielding:	tinned copper braiding
Wrapping:	non-woven tape
Jacket material:	PUR, TMPU acc. to EN50363-10-2 + VDE 0207-363-10-2 with matte surface
Jacket color:	grayish tan (RAL 7032)

Outstanding features:



- free from paint wetting impairment substances (PWIS-free)
- flexible at low temperatures
- halogen-free
- travel > 10 m is possible
- good EMC characteristics
- high abrasion resistance

Technical data:

Peak operating voltage:	max. 350 V acc. to VDE 0812
Testing voltage:	conductor/conductor: 1500 V conductor/shielding: 1200 V
Min. bending radius: <i>continuously flexing:</i>	7.5 x O.D.
Radiation resistance:	1 x 10 ⁷ cJ/kg
Temperature range: <i>static:</i>	DIN VDE -50/+90°C
<i>flexing:</i>	-40/+90°C
Halogen-free:	acc. to IEC 60754-1 + VDE 0482-754-1
Oil resistance:	very good - TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Chemical resistance:	good against acids, alkalines, solvents, hydraulic liquids, etc.
Continuous flexibility	very good
Weather resistance:	very good
Approvals:	CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no.	no. of pairs	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 26 AWG (≈ 18/38) • 0.14 mm²			
7890214	2	0.173	4.4
7890314	3	0.193	4.9
7890414	4	0.220	5.6
7890514	5	0.236	6.0
7890614	6	0.252	6.4
7890714	7	0.264	6.7
7891014	10	0.311	7.9
7891414	14	0.354	9.0
7891814	18	0.394	10.0
7892514	25	0.461	11.7
► 24 AWG (≈ 32/38) • 0.25 mm²			
7890225	2	0.193	4.9
7890325	3	0.217	5.5
7890425	4	0.252	6.4
7890525	5	0.272	6.9
7890625	6	0.280	7.1
7890725	7	0.291	7.4
7891025	10	0.350	8.9
7891425	14	0.429	10.9
7891825	18	0.457	11.6
7892525	25	0.543	13.8

item no.	no. of pairs	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 22 AWG (≈ 42/38) • 0.34 mm²			
7890234	2	0.205	5.2
7890334	3	0.228	5.8
7890434	4	0.272	6.9
7890534	5	0.291	7.4
7890734	7	0.315	8.0
7891034	10	0.378	9.6
7891434	14	0.457	11.6
7891834	18	0.492	12.5
7892534	25	0.579	14.7
► 20 AWG (≈ 28/34) • 0.50 mm²			
7890250	2	0.248	6.3
7890350	3	0.272	6.9
7890450	4	0.311	7.9
7890550	5	0.346	8.8
7890750	7	0.370	9.4
7891050	10	0.445	11.3
7891450	14	0.531	13.5
7891850	18	0.579	14.7
7892550	25	0.669	17.0

item no.	no. of pairs	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 19 AWG (≈ 42/34) • 0.75 mm²			
7890275	2	0.283	7.2
7890375	3	0.311	7.9
7890475	4	0.350	8.9
7890575	5	0.409	10.4
7890775	7	0.457	11.6
7891075	10	0.531	13.5
7891475	14	0.634	16.1
7891875	18	0.681	17.3
7892575	25	0.791	20.1

Other dimensions and colors are available on request

DIN 47100 color code:

#1- white/brown, #2- green/yellow, #3- gray/pink, #4- blue/red, #5- black/purple, #6- gray-pink/red-blue, #7- white-green/brown-green, #8- white-yellow/yellow-brown, #9- white-gray/gray-brown, #10- white-pink/pink-brown, #11- white-blue/brown-blue, #12- white-red/brown-red, #13- white-black/brown-black, #14- gray-green/yellow-gray, #15- pink-green/yellow-pink, #16- green-blue/yellow-blue, #17- green-red/yellow-red, #18- green-black/yellow-black, #19- gray-blue/pink-blue, #20- gray-red/pink-red, #21- gray-black/pink-black, #22- blue-black, red-black, #23- white/brown, #24- green/yellow, #25- gray/pink, #26- blue/red

Continuous Flex Cables for Greenhouses

SD 980 P

High speed continuous flex heavy duty halogen-free polyurethane data cable



300V CSA AWM I/II A/B 80°C 300V FT1 FT2 CE



Marking for SD 980 P 77742625:

SAB BRÖCKSKES · D-VIERSEN · 77742501 25 x 0.14 mm² SD 980 P 26 AWG/25c 77742625 AWM Style 21198 80°C 300V CSA AWM I/II A/B 80°C 300V FT1 FT2 CE

Construction:

Conductor:	bare copper strands, extra fine wires
Insulation:	TPE
Color code:	DIN 47100, see below
Stranding:	specially adjusted layering with non-woven tape over each layer and one additional non-woven tape over the outer layer
Jacket material:	PUR, TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2 with matte surface
Jacket color:	grayish tan (RAL 7032)

Outstanding features:

- halogen-free
- free from paint wetting impairment substances (PWIS-free)
- flexible at low temperatures
- travel > 10 m is possible
- high abrasion resistance
- minimal bending radius

Technical data:

Peak operating voltage:	max. 350 V
Voltage UL/CSA:	300 V
Testing voltage:	conductor/conductor: 2000 V
Min. bending radius: <i>continuously flexing:</i>	7.5 x O.D.
Radiation resistance:	5 x 10 ⁷ cJ/kg
Temperature range: <i>static:</i>	DIN VDE -50/+90°C
<i>flexing:</i>	UL/CSA: up to +80°C -40/+90°C
Halogen-free:	acc. to IEC 60754-1 + VDE 0482-754-1
Burning characteristics:	flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, CSA FT1 (acc.to dimension), FT2
Oil resistance:	very good - TMPU acc. to IEC 50363-10-2 + VDE 0207-363-10-2
Chemical resistance:	good against acids, alkalines, solvents, hydraulic liquids, etc.
Continuous flexibility:	very good
Approvals:	UR AWM, CSA AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 26 AWG (≈ 18/38) • 0.14 mm²			
77742603	3	0.150	3.8
77742604	4	0.161	4.1
77742605	5	0.177	4.5
77742607	7	0.193	4.9
77742610	10	0.220	5.6
77742614	14	0.236	6.0
77742618	18	0.260	6.6
77742625	25	0.299	7.6
			48

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 24 AWG (≈ 32/38) • 0.25 mm²			
77742403	3	0.165	4.2
77742404	4	0.173	4.4
77742405	5	0.189	4.8
77742407	7	0.213	5.4
77742410	10	0.244	6.2
77742414	14	0.260	6.6
77742418	18	0.287	7.3
77742425	25	0.339	8.6
			69

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 22 AWG (≈ 42/38) • 0.34 mm²			
77742203	3	0.173	4.4
77742204	4	0.185	4.7
77742205	5	0.205	5.2
77742207	7	0.228	5.8
77742210	10	0.260	6.6
77742214	14	0.280	7.1
77742218	18	0.307	7.8
77742225	25	0.362	9.2
			83

Other dimensions and colors are available on request

DIN 47100 color code:

#1- white, #2- brown, #3- green, #4- yellow, #5- gray, #6- pink, #7- blue, #8- red, #9- black, #10- violet, #11- gray-pink, #12- red-blue, #13- white-green, #14- brown-green, #15- white-yellow, #16- yellow-brown, #17- white-gray, #18- gray-brown, #19- white-pink, #20- pink-brown, #21- white-blue, #22- brown-blue, #23- white-red, #24- brown-red, #25- white-black



Possible on request:

- colored conductors acc. to US 2
- 20 AWG & 19 AWG

Continuous Flex Cables for Greenhouses

S 980 P

High speed continuous flex heavy duty halogen-free polyurethane control cable



80°C 600V CSA AWM I/II A/B 80°C 600V FT1 FT2 CE



Marking for S 980 P 77742012:

SAB BRÖCKSKES · D-VIERSEN · 77741205 S 980 P 12 x 0.50 mm² 20 AWG/12c 77742012 AWM Style 21060 80°C 600V CSA AWM I/II A/B 80°C 600V FT1 FT2 CE

Construction:

Conductor:	bare copper strands acc. to IEC 60228, VDE 0295, class 6
Insulation:	TPE
Color code:	black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334, green/yellow ground from 3 conductors
Stranding:	specially adjusted layering with non-woven tape over each layer and one additional non-woven tape over the outer layer
Jacket material:	PUR, TMPU acc. to EN 50363-3 + VDE 0207-363-3-10-2 with matte surface
Jacket color:	gray (RAL 7000)

Outstanding features:



- halogen-free
- free from paint wetting impairment substances (PWIS-free)
- flexible at low temperatures
- travel > 10 m is possible
- high abrasion resistance
- minimal bending radius

Technical data:

Nominal voltage:	Uo/U 300/500 V
Voltage UL/CSA:	600 V
Testing voltage:	conductor/conductor: 2000 V
Min. bending radius: continuously flexing:	7.5 x O.D.
Radiation resistance:	5 x 10 ⁷ cJ/kg
Temperature range: static:	DIN VDE -50/+90°C UL/CSA: up to +80°C
flexing:	-40/+90°C
Halogen-free:	acc. to IEC 60754-1 + VDE 0482-754-1
Burning characteristics:	flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, CSA FT1, FT2
Oil resistance:	very good - TMPU acc. to IEC 50363-10-2 + VDE 0207-363-10-2
Chemical resistance:	good against acids, alkalines, solvents, hydraulic liquids, etc.
Continuous flexibility:	very good
Approvals:	UR AWM, CSA AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 20 AWG (≈ 28/34) • 0.50 mm²			
77742003	3	0.260	6.6
77742004	4	0.280	7.1
77742005	5	0.307	7.8
77742007	7	0.350	8.9
77742012	12	0.413	10.5
77742018	18	0.476	12.1
77742025	25	0.563	14.3
► 19 AWG (≈ 42/34) • 0.75 mm²			
77741903	3	0.280	7.1
77741904	4	0.299	7.6
77741905	5	0.331	8.4
77741907	7	0.378	9.6
77741912	12	0.441	11.2
77741918	18	0.524	13.3
77741925	25	0.618	15.7
► 18 AWG (≈ 56/34) • 1.00 mm²			
77741803	3	0.287	7.3
77741804	4	0.311	7.9
77741805	5	0.339	8.6
77741807	7	0.394	10.0
77741812	12	0.461	11.7
77741818	18	0.539	13.7
77741825	25	0.642	16.3
► 16 AWG (≈ 84/34) • 1.50 mm²			
77741603	3	0.315	8.0
77741604	4	0.350	8.9
77741605	5	0.370	9.4
77741607	7	0.429	10.9
77741612	12	0.512	13.0
77741618	18	0.563	14.3
77741625	25	0.720	18.3
► 14 AWG (≈ 140/34) • 2.50 mm²			
77741403	3	0.366	9.3
77741404	4	0.394	10.0
77741405	5	0.437	11.1
77741407	7	0.504	12.8
77741412	12	0.618	15.7
77741418	18	0.732	18.6
77741425	25	0.925	23.5
► 12 AWG (≈ 224/34) • 4.00 mm²			
77741203	3	0.413	10.5
77741204	4	0.453	11.5
77741205	5	0.496	12.6
► 10 AWG (≈ 186/32) • 6.00 mm²			
77741003	3	0.480	12.2
77741004	4	0.524	13.3
77741005	5	0.575	14.6

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 8 AWG (≈ 320/32) • 10.00 mm²			
77740803	3	0.622	15.8
77740804	4	0.685	17.4
77740805	5	0.768	19.5
► 6 AWG (≈ 504/32) • 16.00 mm²			
77740603	3	0.732	18.6
77740604	4	0.811	20.6
77740605	5	0.965	24.5
► 4 AWG (≈ 760/32) • 25.00 mm²			
77740404	4	1.024	26.0
77740405	5	1.138	28.9
► 2 AWG (≈ 1083/32) • 35.00 mm²			
77740204	4	1.161	29.5
77740205	5	1.291	32.8
► 1 AWG (≈ 703/28) • 50.00 mm²			
77740104	4	1.425	36.2
Other dimensions and colors are available on request			



Possible on request:

- with blue, red or white conductors

Continuous Flex Cables for Greenhouses

SD 980 CP

High speed continuous flex heavy duty shielded halogen-free polyurethane data cable



CSA AWM I/II A/B 80°C 300V FT1 FT2 CE



Marking for SD 980 CP 77842625:

SAB BRÖCKSKES · D-VIERSEN · 77842501 25 x 0.14 mm² SD 980 CP 26 AWG/25c 77842625 UL AWM Style 21198 80°C 300V CSA AWM I/II A/B 80°C 300V FT1 FT2 CE

Construction:

Conductor:	bare copper strands, extra fine wires
Insulation:	TPE
Color code:	DIN 47100, see below
Stranding:	specially adjusted layering with non-woven tape over each layer
Shielding:	tinned copper braiding
Wrapping:	non-woven tape
Jacket material:	PUR, TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2 with matte surface
Jacket color:	grayish tan (RAL 7032)

Outstanding features:



- free from paint wetting impairment substances (PWIS-free)
- flexible at low temperatures
- halogen-free
- travel >10 m is possible
- good EMC characteristics
- high abrasion resistance

Technical data:

Peak operating voltage:	max. 350 V
Voltage UL/CSA:	300 V
Testing voltage:	conductor/conductor: 2000 V conductor/shielding: 2000V
Min. bending radius: <i>continuously flexing:</i>	7.5 x O.D.
Radiation resistance:	5 x 10 ⁷ cJ/kg
Temperature range: <i>static:</i>	DIN VDE -50/+90°C
	UL/CSA: up to +80°C
	-40/+90°C
flexing:	
Halogen-free:	acc. to IEC 60754-1 + VDE 0482-754-1
Burning characteristics:	flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, CSA FT1 (acc. to dimension), FT2
Oil resistance:	very good - TMPU acc. to IEC 50363-10-2 + VDE 0207-363-10-2
Chemical resistance:	good against acids, alkalines, solvents, hydraulic liquids, etc.
Continuous flexibility:	very good
Approvals:	UR AWM, CSA AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 26 AWG (≈ 18/38) • 0.14 mm²				
77842603	3	0.165	4.2	16
77842604	4	0.177	4.5	18
77842605	5	0.193	4.9	22
77842607	7	0.209	5.3	26
77842610	10	0.236	6.0	32
77842614	14	0.252	6.4	37
77842618	18	0.276	7.0	46
77842625	25	0.315	8.0	59

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 24 AWG (≈ 32/38) • 0.25 mm²				
77842403	3	0.181	4.6	19
77842404	4	0.189	4.8	22
77842405	5	0.205	5.2	27
77842407	7	0.228	5.8	32
77842410	10	0.260	6.6	41
77842414	14	0.276	7.0	51
77842418	18	0.307	7.8	61
77842425	25	0.354	9.0	81

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 22 AWG (≈ 42/38) • 0.34 mm²				
77842203	3	0.189	4.8	22
77842204	4	0.201	5.1	26
77842205	5	0.220	5.6	30
77842207	7	0.244	6.2	37
77842210	10	0.276	7.0	48
77842214	14	0.295	7.5	60
77842218	18	0.323	8.2	73
77842225	25	0.378	9.6	95

Other dimensions and colors are available on request

DIN 47100 color code:

#1- white, #2- brown, #3- green, #4- yellow, #5- gray, #6- pink, #7- blue, #8- red, #9- black, #10- violet, #11- gray-pink, #12- red-blue, #13- white-green, #14- brown-green, #15- white-yellow, #16- yellow-brown, #17- white-gray, #18- gray-brown, #19- white-pink, #20- pink-brown, #21- white-blue, #22- brown-blue, #23- white-red, #24- brown-red, #25- white-black



Possible on request:

- with colored conductors acc. to US 2
- 20 AWG & 19 AWG

Continuous Flex Cables for Greenhouses

S 980 CP

High speed continuous flex heavy duty shielded halogen-free polyurethane control cable



Marking for S 980 CP 77842012:

SAB BRÖCKSKES · D-VIERSEN · 77841205 x 0.5 mm² S 980 CP 20 AWG/7c 77842012 AWM Style 21060 80°C 600V CSA AWM I/II A/B 80°C 600V FT1 FT2 CE

Construction:

Conductor:	bare copper strands acc. to IEC 60228, VDE 0295, class 6
Insulation:	TPE
Color code:	black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334, green/yellow ground from 3 conductors
Stranding:	specially adjusted layering with non-woven tape over each layer
Inner jacket:	special SABIX®
Wrapping:	non-woven tape
Shielding:	tinned copper braiding
Wrapping:	non-woven tape
Jacket material:	PUR, TMPU acc. to EN 50363-3 + VDE 0207-363-3-10-2 with matte surface
Jacket color:	gray (RAL 7000)

Outstanding features:

- free from paint wetting impairment substances (PWIS-free)
- flexible at low temperatures
- travel > 10 m is possible
- good EMC characteristics
- high abrasion resistance
- small bending radius

Technical data:

Nominal voltage:	Uo/U 300/500 V
Voltage UL/CSA:	600 V
Testing voltage:	conductor/conductor: 2000 V conductor/shielding: 2000 V
Min. bending radius: continuously flexing:	7.5 x O.D.
Radiation resistance:	5 x 10 ⁷ cJ/kg
Temperature range: static:	DIN VDE -50/+90°C
flexing:	UL/CSA: up to +80°C -40/+90°C
Halogen-free:	acc. to IEC 60754-1 + VDE 0482-754-1
Burning characteristics:	flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, CSA FT1, FT2
Oil resistance:	very good - TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Chemical resistance:	good against acids, alkalines, solvents, hydraulic liquids etc.
Continuous flexibility:	very good
Approvals:	UR AWM, CSA AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
----------	--------------------------------	-------------------	-----------------------

► 20 AWG (≈ 28/34) • 0.50 mm²

77842003	3	0.339	8.6	58
77842004	4	0.354	9.0	66
77842005	5	0.382	9.7	75
77842007	7	0.425	10.8	92
77842012	12	0.496	12.6	137
77842018	18	0.579	14.7	192
77842025	25	0.673	17.1	255

► 19 AWG (≈ 42/34) • 0.75 mm²

77841903	3	0.354	9.0	65
77841904	4	0.374	9.5	74
77841905	5	0.406	10.3	85
77841907	7	0.461	11.7	116
77841912	12	0.543	13.8	171
77841918	18	0.630	16.0	238
77841925	25	0.736	18.7	306

► 18 AWG (≈ 56/34) • 1.00 mm²

77841803	3	0.362	9.2	71
77841804	4	0.386	9.8	82
77841805	5	0.413	10.5	95
77841807	7	0.476	12.1	129
77841812	12	0.559	14.2	201
77841818	18	0.634	16.1	269
77841825	25	0.760	19.3	350

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
----------	--------------------------------	-------------------	-----------------------

► 16 AWG (≈ 84/34) • 1.50 mm²

77841603	3	0.374	9.5	80
77841604	4	0.425	10.8	102
77841605	5	0.453	11.5	127
77841607	7	0.520	13.2	168
77841612	12	0.618	15.7	258
77841618	18	0.709	18.0	346
77841625	25	0.909	23.1	521

► 14 AWG (≈ 140/34) • 2.50 mm²

77841403	3	0.449	11.4	123
77841404	4	0.476	12.1	146
77841405	5	0.528	13.4	175
77841407	7	0.610	15.5	248
77841412	12	0.736	18.7	376
77841418	18	0.921	23.4	566
77841425	25	1.071	27.2	725

► 12 AWG (≈ 224/34) • 4.00 mm²

77841203	3	0.496	12.6	167
77841204	4	0.543	13.8	205
77841205	5	0.598	15.2	251
77841207	7	0.650	17.0	321
77841212	12	0.810	20.0	500
77841218	18	0.960	23.0	650
77841225	25	1.110	27.0	800

► 10 AWG (≈ 186/32) • 6.00 mm²

77841003	3	0.579	14.7	234
77841004	4	0.622	15.8	294
77841005	5	0.681	17.3	334

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	cable weight ≈lbs/mft
----------	--------------------------------	-------------------	-----------------------

► 8 AWG (≈ 320/32) • 10.00 mm²

77840803	3	0.740	18.8	372
77840804	4	0.807	20.5	458
77840805	5	0.957	24.3	607

► 6 AWG (≈ 504/32) • 16.00 mm²

77840603	3	0.878	22.3	528
77840604	4	0.992	25.2	703
77840605	5	1.110	28.2	845

► 4 AWG (≈ 760/32) • 25.00 mm²

77840404	4	1.169	29.7	1011
77840405	5	1.283	32.6	1211

► 2 AWG (≈ 1083/32) • 35.00 mm²

77840204	4	1.307	33.2	1289
77840205	5	1.437	36.5	1545

Other dimensions and colors are available on request

Continuous Flex Cables for Greenhouses

SD 980 CP TP

High speed continuous flex twisted pairs heavy duty shielded halogen-free polyurethane data cable



A AWM I/I A/B 80°C 300V FT1 FT2 CE

Marking for SD 980 CP TP 77892403:

SAB BRÖCKSKES · D-VIERSEN · 77890325 3 x 2 x 0.25 mm² SD 980 CP TP 24 AWG/3pr 77892403 AWM Style 21198 80°C 300V CSA AWM I/I A/B 80°C 300V FT1 FT2 CE



Construction:

Conductor:	bare copper strands, extra fine wires
Insulation:	TPE
Color code:	DIN 47100, see below
Stranding:	conductors twisted to pairs, pairs twisted in specially adjusted layering with non-woven tape over each layer
Shielding:	tinned copper braiding
Wrapping:	non-woven tape
Jacket material:	PUR, TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2 with matte surface
Jacket color:	grayish tan (RAL 7032)

Outstanding features:

- free from paint wetting impairment substances (PWIS-free)
- flexible at low temperatures
- halogen-free
- travel >10 m is possible
- good EMC characteristics
- high abrasion resistance
- small bending radius

Technical data:

Peak operating voltage:	max. 350 V
Voltage UL/CSA:	300 V
Testing voltage:	conductor/conductor: 2000 V conductor/shielding: 2000 V
Min. bending radius: <i>continuously flexing:</i>	7.5 x O.D.
Radiation resistance:	5 x 10 ⁷ cJ/kg
Temperature range: <i>static:</i>	DIN VDE -50/+90°C
<i>flexing:</i>	UL/CSA: up to +80°C -40/+90°C
Halogen-free:	acc. to IEC 60754-1 + VDE 0482-754-1
Burning characteristics:	flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2, CSA FT1 (acc.to dimension), FT2
Oil resistance:	very good - TMPU acc. to IEC 50363-10-2 + VDE 0207-363-10-2
Chemical resistance:	good against acids, alkalines, solvents, hydraulic liquids, etc.
Continuous flexibility:	very good
Approvals:	UR AWM, CSA AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no.	no. of pairs	outer-Ø ±10% inch	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 26 AWG (≈ 18/38) • 0.14 mm²				
77892602	2	0.201	5.1	23
77892603	3	0.220	5.6	26
77892604	4	0.248	6.3	32
77892605	5	0.264	6.7	36
77892607	7	0.283	7.2	43
77892610	10	0.331	8.4	56
77892614	14	0.366	9.3	71
77892618	18	0.406	10.3	91
77892625	25	0.461	11.7	117
► 24 AWG (≈ 32/38) • 0.25 mm²				
77892402	2	0.220	5.6	28
77892403	3	0.244	6.2	35
77892404	4	0.272	6.9	40
77892405	5	0.291	7.4	46
77892407	7	0.311	7.9	57
77892410	10	0.362	9.2	74
77892414	14	0.429	10.9	105
77892418	18	0.457	11.6	126
77892425	25	0.551	14.0	185

item no.	no. of pairs	outer-Ø ±10% inch	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 22 AWG (≈ 42/38) • 0.34 mm²				
77892202	2	0.232	5.9	32
77892203	3	0.256	6.5	40
77892204	4	0.291	7.4	48
77892205	5	0.311	7.9	54
77892207	7	0.335	8.5	66
77892210	10	0.390	9.9	87
77892214	14	0.457	11.6	125
77892218	18	0.492	12.5	150
77892225	25	0.579	14.7	215
► 20 AWG (≈ 28/34) • 0.50 mm²				
77892002	2	0.268	6.8	40
77892003	3	0.299	7.6	53
77892004	4	0.343	8.7	66
77892005	5	0.370	9.4	76
77892007	7	0.406	10.3	99
77892010	10	0.476	12.1	132
77892014	14	0.563	14.3	189
77892018	18	0.634	16.1	244
77892025	25	0.709	18.0	309

item no.	no. of pairs	outer-Ø ±10% inch	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 19 AWG (≈ 42/34) • 0.75 mm²				
77891902	2	0.303	7.7	53
77891903	3	0.346	8.8	66
77891904	4	0.390	9.9	81
77891905	5	0.437	11.1	108
77891907	7	0.469	11.9	127
77891910	10	0.579	14.7	204
77891914	14	0.681	17.3	271
77891918	18	0.732	18.6	327
77891925	25	0.894	22.7	473

Other dimensions and colors are available on request

DIN 47100 color code:

#1- white/brown, #2- green/yellow, #3- gray/pink, #4- blue/red, #5- black/purple,
#6- gray-pink/red-blue, #7- white-green/brown-green, #8- white-yellow/yellow-brown,
#9- white-gray/gray-brown, #10- white-pink/pink-brown, #11- white-blue/brown-blue,
#12- white-red/brown-red, #13- white-black/brown-black, #14- gray-green/yellow-gray,
#15- pink-green/yellow-pink, #16- green-blue/yellow-blue, #17- green-red/yellow-red,
#18- green-black/yellow-black, #19- gray-blue/pink-blue, #20- gray-red/pink-red,
#21- gray-black/pink-black, #22- blue-black, red-black, #23- white/brown,
#24- green/yellow, #25- gray/pink



Possible on request:

- 20 AWG & 19 AWG
- with colored conductors acc. to US 3

CAT 5/5e Ethernet Cables for Greenhouses

PN 675 PVC Ethernet cable type B, for flexible applications, PLTC 600 V, CAT 5e

S PN 676 PUR Ethernet cable type C, continuous flex, CAT 5



(UL) TYPE CMR c(UL) TYPE CMG 75C or (UL) PLTC SUN RES OIL



Marking for S PN 676 6762404:

SAB BRÖCKSKES · D-VIERSEN · S PN 676 CAT 5 Type C 4x2x24AWG x AWM Style 21198 80°C 300V CSA AWM I/II A/B 80°C 300V FT2 CE

Construction:	PN 675 type B flexible	S PN 676 type C continuous flex
Item numbers:	6752202	6752204
Dimensions:	2 x 2 x 22 AWG	4 x 2 x 22 AWG
Conductor:	tinned copper strands, fine wires	tinned copper strands, fine wires
Insulation:	Polyolefin	PFA/PP
Color code:	orange & white/orange stripe green & white/green stripe	blue & white/blue stripe orange & white/orange stripe green & white/green stripe brown & white/brown stripe
Stranding:	in layers	in layers
Wrapping:	—	—
Shielding:	aluminum foil/polyester tape + 24 AWG (7/32) tinned copper drain wire	tinned copper braiding
Wrapping:	—	—
Jacket material:	PVC	PVC
Jacket color:	teal	teal
		green (similar RAL 6018)

Technical data:	PN 675 type B flexible	S PN 676 type C continuous flex
Approvals:	c(UL) CMG 75C, (UL) PLTC, (UL) AWM 2570 600V 80°C	UL, CSA
Peak operating voltage:	max. 350 V	max. 350 V
Voltage:	UL: 600 V	UL: 600 V
Testing voltage: conductor/conductor: conductor/shielding:	1500 V 1200 V	1500 V 1200 V
Min. bending radius: fixed installation: free movement: continuous flex:	5 x O.D. 10 x O.D. —	5 x O.D. 10 x O.D. —
Temperature range VDE: static: flexible:	UL: up to +80°C -40/+80°C -25/+80°C	UL: up to +80°C -40/+80°C -25/+80°C
Halogen-free:	—	—
Oil resistance:	oil resistance I	oil resistance I
UV resistance:	yes	yes
Characteristic impedance:	100Ω ± 15Ω (0.722-100.0 MHz)	100Ω ± 15Ω (0.722-100.0 MHz)
Transmission performance:	1 - 250 MHz	1 - 250 MHz
Absence of harmful substances:	acc. to RoHS directive of the European Union, see page O/30	

item no.	type	jacket color	dimensions AWG	outer-Ø inch	cable weight ≈lbs/mft	ohmic resistance at 20°C acc. to VDE 0812 max. Ω/km
► 6752202	PN 675	teal	22 (~ 7/30)/2pr	0.310	7.9	45
► 6752204	PN 675	teal	22 (~ 7/30)/4pr	0.330	8.4	59
► 6762404	S PN 676	green (similar RAL 6018)	24 (~ 19/36)/4pr	0.327	8.3	53
						145

Other dimensions and colors are available on request

Also possible as a
cable assembly with
M12 or RJ 45 plug



CAT 6/6A Ethernet Cables for Greenhouses

CATLine CAT 6 S / CAT 6A S

Gigabit Ethernet cable suitable for cable tracks

CATLine CAT 6 RT / CAT 6A RT

Gigabit Ethernet cable suitable for cable tracks,
suitable for robots

19 80°C 300V CSA AWM I/II A/B 80°C 300V FT2 CE



Marking for CATLine CAT 6 S 16774630:

SAB BRÖCKSKES · D-VIERSEN · **CATLine** Cat.6 S 4x2x26AWG 16774630 **UL** AWM Style 20549 80°C 300V CSA AWM I/II A/B 80°C 300V FT2 **CE**

Construction:	CATLine CAT 6 S suitable for cable tracks	CATLine CAT 6A S suitable for cable tracks	CATLine CAT 6 RT suitable for cable tracks/ suitable for robots	CATLine CAT 6A RT suitable for cable tracks/ suitable for robots
Item numbers:	16774630	16774631	16874630	16874631
Dimensions:	4 x 2 x 26 AWG			
Conductor:	bare copper strands, fine wires			
Insulation:	special polymer	special polymer	special polymer	special polymer
Color code:	white-blue/blue, white-orange/orange, white-green/green, white-brown/brown	white-blue/blue, white-orange/orange, white-green/green, white-brown/brown	white-blue/blue, white-orange/orange, white-green/green, white-brown/brown	white-blue/blue, white-orange/orange, white-green/green, white-brown/brown
Stranding:	conductors twisted to pairs, pairs together			
Wrapping:	non-woven tape	non-woven tape	non-woven tape	non-woven tape
Shielding:	alu foil	alu foil	alu foil	alu foil
Shielding:	tinned copper braiding	tinned copper braiding	tinned copper braiding	tinned copper braiding
Wrapping:	non-woven tape	non-woven tape	non-woven tape	non-woven tape
Jacket material:	PUR	PUR	PUR	PUR
Jacket color:	green (similar RAL 6018)			

Technical data:	CATLine CAT 6 S suitable for cable tracks	CATLine CAT 6A S suitable for cable tracks	CATLine CAT 6 RT suitable for cable tracks/ suitable for robots	CATLine CAT 6A RT suitable for cable tracks/ suitable for robots
Peak operating voltage:	max. 90 V	max. 90 V	max. 90 V	max. 90 V
Voltage UL/CSA:	300 V	300 V	300 V	300 V
Testing voltage: conductor/conductor: conductor/shielding:	2000 V 2000 V	2000 V 2000 V	2000 V 2000 V	2000 V 2000 V
Min. bending radius: fixed installation free movement: continuous flex:	5 x O.D. 10 x O.D. 15 x O.D.	5 x O.D. 10 x O.D. 15 x O.D.	5 x O.D. 10 x O.D. 15 x O.D.	5 x O.D. 10 x O.D. 15 x O.D.
Torsion:	—	—	up to $\pm 180^\circ/m$	up to $\pm 180^\circ/m$
Temperature range VDE: static: flexible:	UL: up to +80°C -40/+70°C -40/+70°C	UL: up to +80°C -40/+70°C -40/+70°C	UL: up to +80°C -40/+70°C -40/+70°C	UL: up to +80°C -40/+70°C -40/+70°C
Halogen-free:	acc. to IEC 60754-1 + VDE 0482-754-1	acc. to IEC 60754-1 + VDE 0482-754-1	acc. to IEC 60754-1 + VDE 0482-754-1	acc. to IEC 60754-1 + VDE 0482-754-1
Burning characteristics:	flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2; UL Horizontal Flame Test FT2			
Oil resistance:	TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2		TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2	
Characteristic impedance (100 MHz): accomplishes the electrical and transmission requirements with high frequency	100Ω ± 10Ω, with reference to EN 50288-5-2 / CAT 6	100Ω ± 10Ω, with reference to EN 50288-10-2 / CAT 6A	100Ω ± 10Ω, with reference to EN 50288-5-2 / CAT 6	100Ω ± 10Ω, with reference to EN 50288-10-2 / CAT 6A
Flexibility:	very good	very good	very good	very good
UL Style:	20549	20549	20549	20549
Absence of harmful substances:	acc. to RoHS directive of the European Union, see page O/30			

item no.	type	dimensions AWG	max. cond.-ø mm	outer-ø ±10% inch	cable weight ≈lbs/mft
► 16774630	CATLine CAT 6 S	26 (~ 7/34)/4pr	1.05	0.280	7.1
► 16774631	CATLine CAT 6A S	26 (~ 7/34)/4pr	1.05	0.280	7.1
► 16874630	CATLine CAT 6 RT	26 (~ 7/34)/4pr	1.05	0.280	7.1
► 16874631	CATLine CAT 6A RT	26 (~ 7/34)/4pr	1.05	0.280	7.1

Other dimensions and colors are available on request



+90°C on request

Also possible as a
cable assembly with
M12 or RJ 45 plug



CAT 7A Ethernet Cables for Greenhouses

CATLine CAT 7A S Gigabit Ethernet cable suitable for cable tracks

CATLine CAT 7A RT Gigabit Ethernet cable suitable for robots

549 80°C 300V CSA AWM I/II A/B 80°C 300V FT2 CE



Marking for CATLine CAT 7A S 17774631:

SAB BRÖCKSKES · D-VIERSEN · CATLine Cat.7A S 4x2x26AWG 17774631 UL AWM Style 20549 80°C 300V CSA AWM I/II A/B 80°C 300V FT2 CE



Construction:	CATLine CAT 7A S suitable for cable tracks	CATLine CAT 7A RT suitable for robots
Item numbers:	17774631 / 17774431	17874631 / 17874431
Dimensions:	4 x 2 x 26 AWG / 4 x 2 x 24 AWG	4 x 2 x 26 AWG / 4 x 2 x 24 AWG
Conductors:	bare copper strands, fine wires	bare copper strands, fine wires
Insulation:	special polymer	special polymer
Color code:	white-blue/blue, white-orange/orange, white-green/green, white-brown/brown	white-blue/blue, white-orange/orange, white-green/green, white-brown/brown
Stranding:	conductors twisted to pairs, pairs shielded with foil, pairs together	conductors twisted to pairs, pairs shielded with foil, pairs together
Shielding:	aluminized non-woven tape	aluminized non-woven tape
Shielding:	tinned copper braiding	tinned copper braiding
Wrapping:	non-woven tape	non-woven tape
Jacket material:	PUR	PUR
Jacket color:	green (similar RAL 6018)	green (similar RAL 6018)

Technical data:	CATLine CAT 7A S suitable for cable tracks	CATLine CAT 7A RT suitable for robots
Peak operating voltage:	max. 90 V	max. 90V
Voltage UL/CSA:	300 V	300 V
Testing voltage: conductor/conductor: conductor/shielding:	2000 V 2000 V	2000 V 2000 V
Min. bending radius: fixed installation: free movement: continuous flex:	5 x O.D. 10 x O.D. 15 x O.D.	5 x O.D. 10 x O.D. —
Torsion angle:	—	up to ± 180°/m
Temperature range VDE: static: flexible:	UL/CSA: up to +80°C -40/+70°C -40/+70°C	UL/CSA: up to +80°C -40/+70°C -40/+70°C
Halogen-free:	acc. to IEC 60754-1 + VDE 0482-754-1	acc. to IEC 60754-1 + VDE 0482-754-1
Burning characteristics:	flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2 UL Horizontal Flame Test FT2	flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2 UL Horizontal Flame Test FT2
Oil resistance:	TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2	TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Characteristic impedance (100 MHz):	100Ω ± 10Ω, accomplishes the electrical and transmission requirements with high frequency with reference to EN 50288-9-2 + VDE 0819-9-2 / CAT 7A	
Flexibility:	very good	very good
UL Style:	20549	20549
Absence of harmful substances:	acc. to RoHS directive of the European Union, see page O/30	

item no.	type	dimensions AWG	max. cond.-ø mm	outer-ø ±10% inch	outer-ø ±10% inch	cable weight ≈lbs/mft
► 17774631	CATLine CAT 7A S	26 (≈ 7/34)/4pr	1.50	0.355	8.5	54
► 17774431	CATLine CAT 7A S	24 (≈ 7/34)/4pr	1.60	0.409	10.4	68
► 17874631	CATLine CAT 7A RT	26 (≈ 7/34)/4pr	1.50	0.350	8.9	56
► 17874431	CATLine CAT 7A RT	24 (≈ 7/34)/4pr	1.60	0.366	9.3	66

Other dimensions and colors are available on request



Also possible as a
cable assembly with
M12 or RJ 45 plug



Reeling Ethernet Cables for Greenhouses

CATLine CAT 5e DR CAT 5e reeling industrial Ethernet cable

CATLine CAT 6A DR CAT 6A reeling gigabit Ethernet cable

CATLine CAT 7A DR CAT 7A reeling gigabit Ethernet cable

RSEN · **CATLine** Cat.7A DR 4x2x26AWG 17394651 CE



Marking for CATLine CAT 7A DR 17394651:

SAB BRÖCKSKES · D-VIERNSEN · **CATLine** Cat.7A DR 4x2x26AWG 17394651 CE

Construction:	CATLine CAT 5e DR reeling Ethernet cable	CATLine CAT 6A DR reeling Ethernet cable	CATLine CAT 7A DR reeling Ethernet cable
Item numbers:	15394651	16394651	17394651
Dimensions:	4 x 2 x 26 AWG	4 x 2 x 26 AWG	4 x 2 x 26 AWG
Conductor:	bare copper strands, fine wires	bare copper strands, fine wires	bare copper strands, fine wires
Insulation:	special polymer	special polymer	special polymer
Color code:	white-blue/blue, white-orange/orange, white-green/green, white-brown/brown	white-blue/blue, white-orange/orange, white-green/green, white-brown/brown	white-blue/blue, white-orange/orange, white-green/green, white-brown/brown
Stranding:	conductors twisted to pairs, pairs together	conductors twisted to pairs, pairs together	conductors twisted to pairs, pairs shielded with foil, pairs together
Wrapping:	non-woven tape	non-woven tape	—
Shielding:	alu foil	alu foil	aluminized non-woven tape
Shielding:	tinned copper braiding	tinned copper braiding	tinned copper braiding
Wrapping:	non-woven tape	non-woven tape	non-woven tape
Jacket material:	PUR / supporting braid/ PUR	PUR / supporting braid/ PUR	PUR / supporting braid/ PUR
Jacket color:	black (RAL 9005)	black (RAL 9005)	black (RAL 9005)

Technical data:	CATLine CAT 5e DR reeling Ethernet cable	CATLine CAT 6A DR reeling Ethernet cable	CATLine CAT 7A DR reeling Ethernet cable
Peak operating voltage:	max. 90 V	max. 90 V	max. 90 V
Testing voltage: conductor/conductor: conductor/shielding:	750 V 750 V	750 V 750 V	750 V 750 V
Min. bending radius for laying and installation (fixed installation): for repeated winding action (flexible application): guided on pulleys (flexible application):	5 x O.D. 10 x O.D. 12 x O.D.	5 x O.D. 10 x O.D. 12 x O.D.	5 x O.D. 10 x O.D. 12 x O.D.
Temperature range DIN VDE: static: flexible:	-50/+90°C -40/+90°C	-50/+90°C -40/+90°C	-50/+90°C -40/+90°C
Halogen-free:	acc. to IEC 60754-1 + VDE 0482-754-1	acc. to IEC 60754-1 + VDE 0482-754-1	acc. to IEC 60754-1 + VDE 0482-754-1
Oil resistance:	TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2	TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2	TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Characteristic impedance (100 MHz):	100Ω ± 10Ω, accomplishes the electrical and transmission requirements with high frequency with reference to EN 50288-2-2 / CAT 5	100Ω ± 10Ω, accomplishes the electrical and transmission requirements with high frequency with reference to EN 50288-10-2 / CAT 6A	100Ω ± 10Ω, accomplishes the electrical and transmission requirements with high frequency with reference to EN 50288-9-2 / CAT 7A
Weather resistance:	very good	very good	very good
Application:	suitable for EtherCAT and EtherNET/IP applications		
Absence of harmful substances:	acc. to RoHS directive of the European Union, see page O/30		

item no.	type	dimensions AWG	max. cond.-ø mm	outer-ø ±10% inch	cable weight ≈lbs/mft	tensile strength max. N
► 15394651	CATLine CAT 5e DR	26 (≈ 7/34)/4pr	1.05	0.335	8.5	53
► 16394651	CATLine CAT 6A DR	26 (≈ 7/34)/4pr	1.05	0.335	8.5	54
► 17394651	CATLine CAT 7A DR	26 (≈ 7/34)/4pr	1.05	0.413	10.5	79

Other dimensions and colors are available on request


Also possible as a
cable assembly with
M12 or RJ 45 plug



Servo Motor Cables for Greenhouses

SL 834 C

Continuous flex polyurethane motor connection cable with black numbered conductors and overall tinned copper shield, low capacitance 0.6/1 kV



Marking for SL 834 C 8341604:

SAB BRÖCKSKES - D-VIERNSEN · 8340415 4 x 1.5 mm² SL 834 C 16 AWG/4c 1000V 8341604 DESINA AWM Style 20235 80°C CSA AWM I/II A/B 80°C 1000V FT1 FT2 CE

Construction:

Conductor:	bare copper strands acc. to IEC 60228, VDE 0295, class 6
Insulation:	special polymer
Color code:	black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334 and a green/yellow ground
Stranding:	in layers
Wrapping:	non-woven tape
Shielding:	tinned copper braiding
Jacket material:	PUR
Jacket color:	orange (RAL 2003)

Outstanding features:

- UL recognized, CSA approval
- Low capacitance
- Very good EMC characteristics
- Halogen-free
- Very high flexibility
- Suitable for cable tracks
- Very good oil resistance
- Very long service life
- Adhesion-free installation
- Free from paint wetting impairment substances (PWIS-free)
- Flexible at low temperatures
- DESINA® colors (see page G/3)

Technical data:

Nominal voltage:	Uo/U 0.6/1 kV
Voltage UL/CSA:	1000 V
Testing voltage:	conductor/conductor: 4000 V conductor/shielding: 4000 V
Min. bending radius:	
fixed installation:	5 x O.D.
free movement:	10 x O.D.
Radiation resistance:	5 x 10 ⁷ cJ/kg
Temperature range:	DIN VDE static: -50/+90°C flexible: -40/+90°C
UL/CSA:	up to +80°C
Halogen-free:	acc. to IEC 60754-1 + VDE 0482-754-1
Burning characteristics:	flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2; CSA FT1, FT2
Oil resistance:	very good - TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Chemical resistance:	good - against acids, alkalines, solvents, hydraulic liquids, etc.
Approvals:	UR AWM, CSA AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

DESINA®
SIEMENS®

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 16 AWG (≈ 84/34) • 1.50 mm ²	4	0.354	9.0	85
8341604				
► 14 AWG (≈ 140/34) • 2.50 mm ²	4	0.425	10.8	131
8341404				
► 12 AWG (≈ 224/34) • 4.00 mm ²	4	0.488	12.4	181
8341204				

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 10 AWG (≈ 186/32) • 6.00 mm ²	4	0.606	15.4	267
8341004				
► 8 AWG (≈ 320/32) • 10.00 mm ²	4	0.693	17.6	406
8340804				
► 6 AWG (≈ 504/32) • 16.00 mm ²	4	0.894	22.7	640
8340604				

item no.	no. of conductors incl. ground	outer-Ø ±10% inch	outer-Ø ±10% inch	cable weight ≈lbs/mft
► 4 AWG (≈ 760/32) • 25.00 mm ²	4	1.008	25.6	875
8340404				
► 2 AWG (≈ 1083/32) • 35.00 mm ²	4	1.138	28.9	1176
8340204				
► 1 AWG (≈ 703/28) • 50.00 mm ²	4	1.358	34.5	1670
8340104				

Other dimensions and colors are available on request



low capacity for your frequency controlled drives and motors

Note: DESINA® is a registered trademark of the German Machine Tool Builders' Association.



Servo Motor Cables for Greenhouses

SL 841 C

Continuous flex TPE motor connection cable with black numbered power conductors,
1 or 2 supply pairs and overall tinned copper shield, 0.6/1 kV



Style 20235 80°C CSA AWM I/II A/B 80°C 300V FT1 FT CE



Marking for SL 841 C 8410407:

SAB BRÖCKSKES · D-VIERNSEN · 8410407 SL 841 C 4 x 0.75 mm² (1000V) + 2 x (2 x 0.34 mm²) (300V) DESINA AWM Style 20235 80°C CSA AWM I/II A/B 80°C 300V FT1 FT2 CE

Construction:

Conductor:	bare copper strands acc. to IEC 60228, VDE 0295, class 6 < 20 AWG with reference to VDE 0812
Insulation:	TPE
Color code:	black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334 and a green/yellow ground
from item no. 8411415:	power supply conductors: * U1, V2, W3 and a green/yellow ground control conductors: ** BR1 and BR2
Stranding:	control conductors: 22 - 14 AWG; twisted to pairs
Shielding:	pairs wrapped with alu. foil and tinned copper braiding
Wrapping:	pairs with PETP foil
Stranding:	shielded control pairs and power supply conductors twisted together in layers
Wrapping:	two layers non-woven tape
Shielding:	overall tinned copper braiding
Wrapping:	non-woven tape
Jacket material:	PUR, TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2 with matte surface
Jacket color:	orange (RAL 2003)

Outstanding features:

- UL recognized, CSA approval
- Very good EMC characteristics
- Long service life
- Adhesion-free installation
- High flexibility
- Suitable for cable tracks
- Halogen-free
- Free from paint wetting impairment substances (PWIS-free)
- Flexible at low temperatures
- DESINA® colors (see page G/3)
- In accordance with Indramat INK and Siemens 6FX8008

Technical data:

Peak operating voltage:	control conductors: max. 350 V
Nominal voltage:	power supply conductors: Uo/U 0.6/1 kV
Voltage UL/CSA:	control conductors: 300 V power supply conductors: 1000 V
Testing voltage:	power supply conductors: conductor/conductor: 4000 V conductor/shielding: 4000 V control conductors: conductor/conductor: 2000 V conductor/shielding: 2000 V
Min. bending radius:	fixed installation: 5 x O.D. free movement: 10 x O.D. for continuous flexing: 12 x O.D.
Radiation resistance:	5 x 10 ⁷ cJ/kg
Temperature range:	DIN VDE static: -50/+90°C flexible: -40/+90°C
UL/CSA:	up to +80°C
Halogen-free:	acc. to IEC 60754-1 + VDE 0482-754-1
Burning characteristics:	flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2; UL FT1, CSA FT1, FT2
Oil resistance:	very good - TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Chemical resistance:	good - against acids, alkalines, solvents, hydraulic liquids, etc.
Weather resistance:	very good
Approvals:	UR AWM, CSA AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30



Cable harnessing
possible on request

DESINA®
BOSCH REXROTH®

item no.	power supply conductors	control pairs individually shielded*	outer-Ø inch	outer-Ø mm	cable weight ≈ lbs/mft
► 8410407	19 AWG/4c	22 AWG/2pr	0.457 ± 0.020	11.6 ± 0.5	113
► 8410410	18 AWG/4c	19 AWG/2pr	0.465 ± 0.020	11.8 ± 0.5	135
► 8410415	16 AWG/4c	19 AWG/2pr	0.484 ± 0.020	12.3 ± 0.5	153
► 8410425	14 AWG/4c	18 AWG/2pr	0.571 ± 0.031	14.5 ± 0.8	215
► 8410441	12 AWG/4c	18 AWG/1pr + 16 AWG/1pr	0.685 ± 0.024	17.4 ± 0.6	308
► 8410461	10 AWG/4c	18 AWG/1pr + 16 AWG/1pr	0.744 ± 0.031	18.9 ± 0.8	374
► 8410471	8 AWG/4c	18 AWG/1pr + 16 AWG/1pr	0.803 ± 0.039	20.4 ± 1.0	495
► 8410485	6 AWG/4c	16 AWG/2pr	1.024 ± 0.031	26.0 ± 0.8	746
► 8410490	4 AWG/4c	16 AWG/2pr	1.157 ± 0.031	29.4 ± 0.8	1019
► 8410495	2 AWG/4c	16 AWG/2pr	1.232 ± 0.031	31.3 ± 0.8	1265
► 8410496	1 AWG/4c	14 AWG/2pr	1.504 ± 0.031	38.2 ± 0.8	1787

item no.	power conductors	control pairs individually shielded*	outer-Ø inch	outer-Ø mm	cable weight ≈ lbs/mft
► 8411415	16 AWG/4c	16 AWG/1pr	0.492 ± 0.012	12.5 ± 0.3	149
► 8411425	14 AWG/4c	16 AWG/1pr	0.524 ± 0.016	13.3 ± 0.4	191
► 8411440	12 AWG/4c	16 AWG/1pr	0.598 ± 0.016	15.2 ± 0.4	248
► 8411460	10 AWG/4c	16 AWG/1pr	0.654 ± 0.043	16.6 ± 1.1	326
► 8411470	8 AWG/4c	16 AWG/1pr	0.768 ± 0.063	19.5 ± 1.6	455
► 8411480	6 AWG/4c	16 AWG/1pr	0.933 ± 0.039	23.7 ± 1.0	685
► 8411490	4 AWG/4c	16 AWG/1pr	1.071 ± 0.028	27.2 ± 0.7	953
► 8411495	2 AWG/4c	16 AWG/1pr	1.185 ± 0.039	30.1 ± 1.0	1216
► 8411496	1 AWG/4c	16 AWG/1pr	1.354 ± 0.039	34.4 ± 1.0	1655

Other dimensions and colors are available on request

Note: SIEMENS® is a registered trademark. It is only used for comparative purposes.
BOSCH REXROTH® is a registered trademark. It is only used for comparative purposes.
DESINA® is a registered trademark of the German Machine Tool Builders' Association.




866-722-2974 • www.sabcable.com

Servo Motor Cables for Greenhouses

SL 843 C

Continuous flex TPE insulated and polyurethane jacketed transmission cable with colored conductors and overall tinned copper shield



style 20235 80°C CSA AWM I/II A/B 80°C 300V FT1 CE



Marking for SL 843 C 8431050:

SAB BRÖCKSKES · D-VIERSEN · 8431050 SL 843 C 3 x (2 x 0.14 mm² D) + 4 x 0.22 mm² + 2 x 0.5 mm² **DESINA** AWM-Style 20235 80°C CSA AWM I/II A/B 80°C 300V FT1 CE

Construction:

Conductor:	bare copper strands acc. to VDE 0812
Insulation:	TPE
Color code:	colored (see chart below)
Stranding:	in layers or pairwise
	8430160, 8430040, 8430060, 8430020, 8430022, 8431050 & 8430070:
Shielding:	pairs with tinned copper wires braided or wrapped
Inner jacket:	TPE over shielded pairs
Stranding:	conductors/pairs twisted together in layers
Wrapping:	one or two layers non-woven tape
Shielding:	tinned copper braiding
Wrapping:	non-woven tape
Jacket material:	PUR, TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2 with matte surface
Jacket color:	green (RAL 6018) or orange (RAL 2003)

Outstanding features:

- Good EMC characteristics
 - High flexibility
 - Suitable for cable tracks
 - Oil resistant
 - Long service life
 - Adhesion-free installation
 - Halogen-free
 - Free from paint wetting impairment substances (PWIS-free)
 - DESINA® colors (see page G/3)

Technical data:

Peak operating voltage:	max. 350 V
Voltage UL/CSA:	300 V
Testing voltage:	conductor/conductor: 2000 V conductor/shielding: 2000 V
Min. bending radius: <i>fixed installation:</i>	5 x O.D.
<i>free movement:</i>	10 x O.D.
<i>for continuous flexing:</i>	12 x O.D.
Radiation resistance:	5 x 10 ⁷ cJ/kg
Temperature range: <i>static:</i>	DIN VDE -50/+90°C
<i>flexible:</i>	UL/CSA: up to +80°C -40/+90°C
Halogen-free:	acc. to IEC 60754-1 + VDE 0482-754-1
Burning characteristics:	flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2; UL FT1, CSA FT1
Oil resistance:	very good - TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Chemical resistance:	good - against acids, alkalines, solvents, hydraulic liquids, etc.
Weather resistance:	very good
Approvals:	UR AWM, CSA AWM, CE, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30



**suitable for
resolvers and shaft encoders**

item no.	dimensions	jacket color	outer-ø		cable weight ≈lbs/mft	color codes
			inch	mm		
► 8430009	24 AWG/4pr + 20 AWG/2c	orange	0.346 ± 0.012	8.8 ± 0.3	62	(BN/GN+RD/BK+BU/VT+GY/PK) - (WH+BN)
► 8430010	24 AWG/4pr + 18 AWG/2c	orange	0.346 ± 0.012	8.8 ± 0.3	65	(BN/GN+RD/BK+BU/VT+GY/PK) - (WH+BN)
► 8430160	(24 AWG/3pr)D + 24 AWG/3c + 18 AWG/2c	orange	0.394 ± 0.012	10.0 ± 0.3	89	(GN/YE+GY/PK+BU/RD) - (GY-PK+RD-BU+WH-GN) - (WH+BN)
► 8430040	(24 AWG/3pr)D	orange	0.343 ± 0.012	8.7 ± 0.3	63	(WH/BN+GN/YE+GY/PK)
► 8430060	26 AWG/4pr + (26 AWG/4c)D + 18 AWG/4c	orange	0.386 ± 0.012	9.8 ± 0.3	91	(GY/PK+YE/VT+BN/GN+BK/RD) - (GN-BK+BU-BK+YE-BK+RD-BK) - (WH+BU+WH-GN+BN-GN)
► 8430012	26 AWG/4pr + 20 AWG/4c	green	0.358 ± 10%	9.1 ± 10%	68	(PK/GY+RD/BK+BN/GN+YE/VT) - (BU+WH+BN-GN+WH-GN)
► 8430112	26 AWG/10c + 20 AWG/2c	green	0.335 ± 10%	8.5 ± 10%	60	(WH+BN+GN+YE+GY+PK+BU+RD+BK+VT) - (WH+BN)
► 8430114	26 AWG/10c + 20 AWG/4c	green	0.354 ± 10%	9.0 ± 10%	71	(WH+BN+GN+YE+GY+PK+BU+RD+BK+VT) - (WH+BN+GN+YE)
► 8430006	24 AWG/3pr + 20 AWG/2c	green	0.343 ± 10%	8.7 ± 10%	60	(WH+BN+GN/YE+GY/PK) - (BU+RD)
► 8430013	0.38 mm²/4pr + 20 AWG/4c	green	0.406 ± 10%	10.3 ± 10%	91	(WH+BN+GN/YE+GY/PK+BU/RD) - (BK+VT+GY-PK+RD-BU)
► 8430020	(26 AWG/3pr)C + 18 AWG/2c	green	0.394 ± 10%	10.0 ± 10%	85	(GN/YE+GY/PK+BU/RD) - (WH+BN)
► 8430022	(26 AWG/3pr)C + (20 AWG/2c)C	green	0.398 ± 10%	10.1 ± 10%	90	(GN/YE+GY/PK+BU/RD) - (WH+BN)
► 8431050	(26 AWG/3pr)D + 26 AWG/4c + 0.22 mm²/4c + 20 AWG/2c	green	0.421 ± 10%	10.7 ± 10%	87	(RD/OR+BN/BK+GN/YE) - (BU+GY+WH-BK+WH-YE) - (BN-YE+GN-RD+BN-GY+GN-BK) - (BN-BU+BN-RD)
► 8430070	(26 AWG/3pr)D + 26 AWG/4c + 20 AWG/2c	green	0.398 ± 10%	10.1 ± 10%	82	(RD/OR+BN/BK+GN/YE) - (BU+GY+WH-BK+WH-YE) - (BN-BU+BN-RD)
► 8430310	0.22 mm²/12c	green	0.335 ± 10%	8.5 ± 10%	58	(WH+BN+GN+YE+GY+PK+BU+RD+BK+VT+GY-PK+RD-BU)
► 8430212	0.18 mm²/2pr	green	0.264 ± 10%	6.7 ± 10%	34	(WH/BN+GN/YE)
► 8430214	0.18 mm²/4pr	green	0.323 ± 10%	8.2 ± 10%	48	(WH/BN+GN/YE+GY/PK+BU/RD)
► 8430216	0.18 mm²/8pr	green	0.382 ± 10%	9.7 ± 10%	70	(WH/BN+GN/YE+GY/PK+BU/RD+BK/VT+GY-PK/RD-BU+)

Note: SIEMENS® is a registered trademark. It is only used for comparative purposes.

BOSCH REXROTH® is a registered trademark. It is only used for comparative purposes.
DESINA® is a registered trademark of the German Machine Tool Builders' Association.

BOSCH REXROTH® is a registered trademark. It is only used for comparative purposes.
DESINA® is a registered trademark of the German Machine Tool Builders' Association.

Other dimensions and colors are available on request
Alodized C = tinned copper braid D = tinned copper spiral



**SPECIAL
CABLES**

866-722-2974 • www.sabcable.com

Servo Motor Cables for Greenhouses

SL 839 C

Continuous flex composite polyurethane transmission cable with colored conductors and overall tinned copper shield



mm² DESINA AWM Style 20236 80°C 30V



Marking for SL 839 C 8390122:

SAB BRÖCKSKES · D-VIERNSEN · 8390122 SL 839 C 12 x 0.22 mm² DESINA AWM Style 20236 80°C 30V

Construction:

Conductor:	tinned copper strands acc. to VDE 0812
Insulation:	special polymer
Color code:	colored (see chart below)
	8390114, 8390214, & 8391050:
Shielding:	pairs shielded with tinned copper braiding
Inner jacket:	special polymer
Stranding:	conductors or pairs; twisted together in layers
Wrapping:	one non-woven tape or non-woven tape and PETP foil
Shielding:	tinned copper braiding
Wrapping:	non-woven tape
Jacket material:	PUR, TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2 with matte surface or PU acc. to UL 758
Jacket color:	green (RAL 6018)

Outstanding features:

- UL recognized
- Good EMC characteristics
- Flexible and flexing installation
- Oil resistant
- Long service life
- Adhesion-free installation
- Halogen-free
- Suitable for cable tracks
- Free from paint wetting impairment substances (PWIS-free)
- DESINA® colors (see page G/3)

Technical data:

Nominal voltage:	max. 30 V
Voltage UL:	30 V
Testing voltage:	conductor/conductor: 600 V conductor/shielding: 600 V
Min. bending radius:	
fixed installation:	5 x O.D.
free movement:	10 x O.D.
for continuous flexing:	12 x O.D.
Radiation resistance:	5 x 10 ⁷ cJ/kg
Temperature range:	DIN VDE UL/CSA: up to +80°C
static:	-40/+70°C
flexible:	-20/+70°C
Halogen-free:	acc. to IEC 60754-1 + VDE 0482-754-1
Oil resistance:	very good - TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2; oil rating 60°C acc. to UL 758
Chemical resistance:	good - against acids, alkalines, solvents, hydraulic liquids, etc.
Weather resistance:	very good
Approvals:	UR AWM, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

suitable for resolvers
and shaft encoders



Item no.	dimensions	outer-Ø	cable weight	color codes
		inch	mm	≈lbs/mft
Jacket material TMPU acc. to DIN VDE 0282				
► 8390114	(0.14 mm ² /3pr)D + (20 AWG/2c)D	0.362 ± 0.016	9.2 ± 0.4	71 (GN/YE+BN/BK+OR/RD) - (RD+BK)
► 8390214	(0.14 mm ² /3pr)D + 0.14 mm ² + 20 AWG/2c	0.354 ± 0.016	9.0 ± 0.4	68 (RD/OR+BN/BK+GN/YE) - (BU+GY+WH-BK+WH-YE) - (BN-BU+BN-RD)
► 8391050	(0.14 mm ² /3pr)D + 0.14 mm ² /4c + 0.22 mm ² /4c + 20 AWG/2c	0.378 ± 0.016	9.6 ± 0.4	77 (RD/OR+BN/BK+GN/YE) - (BU+GY+WH-BK+WH-YE) - (BN-YE+GN-RD+BN-GY+GN-BK) - (BN-BU+BN-RD)
► 8390138	0.38 mm ² /4pr + 20 AWG/4c	0.346 ± 0.016	8.8 ± 0.4	75 (RD/OR+GN/YE+BU/VT+BN/BK) - (BK-WH+RD-WH+YE-WH+BU-WH)
► 8390318	0.18 mm ² /8pr	0.307 ± 0.016	7.8 ± 0.4	52 (WH/GY+VT/BU+GN/YE+OR/RD+BK/BK+BN/WH-RD/WH-OR+WH-BK/WH-BN+WH-YE/WH-GN)
► 8390122	0.22 mm ² /12c	0.264 ± 0.016	6.7 ± 0.4	44 (RD+BK+BN+WH+GY+VT+BU+GN+YE+OR+WH-BN+WH-BK)
Jacket material PU acc. to UL 758				
► 8390118	0.18 mm ² /4c	0.193 ± 0.016	4.9 ± 0.4	20 (RD+BK+OR+BN)
► 8390218	0.18 mm ² /4pr	0.248 ± 0.016	6.3 ± 0.4	34 (VT/BU+GN/YE+OR/RD+BK/BN)
► 8390115	0.15 mm ² /2pr + 0.38 mm ² /2c	0.272 ± 0.012	6.9 ± 0.3	45 (GN/YE+BU/PK) + (RD+BK)
► 8390220	0.20 mm ² /2pr + 0.38 mm ² /2c	0.272 ± 0.012	6.9 ± 0.3	41 (GN/YE+BU/PK) + (RD+BK)

Other dimensions and colors are available on request
D = spiral shield with pairs

Note: DESINA® is a registered trademark of the German Machine Tool Builders' Association.



866-722-2974 • www.sabcable.com


Polyamide Cord Grips for Greenhouses

CG 100 Metric

Dome cap cord grip, black or gray with locknut

Metric Thread

Liquid tight seal, fast and easy installation, wide clamping range, multi-purpose applications, easy handling.

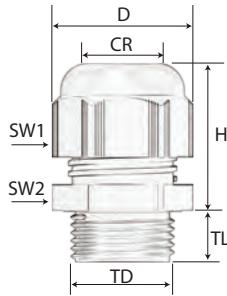

Technical data:

Material:	Polyamide 6
Seal:	Chloroprene (CR)
Color:	RAL 7001 (gray) RAL 9005 (black)
Protection type:	IP 68 - 5 Bar NEMA 4X
Temperature range:	
permanent:	-20°C to +100°C
intermittent:	-30°C to +150°C
Flammability:	V2 (according to UL 94)
Approvals:	cURus, cULus, cCSAus, VDE, DNV-GL, CE



Part Number		Thread Type	Clamping Range Ø min-max (CR)		Outer Diameter (D) inches	Wrenching Flats Cap (SW1) inches	Wrenching Flats Body (SW2) inches	Thread Diameter (TD)		Thread Length (TL) inches	Max. Height (H) inches	UL
gray	black		inches	mm				inches	mm			
Metric												
PMG-12*	PMB-12*	M12x1.5	0.118 - 0.256	3.0 - 6.5	0.669	0.591	0.591	0.472	12	0.315	0.996	cURus
PMG-16C*	PMB-16C*	M16x1.5	0.157 - 0.315	4.0 - 8.0	0.854	0.748	0.748	0.630	16	0.394	1.079	-
PMG-16*	PMB-16*	M16x1.5	0.197 - 0.394	5.0 - 10.0	0.984	0.866	0.866	0.630	16	0.394	1.268	cURus
PMG-20*	PMB-20*	M20x1.5	0.236 - 0.472	6.0 - 12.0	1.063	0.945	0.945	0.787	20	0.394	1.276	cULus
PMG-20C*	PMB-20C*	M20x1.5	0.394 - 0.551	10.0 - 14.0	1.217	1.063	1.063	0.787	20	0.394	1.256	cULus
PMG-25C*	PMB-25C*	M25x1.5	0.433 - 0.669	11.0 - 17.0	1.280	1.142	1.142	0.984	25	0.315	1.484	cULus
PMG-25*	PMB-25*	M25x1.5	0.512 - 0.709	13.0 - 18.0	1.465	1.299	1.299	0.984	25	0.394	1.512	cULus
PMG-32C*	PMB-32C*	M32x1.5	0.591 - 0.827	15.0 - 21.0	1.614	1.417	1.417	1.260	32	0.394	1.665	cULus
PMG-32	PMB-32	M32x1.5	0.709 - 0.984	18.0 - 25.0	1.854	1.654	1.654	1.260	32	0.591	1.705	cULus
PMG-40C†	PMB-40C†	M40x1.5	0.748 - 1.102	19.0 - 28.0	2.063	1.811	1.811	1.575	40	0.394	1.866	cULus
PMG-40	PMB-40	M40x1.5	0.866 - 1.260	22.0 - 32.0	2.346	2.087	2.087	1.575	40	0.709	2.063	cULus
PMG-50	PMB-50	M50x1.5	1.181 - 1.496	30.0 - 38.0	2.669	2.362	2.362	1.969	50	0.709	2.157	cULus
PMG-63	PMB-63	M63x1.5	1.339 - 1.732	34.0 - 44.0	2.850	2.559	2.559	2.480	63	0.709	2.161	cULus
PMG-75	PMB-75	M75x2.0	1.890 - 2.165	48.0 - 55.0	3.504	2.953	3.150	2.953	75	0.984	2.165	cULus
Metric with Reducer Bushings												
PMG-12R	PMB-12R	M12x1.5	0.079 - 0.197	2.0 - 5.0	0.669	0.591	0.591	0.472	12	0.315	0.996	cURus
PMG-16RC*	PMB-16RC*	M16x1.5	0.079 - 0.236	2.0 - 6.0	0.854	0.748	0.748	0.630	16	0.394	1.079	-
PMG-16R*	PMB-16R*	M16x1.5	0.118 - 0.276	3.0 - 7.0	0.984	0.866	0.866	0.630	16	0.394	1.268	cURus
PMG-20R*	PMB-20R*	M20x1.5	0.197 - 0.354	5.0 - 9.0	1.063	0.945	0.945	0.787	20	0.394	1.276	cULus
PMG-20RC*	PMB-20RC*	M20x1.5	0.276 - 0.472	7.0 - 12.0	1.217	1.063	1.063	0.787	20	0.394	1.256	cULus
PMG-25RC*	PMB-25RC*	M25x1.5	0.354 - 0.512	9.0 - 13.0	1.280	1.142	1.142	0.984	25	0.315	1.484	cULus
PMG-25R*	PMB-25R*	M25x1.5	0.354 - 0.630	9.0 - 16.0	1.465	1.299	1.299	0.984	25	0.394	1.512	cULus
PMG-32RC*	PMB-32RC*	M32x1.5	0.433 - 0.591	11.0 - 15.0	1.614	1.417	1.417	1.260	32	0.394	1.665	cULus
PMG-32R	PMB-32R	M32x1.5	0.472 - 0.787	12.0 - 20.0	1.854	1.654	1.654	1.260	32	0.591	1.705	cULus
PMG-40RC*	PMB-40RC*	M40x1.5	0.630 - 0.906	16.0 - 23.0	2.063	1.811	1.811	1.575	40	0.394	1.866	cULus
PMG-40R	PMB-40R	M40x1.5	0.787 - 1.024	20.0 - 26.0	2.346	2.087	2.087	1.575	40	0.709	2.063	cULus
PMG-50R	PMB-50R	M50x1.5	0.984 - 1.220	25.0 - 31.0	2.669	2.362	2.362	1.969	50	0.709	2.157	cULus
PMG-63R	PMB-63R	M63x1.5	1.142 - 1.378	29.0 - 35.0	2.850	2.559	2.559	2.480	63	0.709	2.161	cULus

* Available with longer thread of 0.591". Add an "L" to end of the P/N.

† Available with longer thread of 0.709". Add an "L" to end of the P/N.


Polyamide Cord Grips for Greenhouses

CG 100 PG

Dome cap cord grip, black or gray with locknut

PG Thread

Liquid tight seal, fast and easy installation, wide clamping range, multi-purpose applications, easy handling.

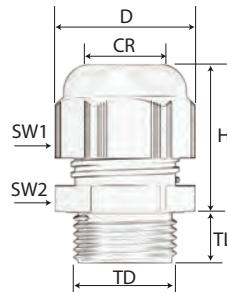

Technical data:

Material:	Polyamide 6
Seal:	Chloroprene (CR)
Color:	RAL 7001 (gray) RAL 9005 (black)
Protection type:	IP 68 - 5 Bar NEMA 4X
Temperature range: permanent:	-20°C to +100°C
intermittent:	-30°C to +150°C
Flammability:	V2 (according to UL 94)
Approvals:	cURus, cULus, cCSAus, DNV-GL, CE



Part Number	Thread Type	Clamping Range Ø min-max (CR)		Outer Diameter (D) inches	Wrenching Flats Cap (SW1) inches	Wrenching Flats Body (SW2) inches	Thread Diameter (TD)		Thread Length (TL) inches	Max. Height (H) inches	UL
		inches	mm				inches	mm			
PG											
PPG-7	PPB-7	PG 7	0.118 - 0.256	3.0 - 6.5	0.669	0.591	0.591	0.492	12.5	0.315	0.996 cURus
PPG-9	PPB-9	PG 9	0.157 - 0.315	4.0 - 8.0	0.854	0.748	0.748	0.598	15.2	0.315	1.079 cURus
PPG-11	PPB-11	PG 11	0.197 - 0.394	5.0 - 10.0	0.984	0.866	0.866	0.732	18.6	0.315	1.268 cURus
PPG-13	PPB-13	PG 13.5	0.236 - 0.472	6.0 - 12.0	1.063	0.945	0.945	0.803	20.4	0.394	1.276 cULus
PPG-16	PPB-16	PG 16	0.394 - 0.551	10.0 - 14.0	1.217	1.063	1.063	0.886	22.5	0.394	1.256 cULus
PPG-21	PPB-21	PG 21	0.512 - 0.709	13.0 - 18.0	1.465	1.299	1.299	1.114	28.3	0.433	1.512 cULus
PPG-29	PPB-29	PG 29	0.709 - 0.984	18.0 - 25.0	1.854	1.654	1.654	1.457	37.0	0.433	1.705 cULus
PPG-36	PPB-36	PG 36	0.866 - 1.260	22.0 - 32.0	2.346	2.087	2.087	1.850	47.0	0.512	2.063 cULus
PPG-42	PPB-42	PG 42	1.181 - 1.496	30.0 - 38.0	2.669	2.362	2.362	2.126	54.0	0.512	2.157 cULus
PPG-48	PPB-48	PG 48	1.339 - 1.732	34.0 - 44.0	2.850	2.559	2.559	2.335	59.3	0.551	2.161 cULus
PG with Reducer Bushings											
PPG-7R	PPB-7R	PG 7	0.079 - 0.197	2.0 - 5.0	0.669	0.591	0.591	0.492	12.5	0.315	0.996 cURus
PPG-9R	PPB-9R	PG 9	0.079 - 0.236	2.0 - 6.0	0.854	0.748	0.748	0.598	15.2	0.315	1.079 cURus
PPG-11R	PPB-11R	PG 11	0.118 - 0.276	3.0 - 7.0	0.984	0.866	0.866	0.732	18.6	0.315	1.268 cURus
PPG-13R	PPB-13R	PG 13.5	0.197 - 0.354	5.0 - 9.0	1.063	0.945	0.945	0.803	20.4	0.394	1.276 cULus
PPG-16R	PPB-16R	PG 16	0.276 - 0.472	7.0 - 12.0	1.217	1.063	1.063	0.886	22.5	0.394	1.256 cULus
PPG-21R	PPB-21R	PG 21	0.354 - 0.630	9.0 - 16.0	1.465	1.299	1.299	1.114	28.3	0.433	1.512 cULus
PPG-29R	PPB-29R	PG 29	0.472 - 0.787	12.0 - 20.0	1.854	1.654	1.654	1.457	37.0	0.433	1.705 cULus
PPG-36R	PPB-36R	PG 36	0.787 - 1.024	20.0 - 26.0	2.346	2.087	2.087	1.850	47.0	0.512	2.063 cULus
PPG-42R	PPB-42R	PG 42	0.984 - 1.220	25.0 - 31.0	2.669	2.362	2.362	2.126	54.0	0.512	2.157 cULus
PPG-48R	PPB-48R	PG 48	1.142 - 1.378	29.0 - 35.0	2.850	2.559	2.559	2.335	59.3	0.551	2.161 cULus


Polyamide Cord Grips for Greenhouses

CG 100 NPT

Dome cap cord grip, black or gray

NPT Thread

Liquid tight seal, fast and easy installation, wide clamping range, multi-purpose applications, easy handling.

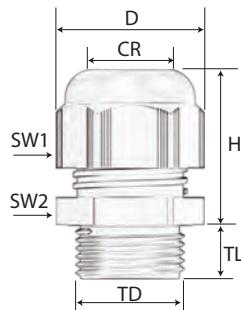


Technical data:

Material:	Polyamide 6
Seal:	Chloroprene (CR)
Color:	RAL 7001 (gray) RAL 9005 (black)
Protection type:	IP 68 - 5 Bar NEMA 4X
Temperature range: permanent:	-20°C to +100°C
intermittent:	-30°C to +150°C
Flammability:	V2 (according to UL 94)
Approvals:	cURus, cULus, cCSAus, DNV-GL, CE



Part Number	Thread Type	Clamping Range Ø min-max (CR)		Outer Diameter (D) inches	Wrenching Flats		Thread Diameter (TD)		Thread Length (TL) inches	Max. Height (H) inches	UL
		inches	mm		Cap (SW1) inches	Body (SW2) inches	inches	mm			
NPT											
PNG-3/8	PNB-3/8	NPT 3/8	0.197 - 0.394	5.0 - 10.0	0.984	0.866	0.866	0.675	17.2	0.591	1.268 cURus
PNG-1/2	PNB-1/2	NPT 1/2	0.236 - 0.472	6.0 - 12.0	1.063	0.945	0.945	0.840	21.3	0.591	1.276 cULus
PNG-1/2C	PNB-1/2C	NPT 1/2	0.394 - 0.551	10.0 - 14.0	1.217	1.063	1.063	0.840	21.3	0.591	1.256 cULus
PNG-3/4	PNB-3/4	NPT 3/4	0.512 - 0.709	13.0 - 18.0	1.465	1.299	1.299	1.050	26.7	0.591	1.512 cULus
PNG-1	PNB-1	NPT 1	0.709 - 0.984	18.0 - 25.0	1.854	1.654	1.654	1.315	33.4	0.709	1.705 cULus
NPT with Reducer Bushings											
PNG-3/8R	PNB-3/8R	NPT 3/8	0.118 - 0.276	3.0 - 7.0	0.984	0.866	0.866	0.675	17.2	0.591	1.268 cURus
PNG-1/2R	PNB-1/2R	NPT 1/2	0.197 - 0.354	5.0 - 9.0	1.063	0.945	0.945	0.840	21.3	0.591	1.276 cULus
PNG-1/2RC	PNB-1/2RC	NPT 1/2	0.276 - 0.472	7.0 - 12.0	1.217	1.063	1.063	0.840	21.3	0.591	1.256 cULus
PNG-3/4R	PNB-3/4R	NPT 3/4	0.354 - 0.630	9.0 - 16.0	1.465	1.299	1.299	1.050	26.7	0.591	1.512 cULus
PNG-1R	PNB-1R	NPT 1	0.472 - 0.787	12.0 - 20.0	1.854	1.654	1.654	1.315	33.4	0.709	1.705 cULus

Locknuts need to be purchased separately, see below

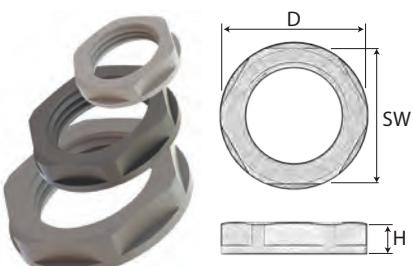

Part Number	Thread Type	Height		Diameter		Wrenching Flats		
		gray	black	inches	mm	inches	mm	
LNG-3/8	LNB-3/8	NPT 3/8	0.276	7	0.984	25	0.866	22
LNG-1/2	LNB-1/2	NPT 1/2	0.276	7	1.201	30.5	1.063	27
LNG-3/4	LNB-3/4	NPT 3/4	0.276	7	1.476	37.5	1.299	33
LNG-1	LNB-1	NPT 1	0.276	7	1.819	46.2	1.614	41


Metal Cord Grips for Greenhouses

CG 300 Metric

Nickel plated brass cord grip with standard or longer thread

Metric Thread

Impact resistant, suitable for industrial applications, water tight, corrosion resistant.

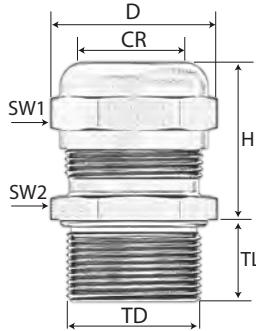

Technical data:

Material:	Brass, Nickel Plated
Clamping Insert:	Polyamide 6
Seal:	Chloroprene (CR)
O-Ring:	Neoprene (NBR)
Protection type:	IP 68 - 5 Bar NEMA 4X
Temperature range: permanent:	-20°C to +100°C
intermittent:	-40°C to +150°C
Flammability:	V2 (according to UL 94)
Approvals:	cURus, cULus, DNV-GL, CE



Part Number	Part Number with long threads	Thread Type	Clamping Range Ø min-max (CR) inches mm	Outer Diameter (D) inches	Wrenching Flats Cap (SW1) inches	Wrenching Flats Body (SW2) inches	Thread Diameter (TD) inches	Thread Length (TL) inches	Long Thread Length (TL) inches	Max. Height (H) inches	UL	
Metric												
MMS-12R ¹	MMS-12RL	M12x1.5	0.079 - 0.197	2.0 - 5.0	0.610	0.551	0.551	0.472	0.236	0.472	0.945	-
MMS-12 ¹	MMS-12L	M12x1.5	0.118 - 0.256	3.0 - 6.5	0.610	0.551	0.551	0.472	0.236	0.472	0.945	cURus
MMS-16R	MMS-16RL	M16x1.5	0.079 - 0.236	2.0 - 6.0	0.787	0.669	0.709	0.630	0.276	0.472	1.004	-
MMS-16	MMS-16L	M16x1.5	0.157 - 0.315	4.0 - 8.0	0.787	0.669	0.709	0.630	0.276	0.472	1.004	cURus
MMS-16RC	MMS-16RCL	M16x1.5	0.118 - 0.276	3.0 - 7.0	0.866	0.787	0.787	0.630	0.276	0.472	1.201	-
MMS-16C	MMS-16CL	M16x1.5	0.197 - 0.394	5.0 - 10.0	0.866	0.787	0.787	0.630	0.256	0.472	1.240	cURus
MMS-20R	MMS-20RL	M20x1.5	0.197 - 0.354	5.0 - 9.0	0.965	0.866	0.866	0.787	0.315	0.472	1.102	-
MMS-20	MMS-20L	M20x1.5	0.236 - 0.472	6.0 - 12.0	0.965	0.866	0.866	0.787	0.315	0.472	1.043	cULus
MMS-20C	MMS-20CL	M20x1.5	0.394 - 0.551	10.0 - 14.0	1.043	0.945	0.945	0.787	0.315	0.472	1.181	cULus
MMS-25R	MMS-25RL	M25x1.5	0.276 - 0.472	7.0 - 12.0	1.181	0.945	1.063	0.984	0.315	0.472	1.181	-
MMS-25*	MMS-25L	M25x1.5	0.394 - 0.551	10.0 - 14.0	1.181	0.945	1.063	0.984	0.315	0.472	1.181	cULus
MMS-25RC	MMS-25RCL	M25x1.5	0.433 - 0.669	11.0 - 17.0	1.181	1.063	1.063	0.984	0.315	0.472	1.280	cULus
MMS-25C	MMS-25CL	M25x1.5	0.512 - 0.709	13.0 - 18.0	1.299	1.181	1.181	0.984	0.315	0.472	1.378	cULus
MMS-32R	MMS-32RL	M32x1.5	0.354 - 0.630	9.0 - 16.0	1.476	1.181	1.339	1.260	0.354	0.591	1.378	-
MMS-32*	MMS-32L	M32x1.5	0.512 - 0.709	13.0 - 18.0	1.476	1.181	1.339	1.260	0.354	0.591	1.378	cULus
MMS-32RC	MMS-32RCL	M32x1.5	0.591 - 0.827	15.0 - 21.0	1.476	1.339	1.339	1.260	0.315	0.591	1.496	cULus
MMS-32C	MMS-32CL	M32x1.5	0.709 - 0.984	18.0 - 25.0	1.752	1.575	1.575	1.260	0.354	0.591	1.811	cULus
MMS-40R	MMS-40RL	M40x1.5	0.472 - 0.787	12.0 - 20.0	1.909	1.575	1.693	1.575	0.354	0.591	1.594	-
MMS-40*	MMS-40L	M40x1.5	0.709 - 0.984	18.0 - 25.0	1.909	1.575	1.693	1.575	0.354	0.591	1.594	cULus
MMS-40RC	MMS-40RCL	M40x1.5	0.748 - 1.102	19.0 - 28.0	1.909	1.693	1.693	1.575	0.354	0.591	1.791	cULus
MMS-40C	MMS-40CL	M40x1.5	0.866 - 1.260	22.0 - 32.0	2.185	1.969	1.969	1.575	0.354	0.591	2.146	cULus
MMS-50R	MMS-50RL	M50x1.5	0.787 - 1.024	20.0 - 26.0	2.402	1.969	2.165	1.969	0.354	0.591	1.969	-
MMS-50	MMS-50L	M50x1.5	0.866 - 1.260	22.0 - 32.0	2.402	1.969	2.165	1.969	0.354	0.591	1.969	cULus
MMS-50RC	MMS-50RCL	M50x1.5	1.063 - 1.496	27.0 - 38.0	2.520	2.283	2.283	1.969	0.354	0.591	2.126	cULus
MMS-50C	MMS-50CL	M50x1.5	1.339 - 1.732	34.0 - 44.0	2.756	2.520	2.520	1.969	0.354	0.591	2.165	cULus
MMS-63R	MMS-63RL	M63x1.5	1.142 - 1.378	29.0 - 35.0	2.953	2.520	2.677	2.480	0.551	0.709	2.165	-
MMS-63	MMS-63L	M63x1.5	1.339 - 1.732	34.0 - 44.0	2.953	2.520	2.677	2.480	0.551	0.709	2.165	cULus
MMS-63C	MMS-63CL	M63x1.5	1.457 - 2.087	37.0 - 53.0	3.268	2.953	2.953	2.480	0.394	0.709	2.087	cULus

* Other clamping ranges available

¹ Not NEMA 4X rated

Larger thread sizes (M72 to M120) available upon request

Locknuts need to be purchased separately, see page 54


Metal Cord Grips for Greenhouses

CG 300 PG

Nickel plated brass cord grip with standard or longer thread

PG Thread

Impact resistant, suitable for industrial applications, water tight, corrosion resistant.

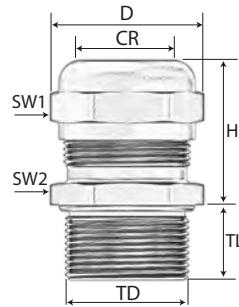

Technical data:

Material:	Brass, Nickel Plated
Clamping Insert:	Polyamide 6
Seal:	Chloroprene (CR)
O-Ring:	Neoprene (NBR)
Protection type:	IP 68 - 5 Bar NEMA 4X
Temperature range: permanent:	-20°C to +100°C
intermittent:	-40°C to +150°C
Flammability:	V2 (according to UL 94)
Approvals:	cURus, cULus, DNV-GL, CE



Part Number	Part Number with long threads	Thread Type	Clamping Range Ø min-max (CR) inches mm	Outer Diameter (D) inches mm	Wrenching Flats Cap (SW1) inches	Wrenching Flats Body (SW2) inches	Thread Diameter (TD) inches	Thread Length (TL) inches	Long Thread Length (TL) inches	Max. Height (H) inches	UL	
PG												
MPS-7	MPS-7L	PG 7	0.079 - 0.197	2.0 - 5.0	0.610	0.551	0.551	0.492	0.236	0.394	0.945	-
MPS-9R*	MPS-9RL	PG 9	0.118 - 0.256	3.0 - 6.5	0.610	0.551	0.551	0.492	0.236	0.394	0.945	cURus
MPS-9	MPS-9L	PG 9	0.079 - 0.236	2.0 - 6.0	0.744	0.669	0.669	0.598	0.236	0.394	1.004	-
MPS-11R*	MPS-11RL	PG 11	0.157 - 0.315	4.0 - 8.0	0.744	0.669	0.669	0.598	0.236	0.394	1.004	cURus
MPS-11	MPS-11L	PG 11	0.118 - 0.276	3.0 - 7.0	0.866	0.787	0.787	0.732	0.236	0.394	1.102	-
MPS-13R*	MPS-13RL	PG 13.5	0.197 - 0.394	5.0 - 10.0	0.866	0.787	0.787	0.732	0.236	0.394	1.102	cURus
MPS-13	MPS-13L	PG 13.5	0.197 - 0.354	5.0 - 9.0	0.965	0.866	0.866	0.803	0.256	0.394	1.043	-
MPS-16R*	MPS-16RL	PG 16	0.236 - 0.472	6.0 - 12.0	0.965	0.866	0.866	0.803	0.256	0.394	1.043	cULus
MPS-16	MPS-16L	PG 16	0.276 - 0.472	7.0 - 12.0	1.043	0.945	0.945	0.886	0.256	0.394	1.181	-
MPS-21R*	MPS-21RL	PG 21	0.394 - 0.551	10.0 - 14.0	1.043	0.945	0.945	0.886	0.256	0.394	1.181	cULus
MPS-21	MPS-21L	PG 21	0.354 - 0.630	9.0 - 16.0	1.299	1.181	1.181	1.114	0.283	0.472	1.378	-
MPS-29R*	MPS-29RL	PG 29	0.512 - 0.709	13.0 - 18.0	1.299	1.181	1.181	1.114	0.283	0.472	1.378	cULus
MPS-29	MPS-29L	PG 29	0.472 - 0.787	12.0 - 20.0	1.752	1.575	1.575	1.457	0.315	0.472	1.594	-
MPS-36R*	MPS-36RL	PG 36	0.709 - 0.984	18.0 - 25.0	1.752	1.575	1.575	1.457	0.315	0.472	1.594	cULus
MPS-36	MPS-36L	PG 36	0.787 - 1.024	20.0 - 26.0	2.185	1.969	1.969	1.850	0.354	0.551	1.969	-
MPS-42R*	MPS-42RL	PG 42	0.866 - 1.260	22.0 - 32.0	2.185	1.969	1.969	1.850	0.354	0.551	1.969	cULus
MPS-42	MPS-42L	PG 42	0.984 - 1.220	25.0 - 31.0	2.520	2.283	2.283	2.126	0.472	0.630	2.008	-
MPS-48R*	MPS-48RL	PG 48	1.181 - 1.496	30.0 - 38.0	2.520	2.283	2.283	2.126	0.472	0.630	2.008	cULus
MPS-48	MPS-48L	PG 48	1.142 - 1.378	29.0 - 35.0	2.756	2.520	2.520	2.335	0.551	0.709	2.146	-

* R versions are not NEMA 4X rated

Locknuts need to be purchased separately, see page 54


Metal Cord Grips for Greenhouses

CG 300 NPT

Nickel plated brass cord grip

NPT Thread

Impact resistant, suitable for industrial applications, water tight, corrosion resistant.

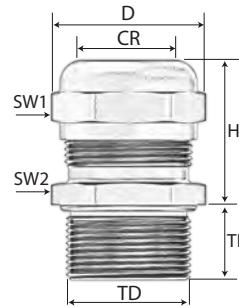

Technical data:

Material:	Brass, Nickel Plated
Clamping Insert:	Polyamide 6
Seal:	Chloroprene (CR)
O-Ring:	Neoprene (NBR)
Protection type:	IP 68 - 5 Bar NEMA 4X
Temperature range:	
permanent:	-20°C to +100°C
intermittent:	-40°C to +150°C
Flammability:	V2 (according to UL 94)
Approvals:	cURus, cULus, DNV-GL, CE



Part Number	Thread Type	Clamping Range Ø min-max		Outer Diameter (D) inches	Wrenching Flats		Thread Diameter (TD) inches	Thread Length (TL) inches	Max. Height (H) inches	UL
		inches	mm		Cap (SW1) inches	Body (SW2) inches				
NPT										
MNS-3/8R	NPT 3/8	0.079 - 0.236	2.0 - 6.0	0.827	0.669	0.748	0.675	0.453	1.004	-
MNS-3/8RC	NPT 3/8	0.118 - 0.276	3.0 - 7.0	0.866	0.787	0.787	0.675	0.453	1.240	-
MNS-3/8*	NPT 3/8	0.157 - 0.315	4.0 - 8.0	0.827	0.669	0.748	0.675	0.453	1.004	cURus
MNS-3/8C*	NPT 3/8	0.197 - 0.394	5.0 - 10.0	0.866	0.787	0.787	0.675	0.453	1.240	cURus
MNS-1/2R	NPT 1/2	0.197 - 0.354	5.0 - 9.0	0.965	0.866	0.866	0.840	0.512	1.083	-
MNS-1/2*	NPT 1/2	0.236 - 0.472	6.0 - 12.0	0.965	0.866	0.866	0.840	0.512	1.083	cULus
MNS-1/2RC	NPT 1/2	0.276 - 0.472	7.0 - 12.0	1.055	0.945	0.945	0.840	0.512	1.181	-
MNS-1/2C*	NPT 1/2	0.394 - 0.551	10.0 - 14.0	1.055	0.945	0.945	0.840	0.512	1.181	cULus
MNS-3/4R	NPT 3/4	0.354 - 0.630	9.0 - 16.0	1.299	1.181	1.181	1.050	0.512	1.496	-
MNS-3/4*	NPT 3/4	0.512 - 0.709	13.0 - 18.0	1.299	1.181	1.181	1.050	0.512	1.496	cULus
MNS-1R	NPT 1	0.472 - 0.787	12.0 - 20.0	1.909	1.575	1.693	1.315	0.512	1.791	-
MNS-1*	NPT 1	0.709 - 0.984	18.0 - 25.0	1.909	1.575	1.693	1.315	0.512	1.791	cULus
MNS-1 1/4	NPT 1 1/4	0.866 - 1.26	22.0 - 32.0	2.185	1.969	1.969	1.660	1.008	1.969	cULus
MNS-1 1/2	NPT 1 1/2	1.181 - 1.496	18.0 - 25.0	2.520	2.283	2.283	1.902	1.024	2.008	cULus
MNS-2	NPT-2	1.339 - 1.732	34.0 - 44.0	2.756	2.520	2.520	2.375	1.063	2.165	-

* NEMA 4X rated

Locknuts need to be purchased separately, see page 54


EMC Cord Grips for Greenhouses

CG EMC-2 Metric

Nickel plated brass EMC cable gland, standard & longer thread

Metric Thread

Optimal grounding of shielded cable, easy installation, water tight, impact resistant.

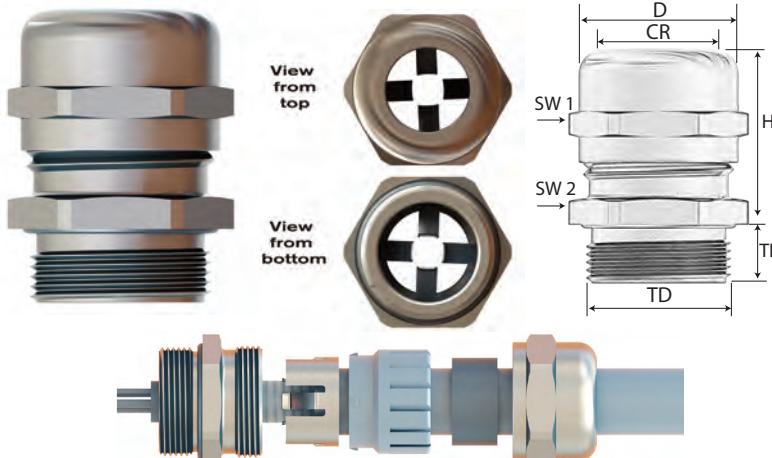

Technical data:

Material:	Brass, Nickel Plated
Contact spring:	Special Copper Alloy
Clamping Insert:	Polyamide 6
Seal:	Chloroprene (CR)
O-Ring:	Neoprene (NBR)
Protection type:	IP 68 - 5 Bar NEMA 4X
Temperature range: permanent:	-20°C to +100°C
intermittent:	-40°C to +150°C
Flammability:	V2 (according to UL 94)
Approvals:	cURus, cULus, VDE, DNV-GL, CE



Part Number	Thread Type	Clamping Range Ø min-max (CR)		Outer Ø (D)	Shield Diameter (Ø min)		Wrenching Flats		Thread Diameter (TD)	Thread Length (TL)	Max. Height (H)	UL
Metric												
EM2-12	M12x1.5	0.118	- 0.256	3.0 - 6.5	0.610	0.098	2.5	0.551	0.551	0.472	0.236	0.945
EM2-16	M16x1.5	0.157	- 0.315	4.0 - 8.0	0.787	0.138	3.5	0.669	0.709	0.630	0.276	1.004
EM2-16C	M16x1.5	0.197	- 0.394	5.0 - 10.0	0.866	0.157	4.0	0.787	0.787	0.630	0.256	1.240
EM2-20	M20x1.5	0.236	- 0.472	6.0 - 12.0	0.965	0.197	5.0	0.866	0.866	0.787	0.315	1.043
EM2-25	M25x1.5	0.394	- 0.551	10.0 - 14.0	1.181	0.335	8.5	0.945	1.063	0.984	0.315	1.181
EM2-25C	M25x1.5	0.512	- 0.709	13.0 - 18.0	1.299	0.433	11	1.181	1.181	0.984	0.315	1.575
EM2-32	M32x1.5	0.512	- 0.709	13.0 - 18.0	1.476	0.433	11	1.181	1.339	1.260	0.354	1.378
EM2-32C	M32x1.5	0.709	- 0.984	18.0 - 25.0	1.752	0.630	16	1.575	1.575	1.260	0.354	1.811
EM2-40	M40x1.5	0.709	- 0.984	18.0 - 25.0	1.909	0.630	16	1.575	1.693	1.575	0.354	1.594
EM2-40C	M40x1.5	0.866	- 1.260	22.0 - 32.0	2.185	0.787	20	1.969	1.969	1.575	0.354	2.146
EM2-50	M50x1.5	0.866	- 1.260	22.0 - 32.0	2.402	0.787	20	1.969	2.165	1.969	0.354	1.969
EM2-50C	M50x1.5	1.063	- 1.732	27.0 - 44.0	2.165	1.024	26	1.969	2.165	1.969	0.354	1.969
EM2-63	M63x1.5	1.339	- 1.732	34.0 - 44.0	2.953	1.220	31	2.520	2.677	2.480	0.551	2.165
Metric with Long Thread *												
EM2-12L	M12x1.5	0.118	- 0.256	3.0 - 6.5	0.610	0.098	2.5	0.551	0.551	0.472	0.472	0.945
EM2-16L	M16x1.5	0.157	- 0.315	4.0 - 8.0	0.787	0.138	3.5	0.669	0.709	0.630	0.472	1.004
EM2-20L	M20x1.5	0.236	- 0.472	6.0 - 12.0	0.965	0.197	5.0	0.866	0.866	0.787	0.472	1.043
EM2-25L	M25x1.5	0.394	- 0.551	10.0 - 14.0	1.181	0.335	8.5	0.945	1.063	0.984	0.472	1.181
EM2-32L	M32x1.5	0.512	- 0.709	13.0 - 18.0	1.476	0.433	11	1.181	1.339	1.260	0.591	1.378
EM2-40L	M40x1.5	0.709	- 0.984	18.0 - 25.0	1.909	0.630	16	1.575	1.693	1.575	0.591	1.594
EM2-50L	M50x1.5	0.866	- 1.260	22.0 - 32.0	2.402	0.787	20	1.969	2.165	1.969	0.591	1.969
EM2-63L	M63x1.5	1.339	- 1.732	34.0 - 44.0	2.953	1.220	31	2.520	2.677	2.480	0.709	2.165

* Long thread version is not NEMA 4X rated

Locknuts need to be purchased separately, see page 54

EMC Cord Grips for Greenhouses

CG EMC-2 PG / CG EMC-2 NPT

Nickel plated brass EMC cable gland, standard & longer thread


PG and NPT Thread

Optimal grounding of shielded cable, easy installation, water tight, impact resistant.



View from top

View from bottom

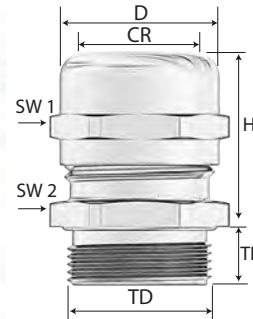

Technical data:

Material:	Brass, Nickel Plated
Contact spring:	Special Copper Alloy
Clamping Insert:	Polyamide 6
Seal:	Chloroprene (CR)
O-Ring:	Neoprene (NBR)
Protection type:	IP 68 - 5 Bar NEMA 4X
Temperature range: permanent:	-20°C to +100°C
intermittent:	-40°C to +150°C
Flammability:	V2 (according to UL 94)
Approvals:	cURus, cULus, DNV-GL, CE



Part Number	Thread Type	Clamping Range Ø min-max (CR) inches mm	Outer Ø (D) inches mm	Shield Diameter (Ø min) inches mm		Wrenching Flats Cap (SW1) inches	Body (SW2) inches	Thread Diameter (TD) inches	Thread Length (TL) inches	Max. Height (H) inches	UL
PG											
EP2-7	PG 7	0.118 - 0.256	3.0 - 6.5	0.610	0.098	2.5	0.551	0.551	0.492	0.236	0.945
EP2-9	PG 9	0.157 - 0.315	4.0 - 8.0	0.744	0.138	3.5	0.669	0.669	0.598	0.236	1.004
EP2-11	PG 11	0.197 - 0.394	5.0 - 10.0	0.866	0.157	4.0	0.787	0.787	0.732	0.236	1.102
EP2-13	PG 13.5	0.236 - 0.472	6.0 - 12.0	0.965	0.197	5.0	0.866	0.866	0.803	0.256	1.043
EP2-16	PG 16	0.394 - 0.551	10.0 - 14.0	1.043	0.335	8.5	0.945	0.945	0.886	0.256	1.181
EP2-21	PG 21	0.512 - 0.709	13.0 - 18.0	1.299	0.433	11	1.181	1.181	1.114	0.283	1.378
EP2-29	PG 29	0.709 - 0.984	18.0 - 25.0	1.752	0.630	16	1.575	1.575	1.457	0.315	1.594
EP2-36	PG 36	0.866 - 1.26	22.0 - 32.0	2.185	0.787	20	1.969	1.969	1.850	0.354	1.969
EP2-42	PG 42	1.181 - 1.496	30.0 - 38.0	2.520	1.102	28	2.283	2.283	2.126	0.472	2.008
EP2-48	PG 48	1.339 - 1.732	34.0 - 44.0	2.756	1.220	31	2.520	2.520	2.335	0.551	2.165
PG with Long Thread*											
EP2-7L	PG 7	0.118 - 0.256	3.0 - 6.5	0.610	0.098	2.5	0.551	0.551	0.492	0.394	0.945
EP2-9L	PG 9	0.157 - 0.315	4.0 - 8.0	0.744	0.138	3.5	0.669	0.669	0.598	0.394	1.004
EP2-11L	PG 11	0.197 - 0.394	5.0 - 10.0	0.866	0.157	4.0	0.787	0.787	0.732	0.394	1.102
EP2-13L	PG 13.5	0.236 - 0.472	6.0 - 12.0	0.965	0.197	5.0	0.866	0.866	0.803	0.394	1.043
EP2-16L	PG 16	0.394 - 0.551	10.0 - 14.0	1.043	0.335	8.5	0.945	0.945	0.886	0.394	1.181
EP2-21L	PG 21	0.512 - 0.709	13.0 - 18.0	1.299	0.433	11	1.181	1.181	1.114	0.472	1.378
EP2-29L	PG 29	0.709 - 0.984	18.0 - 25.0	1.752	0.630	16	1.575	1.575	1.457	0.472	1.594
EP2-36L	PG 36	0.866 - 1.26	22.0 - 32.0	2.185	0.787	20	1.969	1.969	1.850	0.551	1.969
EP2-42L	PG 42	1.181 - 1.496	30.0 - 38.0	2.520	1.102	28	2.283	2.283	2.126	0.630	2.008
EP2-48L	PG 48	1.339 - 1.732	34.0 - 44.0	2.756	1.220	31	2.520	2.520	2.335	0.709	2.165
NPT											
EN2-3/8	NPT 3/8	0.197 - 0.394	5.0 - 10.0	0.866	0.157	4.0	0.787	0.787	0.675	0.453	1.240
EN2-1/2	NPT 1/2	0.236 - 0.472	6.0 - 12.0	0.965	0.197	5.0	0.866	0.866	0.840	0.512	1.083
EN2-3/4R*	NPT 3/4	0.354 - 0.630	9.0 - 16.0	1.299	0.335	8.5	1.181	1.181	1.050	0.512	1.496
EN2-3/4	NPT 3/4	0.512 - 0.709	13.0 - 18.0	1.299	0.433	11	1.181	1.181	1.050	0.512	1.496
EN2-1	NPT 1	0.709 - 0.984	18.0 - 25.0	1.909	0.630	16	1.575	1.693	1.315	0.512	1.791

* PG version and EN2-3/4R are not NEMA 4X rated

Locknuts need to be purchased separately, see page 54


EMC Cord Grips for Greenhouses

CG EMC-4 Metric / CG EMC-4 PG / CG EMC-4 NPT

Nickel plated brass EMC cable gland, vibration proof

Metric, PG &
NPT Thread

Optimal grounding of shielded
cable, bi-directional cable
installation, impact resistant.

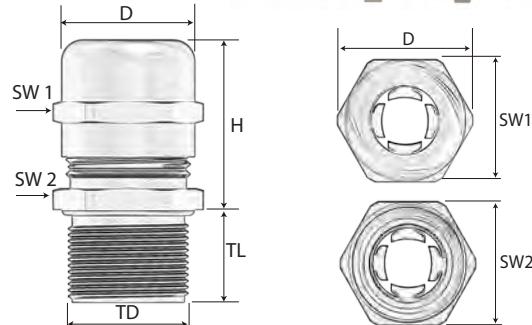

Technical data:

Material:	Brass, Nickel Plated
Contact spring:	Special Copper Alloy
Clamping Insert:	Polyamide 6
Seal:	Chloroprene (CR)
O-Ring:	Neoprene (NBR)
Protection type:	IP 68 - 5 Bar NEMA 4X
Temperature range: permanent:	-20°C to +100°C
intermittent:	-40°C to +150°C
Flammability:	V2 (according to UL 94)
Approvals:	cURus, cULus, VDE, DNV-GL, CE



Part Number	Thread Type	Clamping Range Ø min-max (CR)		Outer Ø (D) inches	Shield Diameter (Ø min)		Wrenching Flats		Thread Diameter (TD) inches	Thread Length (TL) inches	Max. Height (H) inches	UL
Metric												
EM4-12	M12x1.5	0.118 - 0.256	3.0 - 6.5	0.610	0.079	2.0	0.551	0.551	0.472	0.236	1.181	cURus
EM4-16	M16x1.5	0.197 - 0.394	5.0 - 10.0	0.866	0.138	3.5	0.787	0.787	0.630	0.236	1.378	cURus
EM4-20	M20x1.5	0.236 - 0.472	6.0 - 12.0	0.965	0.177	4.5	0.866	0.866	0.787	0.236	1.319	cULus
EM4-20C	M20x1.5	0.295 - 0.551	7.5 - 14.0	1.055	0.217	5.5	0.945	0.945	0.787	0.315	1.634	cULus
EM4-25	M25x1.5	0.394 - 0.709	10.0 - 18.0	1.299	0.276	7.0	1.181	1.181	0.984	0.315	1.752	cULus
EM4-32	M32x1.5	0.630 - 0.984	16.0 - 25.0	1.752	0.472	12	1.575	1.575	1.260	0.354	2.165	cULus
EM4-40	M40x1.5	0.866 - 1.260	22.0 - 32.0	2.185	0.709	18	1.969	1.969	1.575	0.354	2.461	cULus
EM4-50	M50x1.5	1.181 - 1.496	30.0 - 38.0	2.520	1.024	26	2.283	2.283	1.969	0.354	2.913	cULus
EM4-63	M63x1.5	1.339 - 1.732	34.0 - 44.0	2.953	1.181	30	2.520	2.677	2.480	0.551	2.362	cULus
EM4-63C	M63x1.5	1.457 - 2.087	37.0 - 53.0	3.268	1.299	33	2.953	2.953	2.480	0.394	2.953	cULus
PG1*												
EP4-7	PG 7	0.118 - 0.256	3.0 - 6.5	0.650	0.079	2.0	0.551	0.591	0.492	0.236	1.181	-
EP4-11	PG 11	0.197 - 0.394	5.0 - 10.0	0.906	0.138	3.5	0.787	0.827	0.732	0.236	1.378	-
EP4-13	PG 13.5	0.236 - 0.472	6.0 - 12.0	0.965	0.177	4.5	0.866	0.866	0.803	0.256	1.319	-
EP4-16	PG 16	0.295 - 0.551	7.5 - 14.0	1.083	0.217	5.5	0.945	0.984	0.886	0.256	1.634	-
EP4-21	PG 21	0.394 - 0.709	10.0 - 18.0	1.398	0.276	7.0	1.181	1.260	1.114	0.276	1.752	-
EP4-29	PG 29	0.630 - 0.984	16.0 - 25.0	1.752	0.472	12	1.575	1.575	1.457	0.354	2.165	-
EP4-36	PG 36	0.866 - 1.260	22.0 - 32.0	2.185	0.709	18	1.969	1.969	1.850	0.354	2.441	-
EP4-42	PG 42	1.181 - 1.496	30.0 - 38.0	2.618	1.024	26	2.283	2.362	2.126	0.472	2.933	-
EP4-48	PG 48	1.339 - 1.732	34.0 - 44.0	2.953	1.181	30	2.520	2.677	2.335	0.551	2.382	-
NPT**												
EN4-1/4	NPT 1/4	0.118 - 0.256	3.0 - 6.5	0.650	0.079	2.0	0.551	0.591	0.540	0.453	1.181	-
EN4-3/8	NPT 3/8	0.197 - 0.394	5.0 - 10.0	0.866	0.138	3.5	0.787	0.787	0.675	0.453	1.378	-
EN4-1/2	NPT 1/2	0.236 - 0.472	6.0 - 12.0	0.965	0.177	4.5	0.866	0.866	0.840	0.591	1.555	cULus
EN4-1/2C	NPT 1/2	0.295 - 0.551	7.5 - 14.0	1.055	0.217	5.5	0.945	0.945	0.840	0.591	1.634	cULus
EN4-1/2C-2	NPT 1/2	0.295 - 0.551	7.5 - 14.0	1.055	0.217	5.5	0.945	0.945	0.840	0.314	1.634	cULus
EN4-3/4	NPT 3/4	0.394 - 0.709	10.0 - 18.0	1.299	0.276	7.0	1.181	1.181	1.050	0.591	1.713	cULus
EN4-1	NPT 1	0.630 - 0.984	16.0 - 25.0	1.752	0.472	12	1.575	1.575	1.315	0.787	2.126	cULus
EN4-1 1/4	NPT 1 1/4	0.866 - 1.260	22.0 - 32.0	2.185	0.709	18	1.969	1.969	1.660	0.787	2.480	cULus
EN4-1 1/2	NPT 1 1/2	1.181 - 1.496	30.0 - 38.0	2.520	1.024	26	2.283	2.283	1.900	0.866	2.874	cULus
EN4-2	NPT 2	1.339 - 1.732	34.0 - 44.0	2.953	1.181	30	2.520	2.677	2.375	0.866	0.866	cULus

* PG - DNV-GL & CE only

+ NPT - cULus, DNV-GL & CE only

* PG & NPT are not NEMA 4X rated

Locknuts need to be purchased separately, see page 54


Polyamide Locknuts for Greenhouses

Polyamide Locknuts

Hexagonal locknut, black or gray

Metric, PG &
NPT Thread

Hexagonal locknuts made of polyamide, glass fiber reinforced.

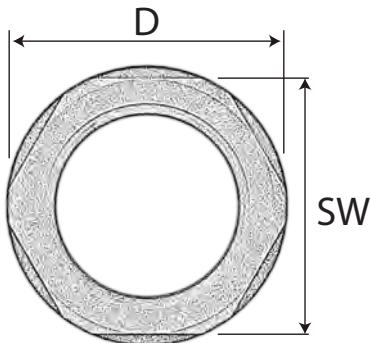

Technical data:

Material:	Polyamide 6 (30% Glass Fiber reinforced)
Color:	RAL 7001 (gray) RAL 9005 (black)
Temperature range: <i>permanent:</i>	-20°C to +100°C
<i>intermittent:</i>	-30°C to +150°C
Flammability:	UL 94 HB



Part Number		Thread Type	Height (H)		Diameter (D)		Wrenching Flats (SW)	
gray	black		inches	mm	inches	mm	inches	mm
PG								
LMG-12	LMB-12	M12x1.5	0.197	5	0.768	19.5	0.709	18
LMG-16	LMB-16	M16x1.5	0.197	5	0.953	24.2	0.866	22
LMG-20	LMB-20	M20x1.5	0.236	6	1.126	28.6	1.024	26
LMG-25	LMB-25	M25x1.5	0.236	6	1.378	35.0	1.260	32
LMG-32	LMB-32	M32x1.5	0.276	7	1.815	46.1	1.614	41
LMG-40	LMB-40	M40x1.5	0.276	7	2.177	55.3	1.969	50
LMG-50	LMB-50	M50x1.5	0.315	8	2.587	65.7	2.362	60
LMG-63	LMB-63	M63x1.5	0.315	8	3.248	82.5	2.953	75
LMG-75	LMB-75	M75x2.0	0.591	15	3.701	94.0	3.346	85
NPT								
LNG-3/8	LNB-3/8	NPT 3/8	0.276	7	0.984	25	0.866	22
LNG-1/2	LNB-1/2	NPT 1/2	0.276	7	1.201	30.5	1.063	27
LNG-3/4	LNB-3/4	NPT 3/4	0.276	7	1.476	37.5	1.299	33
LNG-1	LNB-1	NPT 1	0.276	7	1.819	46.2	1.614	41

Metal Locknuts for Greenhouses

Metal Locknuts / Metal EMC Locknuts

Nickel plated brass locknuts / Nickel plated brass locknuts with grounding teeth


Metric, PG, &
NPT Thread

EMC locknut has grounding teeth to make connection to metal panels or control boxes.

Technical data:

Material:

Brass, Nickel Plated

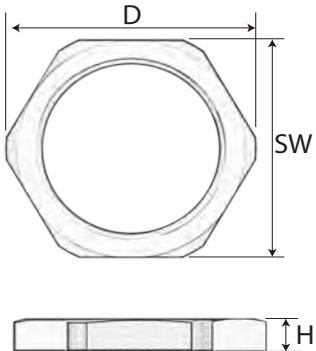

Part Number	Thread Type	Height (H) inches	Diameter (D) inches	Wrenching Flats (SW) inches
Metric-Standard				
LMM-12	M12x1.5	0.110	0.654	0.591
LMM-16	M16x1.5	0.118	0.827	0.748
LMM-20	M20x1.5	0.138	1.043	0.945
LMM-25	M25x1.5	0.157	1.299	1.181
LMM-32	M32x1.5	0.197	1.555	1.417
LMM-40	M40x1.5	0.197	2.008	1.811
LMM-50	M50x1.5	0.197	2.598	2.362
LMM-63	M63x1.5	0.236	3.031	2.756
LMM-75	M75x2.0	0.276	3.528	3.150
LMM-80	M80x2.0	0.315	3.937	3.543
LMM-85	M85x2.0	0.315	4.181	3.740
LMM-90	M90x2.0	0.315	4.409	3.937
PG-Standard				
LPM-7	PG 7	0.110	0.654	0.591
LPM-9	PG 9	0.110	0.787	0.709
LPM-11	PG 11	0.118	0.925	0.827
LPM-13	PG 13.5	0.118	1.004	0.906
LPM-16	PG 16	0.118	1.142	1.024
LPM-21	PG 21	0.138	1.398	1.260
LPM-29	PG 29	0.157	1.772	1.614
LPM-36	PG 36	0.197	2.205	2.008
LPM-42	PG 42	0.197	2.598	2.362
LPM-48	PG 48	0.217	2.776	2.520
NPT-Standard				
LNM-3/8	NPT 3/8	0.197	0.965	0.866
LNM-1/2	NPT 1/2	0.197	1.181	1.063
LNM-3/4	NPT 3/4	0.197	1.437	1.299
LNM-1	NPT 1	0.197	1.831	1.693
LNM-1 1/4	NPT 1 1/4"	0.197	2.087	1.890
LNM-1 1/2	NPT 1 1/2"	0.197	2.402	2.165
LNM-2	NPT 2"	0.217	2.776	2.520

Stainless steel locknuts are available upon request



Vent Glands for Greenhouses

VG Vent PA6 / NPB

Polyamide vent gland, black or gray / Nickel plated brass vent gland


Metric & PG
Thread

Vent glands are used to secure a cable and balance the pressure in an enclosure to protect electronic connections from condensation. They are UL approved and chemical resistant. The vent plugs come in black or gray polyamide or nickel plated brass with different air flow ratings.

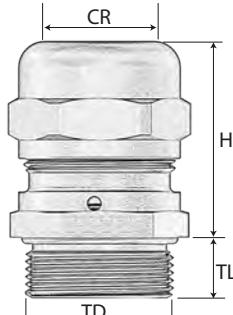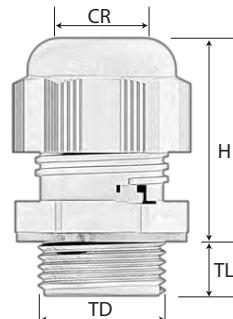

Technical data:

Material:	Brass, Nickel Plated or Polyamide 6
Cap:	Brass, Nickel Plated or Polyamide 6
Vent element:	PTFE
Seal:	Chloroprene (CR)
Washer:	Neoprene (NBR)
Protection type:	IP 66/67
Temperature range:	
permanent:	-20°C to +100°C
intermittent:	-30°C to +150°C
Approvals:	cURus, cCSAus, VDE, DNV-GL, CE

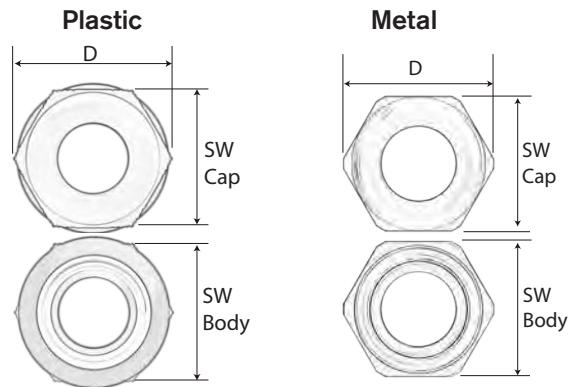

Part Number		Average Air Flow	Water Intrusion	Thread Size	Clamping Range Ø min - max (CR)		Thread Length (TL)	Thread Diameter (TD)	Wrenching Flats Cap & Body (SW)	Outer Diameter (D)	max. Height (H)
Gray	Black	l/h	Pressure bar		inches	mm	inches	inches	inches	inches	inches
Plastic Vent Glands											
VGMG-12	VGMB-12	25	0.1	M12x1.5	0.157 - 0.276	4.0 - 7.0	0.315	0.472	0.748	0.854	1.114
VGPG-9	VGPB-9	25	0.1	PG 9	0.157 - 0.276	4.0 - 7.0	0.315	0.598	0.748	0.854	1.114
VGMG-16	VGMB-16	25	0.1	M16x1.5	0.157 - 0.276	4.0 - 7.0	0.394	0.630	0.748	0.854	1.114
VGPG-11	VGPB-11	25	0.1	PG 11	0.157 - 0.276	4.0 - 7.0	0.315	0.732	0.748	0.980	1.114
VGMG-20	VGMB-20	40	0.1	M20x1.5	0.236 - 0.433	6.0 - 11.0	0.394	0.787	0.945	1.063	1.311
VGPG-13	VGPB-13	40	0.1	PG 13.5	0.236 - 0.433	6.0 - 11.0	0.354	0.803	0.945	1.063	1.311
Metal Vent Glands											
VGMM-12		25	0.1	M12x1.5	0.157 - 0.276	4.0 - 7.0	0.315	0.472	0.669	0.744	1.280
VGPM-7		25	0.1	PG 7	0.157 - 0.276	4.0 - 7.0	0.315	0.492	0.669	0.744	1.280
VGPM-9		25	0.1	PG 9	0.157 - 0.276	4.0 - 7.0	0.315	0.598	0.669	0.744	1.142
VGMM-16		25	0.1	M16x1.5	0.157 - 0.276	4.0 - 7.0	0.315	0.630	0.669	0.744	1.142
VGMM-16L		35	0.1	M16x1.5	0.197 - 0.354	5.0 - 9.0	0.315	0.630	0.787	0.866	1.417
VGPM-11		35	0.1	PG 11	0.197 - 0.354	5.0 - 9.0	0.315	0.732	0.787	0.866	1.417
VGMM-20		50	0.1	M20x1.5	0.236 - 0.433	6.0 - 11.0	0.315	0.787	0.866	0.965	1.280
VGPM-13		50	0.1	PG 13.5	0.236 - 0.433	6.0 - 11.0	0.354	0.803	0.866	0.965	1.280

cCSAus approval for plastic glands only.
VDE approved for metric threads only

Vent Plugs for Greenhouses

VP Vent PA6

Polyamide vent plug, black or gray

Metric Thread
and Quick Fit

Vent plugs are used to balance the pressure in an enclosure to protect electronic connections from condensation. They are UL approved and chemical resistant. The vent plugs come in black or gray polyamide with different air flow ratings.



- Balances pressure difference between inner housing and the outside environment.
- Prevents damage according to pressure differences.
- Prevents the formation of water condensation in tightly-sealed standard housing.
- Membrane properties: hydrophobic, oleophobic.

Technical data:



Body:	Polyamide 6
Cap:	Polyamide 6
Vent element:	Acrylic Co-Polymer on Nylon Support
Seal:	Chloroprene (CR)
Washer:	Neoprene (NBR)
Protection type:	IP 67/68 (for water intrusion pressure oil bar)
Temperature range:	
permanent:	-40°C to +100°C
intermittent:	-45°C to +150°C
Approvals:	cURus, CE





Style A

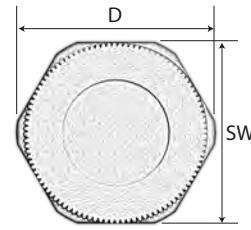



Style B



Style E



Style F



Vent Plugs for Greenhouses

VP Vent PA6

Polyamide vent plug, black or gray

Metric Thread
and Quick Fit

Vent plugs are used to balance the pressure in an enclosure to protect electronic connections from condensation. They are UL approved and chemical resistant. The vent plugs come in black or gray polyamide with different air flow ratings.

- Balances pressure difference between inner housing and the outside environment.
- Prevents damage according to pressure differences.
- Prevents the formation of water condensation in tightly-sealed standard housing.
- Membrane properties: hydrophobic, oleophobic.

Technical data:

Body:	Polyamide 6
Cap:	Polyamide 6
Vent element:	Acrylic Co-Polymer on Nylon Support
Seal:	Chloroprene (CR)
Washer:	Neoprene (NBR)
Protection type:	IP 67/68 (for water intrusion pressure oil bar)
Temperature range:	
permanent:	-40°C to +100°C
intermittent:	-45°C to +150°C
Approvals:	cURus, CE



Part Number		Style	Average Air Flow l/h	Water Intrusion Pressure bar	Thread Size	Thread Length (TL) inches	Thread Diameter (TD) inches	Wrenching Flats (SW) inches	Outer Diameter (D) inches	max. Height (H) inches	UL
Gray	Black										
VPG-01	VPB-01	B	16	0.9	QUICK FIT	0.295	0.217	-	0.728	0.429	-
VPG-02	VPB-02	A	16	0.9	M12x1.5	0.236	0.472	0.669	0.728	0.299	cURus
VPG-02L	VPB-02L	A	16	0.9	M12x1.5	0.394	0.472	0.669	0.728	0.299	cURus
VPG-03	VPB-03	B	25	0.5	QUICK FIT	0.295	0.217	-	0.728	0.429	-
VPG-04	VPB-04	A	25	0.5	M12x1.5	0.236	0.472	0.669	0.728	0.299	cURus
VPG-04L	VPB-04L	A	25	0.5	M12x1.5	0.394	0.472	0.669	0.728	0.299	cURus
VPG-04H	VPB-04H	E	42	0.9	M12x1.5	0.394	0.472	0.945	1.024	0.461	-
VPG-05	VPB-05	E	42	0.9	M16x1.5	0.394	0.630	0.945	1.024	0.461	-
VPG-06	VPB-06	E	42	0.9	M20x1.5	0.394	0.787	0.945	1.024	0.461	-
VPG-07	VPB-07	B	120	0.2	QUICK FIT	0.295	0.217	-	0.728	0.429	-
VPG-08H	VPB-08H	E	120	0.5	M12x1.5	0.394	0.472	0.945	1.024	0.461	-
VPG-08	VPB-08	A	120	0.2	M12x1.5	0.236	0.472	0.669	0.728	0.299	cURus
VPG-08L	VPB-08L	A	120	0.2	M12x1.5	0.394	0.472	0.669	0.728	0.299	cURus
VPG-09	VPB-09	E	120	0.5	M16x1.5	0.394	0.630	0.945	1.024	0.461	-
VPG-10	VPB-10	E	120	0.5	M20x1.5	0.394	0.787	0.945	1.024	0.461	-
VPG-11	VPB-11	F	120	0.9	M40x1.5	0.709	1.575	-	2.177	0.610	-
VPG-12	VPB-12	B	300	0.1	QUICK FIT	0.295	0.217	-	0.728	0.429	-
VPG-13	VPB-13	A	300	0.1	M12x1.5	0.236	0.472	0.669	0.728	0.299	cURus
VPG-13L	VPB-13L	A	300	0.1	M12x1.5	0.394	0.472	0.669	0.728	0.299	cURus
VPG-14	VPB-14	F	375	0.5	M40x1.5	0.709	1.575	-	2.185	0.610	-
VPG-15	VPB-15	E	450	0.2	M12x1.5	0.394	0.472	0.945	1.024	0.461	-
VPG-16	VPB-16	E	450	0.2	M16x1.5	0.394	0.630	0.945	1.024	0.461	-
VPG-17	VPB-17	E	450	0.2	M20x1.5	0.394	0.787	0.945	1.024	0.461	-
VPG-18	VPB-18	E	750	0.1	M12x1.5	0.394	0.472	0.945	1.024	0.461	-
VPG-19	VPB-19	E	750	0.1	M16x1.5	0.394	0.630	0.945	1.024	0.461	-
VPG-20	VPB-20	E	750	0.1	M20x1.5	0.394	0.787	0.945	1.024	0.461	-
VPG-21	VPB-21	F	1350	0.2	M40x1.5	0.709	1.575	-	2.177	0.610	-
VPG-22	VPB-22	F	2200	0.1	M40x1.5	0.709	1.575	-	2.177	0.610	-

Vent Plugs for Greenhouses


VP Vent Plug Metal

Stainless steel vent plug

Metric & PG
Thread

Vent plugs are used to balance the pressure in an enclosure to protect electronic connections from condensation. They are UL approved and chemical resistant. The vent plugs are stainless steel AISI 303 and come with different air flow ratings.


Style C

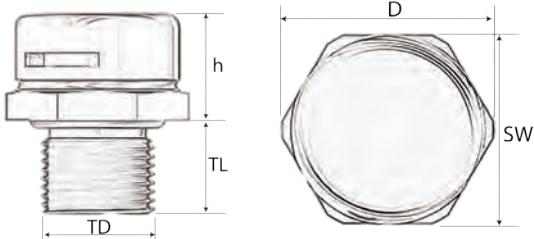

Style D




h
TL

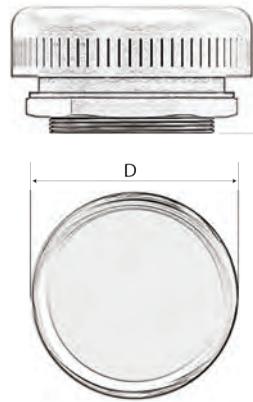

Style G



h
TL



Technical data:

Body:	Stainless steel AISI 303
Cap:	Stainless steel AISI 303
Vent element:	Acrylic Co-Polymer on Nylon Support
Seal:	Chloroprene (CR)
Washer:	Neoprene (NBR)
Protection type:	IP 67/68 (for water intrusion pressure oil bar)
Temperature range: permanent:	-40°C to +100°C
intermittent:	-45°C to +150°C
Approvals:	cURus




Part Number	Style	Average Air Flow l/h	Water Intrusion Pressure bar	Thread Size	Thread Length (TL) inches	Thread Diameter (TD) inches	Wrenching Flats (SW) inches	Outer Diameter (D) inches	max. Height (H) inches	UL
VPM-01	G	4	0.9	M4x0.7	0.118	0.157	-	0.484	0.106	-
VPM-02	G	7	0.5	M4x0.7	0.118	0.157	-	0.484	0.106	-
VPM-03	C	16	0.9	M12x1.5	0.236	0.472	0.669	0.740	0.433	cURus
VPM-03L	C	16	0.9	M12x1.5	0.394	0.472	0.669	0.740	0.433	cURus
VPM-04	C	16	0.9	PG 7	0.413	0.492	0.669	0.740	0.433	cURus
VPM-05	C	16	0.9	M16x1.5	0.236	0.630	0.709	0.787	0.472	-
VPM-05H	C	16	0.9	M16x1.5	0.236	0.630	0.709	0.787	0.630	-
VPM-06	C	16	0.9	M20x1.5	0.236	0.787	0.866	0.965	0.512	-
VPM-06H	C	16	0.9	M20x1.5	0.236	0.787	0.866	0.965	0.669	-
VPM-07	C	25	0.5	M12x1.5	0.236	0.472	0.669	0.740	0.433	cURus
VPM-07L	C	25	0.5	M12x1.5	0.394	0.472	0.669	0.740	0.433	cURus
VPM-08	C	25	0.5	PG 7	0.413	0.492	0.669	0.740	0.433	cURus
VPM-09	C	25	0.5	M16x1.5	0.236	0.630	0.709	0.787	0.472	-
VPM-09L	C	25	0.5	M16x1.5	0.236	0.630	0.709	0.787	0.630	-
VPM-10	C	25	0.5	M20x1.5	0.236	0.787	0.866	0.965	0.512	-
VPM-10H	C	25	0.5	M20x1.5	0.236	0.787	0.866	0.965	0.669	-
VPM-11	G	35	0.2	M4x0.7	0.118	0.157	-	0.484	0.106	-
VPM-12	G	100	0.1	M4x0.7	0.118	0.157	-	0.484	0.106	-
VPM-13	C	120	0.2	M12x1.5	0.236	0.472	0.669	0.740	0.433	cURus
VPM-13L	C	120	0.2	M12x1.5	0.394	0.472	0.669	0.740	0.433	cURus
VPM-14	C	120	0.2	PG 7	0.413	0.492	0.669	0.740	0.433	cURus
VPM-15	C	120	0.2	M16x1.5	0.236	0.630	0.709	0.787	0.472	-
VPM-15H	C	120	0.2	M16x1.5	0.236	0.630	0.709	0.787	0.630	-
VPM-16	C	120	0.2	M20x1.5	0.236	0.787	0.866	0.965	0.512	-
VPM-16H	C	120	0.2	M20x1.5	0.236	0.787	0.866	0.965	0.669	-
VPM-17	D	120	0.9	M40x1.5	0.394	1.575	-	2.283	0.807	cURus
VPM-18	C	300	0.1	M12x1.5	0.236	0.472	0.669	0.740	0.433	cURus
VPM-18L	C	300	0.1	M12x1.5	0.394	0.472	0.669	0.740	0.433	cURus
VPM-19	C	300	0.1	PG 7	0.413	0.492	0.669	0.740	0.433	cURus
VPM-20	C	300	0.1	M16x1.5	0.236	0.630	0.709	0.787	0.472	-
VPM-20H	C	300	0.1	M16x1.5	0.236	0.630	0.709	0.787	0.630	-
VPM-21	C	300	0.1	M20x1.5	0.236	0.787	0.866	0.965	0.512	-
VPM-22	D	375	0.5	M40x1.5	0.394	1.575	-	2.283	0.807	cURus
VPM-23	D	1350	0.2	M40x1.5	0.394	1.575	-	2.283	0.807	cURus
VPM-24	D	2200	0.1	M40x1.5	0.394	1.575	-	2.283	0.807	cURus

Product Range

Production possibilities

Flexible cables and wires "Made in Germany"

As a leading manufacturer we develop and produce cables for industrial purposes. Our wide range of materials offers a lot of possibilities for your individual product requirement. The following survey shows an extract of our production possibilities:

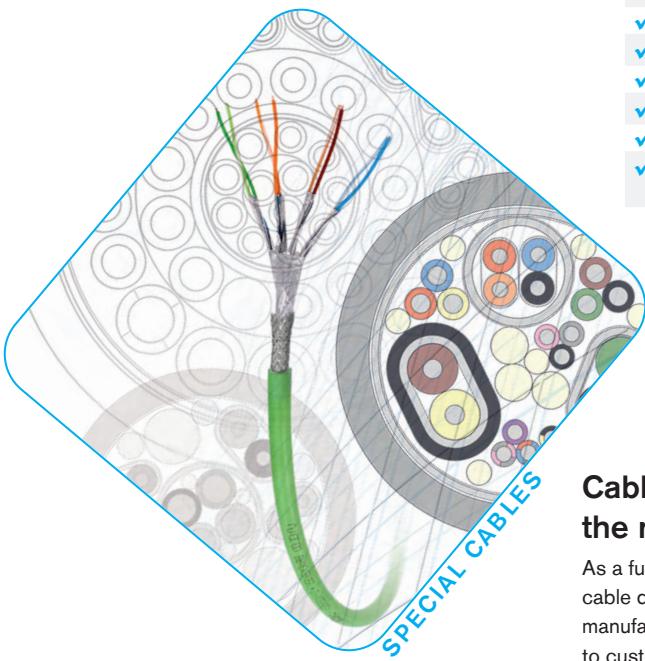

Conductor Materials:

- ✓ bare copper
- ✓ tinned copper
- ✓ silver plated copper
- ✓ nickel plated copper
- ✓ nickel
- ✓ nickel pure
- ✓ compensating cable alloys

Insulation and Jacketing Materials:

- ✓ PVC
- ✓ Polyethylene
- ✓ Polypropylene
- ✓ Polyurethane
- ✓ TPE
- ✓ SABIX® (zero halogen)
- ✓ Besilen® - Silicone
- ✓ FEP, ETFE, PFA, PTFE
- ✓ PI foil
- ✓ Fiberglass

Temperature Ranges:

- Thermoplastic Elastomers
✓ -50°C up to +145°C
- SABIX®
✓ -50°C up to +220°C
- Besilen® - Silicone
✓ -40°C up to +220°C
- FEP, ETFE, PFA
✓ -90°C up to +260°C
- Fiberglass
✓ up to +600°C

Conductors:


- ✓ cross sections 0.055 - 300 mm²
- ✓ unshielded and shielded over 100 conductors



Cable assemblies directly from the manufacturer SAB:

As a full service partner, we are able to offer cable design and production as well as the manufacturing of cable assemblies according to customer's request. Please trust on our experience for decades in the treatment of cables and connectors.


- ✓ cable assemblies according to customer's demands
- ✓ complete cable assemblies
- ✓ UL certified assemblies
- ✓ helix cables
- ✓ HV measuring assemblies

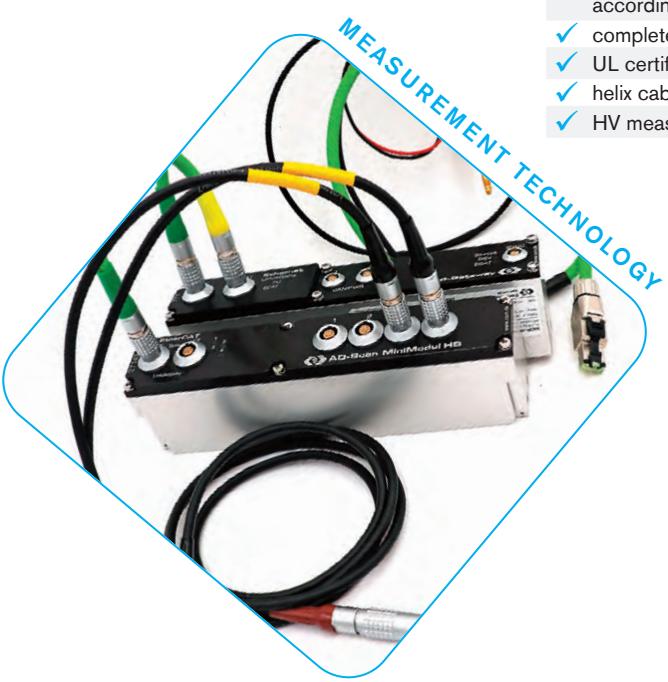

Measuring technology for industrial applications

Manufacturer of temperature sensors for industrial applications with 75 years of experience!

- ✓ mineral insulated thermocouples
- ✓ mineral insulated resistance thermometers
- ✓ temperature sensors
- ✓ mobile high voltage measuring technology
- ✓ temperature sensors for vehicle testing

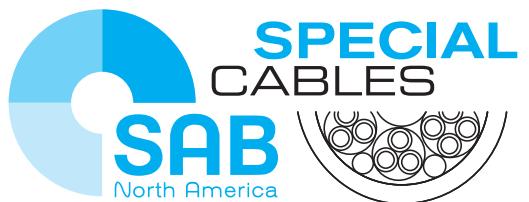

344 Kaplan Drive
Fairfield, NJ 07004
Toll Free: 866-722-2974
www.sabcable.com
info@sabcable.com