


CABLES FOR ROBOTS



www.sabcable.com
866-722-2974 ■ info@sabcable.com

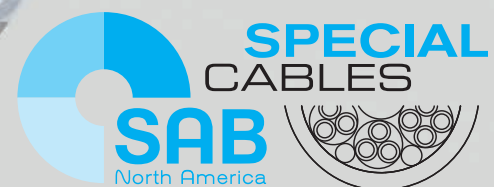

Cables for Robots

SAB North America is a focused supplier for the automation, aerospace, medical, high temperature, and robotics industries, providing cable solutions that meet, exceed, and set new standards in the flexible cable market. In addition to flexible cable products, we offer an extensive inventory of high-quality cable accessories, including cord grips, grounding glands and other accessories that complement our flexible control and automation cables.


Whatever the need may be, look to SAB North America for Special Cables that can, for example, help minimize maintenance costs and increase productivity, reduce downtime, and solve specific problems. Here is a small sample of some of the challenges that Special Cables from SAB North America can help address:

- Hybrid designs for multiple functions
- Harsh environments
- Difficult applications
- Industry-specific requirements



At SAB North America, we offer cables that are perfect for the high mechanical stresses found in robotics applications. These cables can withstand millions of alternating bending cycles, as well as tensile and torsional stress. They also meet requirements relating to temperature, oil and chemical resistance. The enduring quality of SAB robotic automation cables are quietly at work behind the scenes on assembly lines & factory floors. Machine builders and Tier 1 & Tier 2 suppliers to the automotive industry entrust SAB North America to build cables that thrive in harsh environments. Communication, control & power cables are literally the veins & arteries that make your machines tick. Don't allow inferior cables to compromise your equipment.

Whether you're a valued distribution partner, an automation house, an integrator, or a contractor to the automobile manufacturer, rest assured that our cables are reliable to maximize production efficiencies. SAB brings world class performance & 75 years of ingenuity to the table.

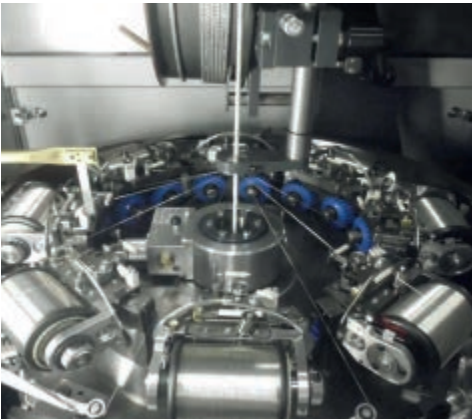


SAB Advantage...We make it Easy

- Engineering & technical assistance
- Cut to length with no cut charges
- Prepaid freight within US for orders over \$2,500
- Specialty cable designs (1500 ft minimum)
- No minimum on orders from stock
- Free drop shipments (no surcharges)
- 24-hour shipments from stock
- Cord Grips for securing cables

Cables for Robots

	page
■ Welding cables for robot applications	6
■ Welding cables for robot applications, UL recognized, CSA approved 	7
■ Control cable for welding guns	8
■ Control cables	10
■ Robot motor cables	12
■ KSR cables - constant welding current control	13
■ Transmission cables/Encoder cables, UL recognized, CSA approved 	14
■ Robot hybrid cable	15
■ Robot multibus cable, UL recognized 	16
■ Hybrid cables	17
■ Power cable 5 x 1.5 mm ²	18
■ Optical waveguide rugged line cables	19
■ RT profinet cables CAT 5	20
■ RT Ethernet cables CAT 6A	21
■ RT hybrid Ethernet cables CAT 6	22
■ Our cable harnessing workshop	23

SAB enjoys a distinguished history partnering with the Automotive Industry worldwide. The high stress demands of the automotive vertical markets are a natural fit for our brand of high-performance cables.

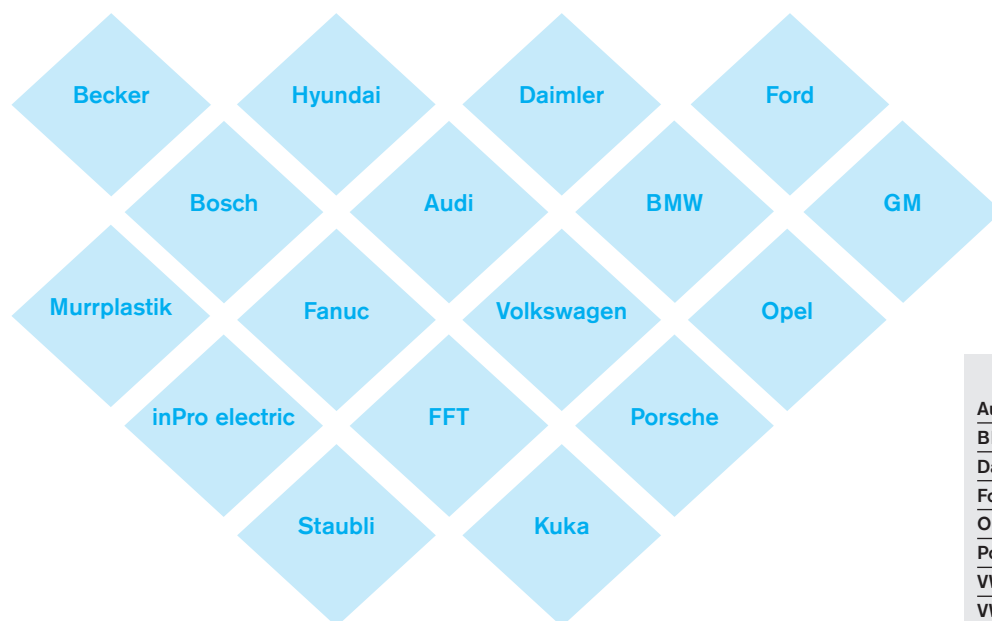

	Supplier no.:
Audi	1917/0
BMW	609-213-10
Daimler	102 218 10
Ford	DJM5A
Opel	1 950 428
Porsche	11 901
VW	1917-0
VW Mexico	600 200 57 70


Cables for Robots

Applications





Grafik: Murrplastik Systemtechnik, Oppenweiler

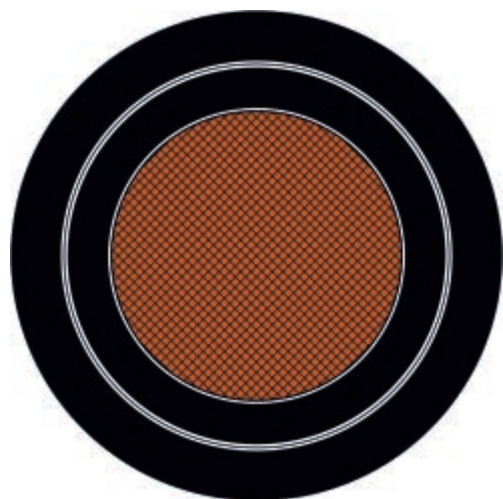

Construction:

Conductor:	bare copper strands acc. to IEC 60228
Jacket material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2

item no.	dimension mm ²	color-coding	outer- $\varnothing$ ≈ mm
07619051	1 x 16.0	bk/bk	10.1
07619052	1 x 25.0	bk/bk	11.1
07619050	1 x 25.0	gnye/bk	11.1
07619048	1 x 35.0	bk/bk	13.3
07619072	1 x 35.0	gnye/bk	13.3
07619054	1 x 50.0	bk/bk	15.8
07619096	1 x 95.0	bk/bk	20.7


Other dimensions and colors are possible on request.



Preferred type

Technical Data:

Operating voltage	Testing voltage	Temperature range	Min. bending radius	Halogen-free	Absence of harmful substances
750 V (DC)	2000 V (AC)	flexible application: -40/+90°C	recommended: 7.5 x O.D.	acc. to IEC 60754-1 + VDE 0482-754-1	acc. to RoHS directive of the European Union

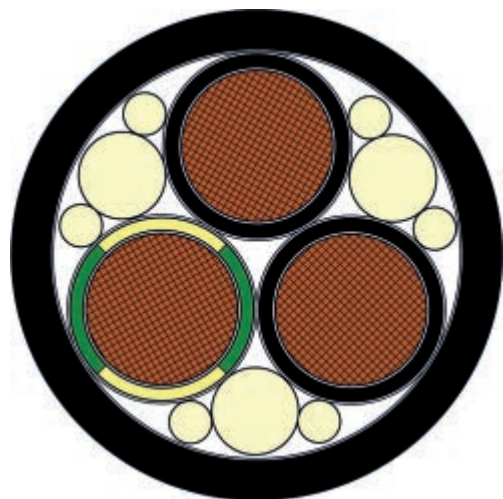

Construction:

Conductor:	bare copper strands acc. to IEC 60228
Insulation:	PUR
Color code:	black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334, green-yellow ground from 3 conductors
Jacket material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Jacket color:	black (RAL 9005)

item no.	dimension mm ²	outer- $\varnothing$ ≈ mm
07749111	3 x 16.0	19.3
07749084	3 x 25.0	23.3
07749085	3 x 35.0	26.6
07749088	3 x 50.0	30.8

Other dimensions and colors are possible on request.

Technical Data:

Operating voltage	Testing voltage	Temperature range	Min. bending radius	Halogen-free	Absence of harmful substances
≤ 16.0 mm ² = 500 V (DC) ≥ 25.0 mm ² = 750 V (DC)	≤ 16.0 mm ² = 1500 V (AC) ≥ 25.0 mm ² = 2000 V (AC)	flexible application: -40/+90°C	recommended: 7.5 x O.D.	acc. to IEC 60754-1 + VDE 0482-754-1	acc. to RoHS directive of the European Union



Construction:

Conductor:	copper strands acc. to IEC 60228
Jacket material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2

item no.	dimension mm ²	color-coding	outer-ø ≈ mm
37689069	1 x 10.0	bk/gnye	7.0
37689010	1 x 16.0	bk/gnye	8.9
03909094	1 x 25.0	gnye/bk	11.1
03909602	1 x 25.0	bk/bk	11.1
03909604	1 x 35.0	bk/bk	13.3
03909605	1 x 35.0	bk/gnye	13.3
03909582	1 x 50.0	bk/bk	15.8
03909583	1 x 70.0	bk/bk	18.0

Other dimensions and colors are possible on request.

Technical Data:

Operating voltage	Voltage UL/CSA	Testing voltage	Temperature range	Min. bending radius	Halogen-free	Absence of harmful substances
750 V (DC)	1000 V	10000 V	flexible application: -40/+90°C UL: up to +80°C	recommended: 7.5 x O.D.	acc. to IEC 60754-1 + VDE 0482-754-1	acc. to RoHS directive of the European Union



Foto: Murrplastik Systemtechnik GmbH



Construction:

Conductor:	bare copper strands acc. to IEC 60228
Insulation:	TPE
Color code:	white conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334 and a green-yellow ground
Jacket material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2 with matte surface
Jacket color:	black (RAL 9005)

item no.	dimension mm ²	outer-ø ≈ mm
07969081	5 x (2 x 0.75) D + 22 x 0.75	16.0

Other dimensions and colors are possible on request.

Nominal voltage	Testing voltage	Temperature range	Min. bending radius	Absence of harmful substances
U ₀ /U 300/500 V	conductor/conductor 2000 V (AC) conductor/shielding 2000 V (AC)	flexible application: -40/+80°C	recommended: 10 x O.D.	acc. to RoHS directive of the European Union

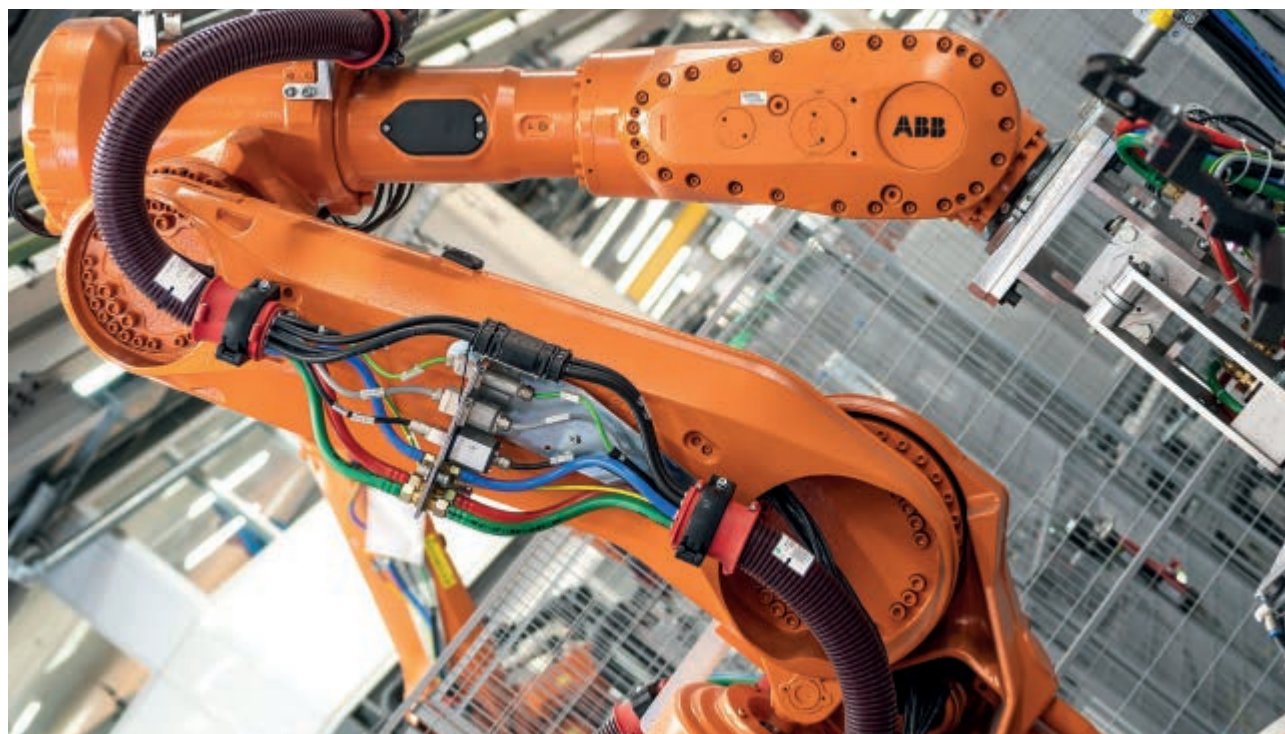


Foto: Becker GmbH, Dülmen



Construction:

Conductor:	bare copper strands acc. to IEC 60228
Insulation:	TPE
Color code:	white conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334 and a green-yellow ground
Jacket material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Jacket color:	sky blue (RAL 5015)

item no.	dimension mm ²	outer-ø ≈ mm
03990157	3 x 1.0 + 4 x 0.5 + 3 x 3 x 0.5 + (2 x 0.5) D	12.1

Other dimensions and colors are possible on request.

Technical Data:


Peak operating voltage	Testing voltage	Temperature range	Min. bending radius	Absence of harmful substances
max. 500 V	conductor/conductor 1500 V conductor/shielding 1200 V	flexible application: -40/+90°C	recommended: 10 x O.D.	acc. to RoHS directive of the European Union



Further welding gun cables on request!



Foto: KUKA AG

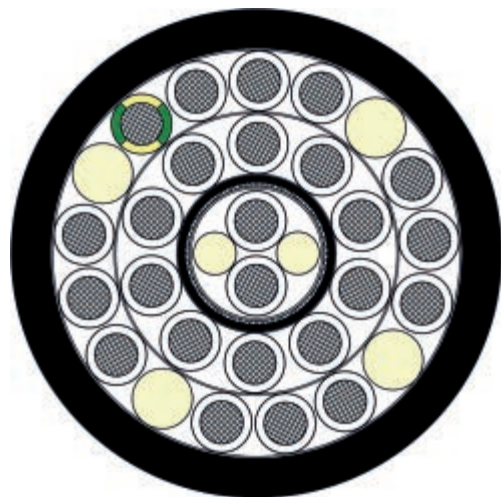

Construction:


Conductor:	tinned copper strands acc. to IEC 60228
Insulation:	TPE
Color code:	white conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334 and a green-yellow ground
Inner jacket:	TPE
Jacket material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Jacket color:	black (RAL 9005)

item no.	dimension mm ²	outer-ø ≈ mm
07649065	23 x 1.0 + (2 x 1.0) D	13.2
07649079	16 x 1.0 + (2 x 1.0) D	13.4

Other dimensions and colors are possible on request.

Technical Data:

Peak operating voltage	Testing voltage	Temperature range	Min. bending radius	Absence of harmful substances
max. 600 V	conductor/conductor 2000 V conductor/shielding 1200 V	flexible application: -40/+90°C	recommended: 10 x O.D.	acc. to RoHS directive of the European Union

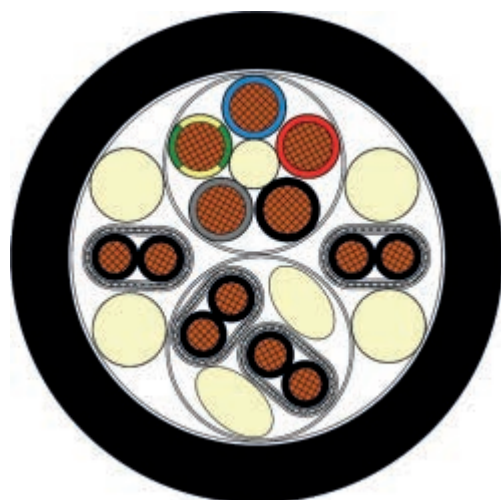

Construction:


Conductor:	bare copper strands acc. to IEC 60228
Insulation:	TPE
Color code:	colored acc. to specification
Jacket material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Jacket color:	black (RAL 9005)

item no.	dimension mm ²	outer-ø ≈ mm
07969210	5 x 1.0 + 4 x (2 x 0.5) D	13.7

Other dimensions and colors are possible on request.

Technical Data:

Min. bending radius	Torsion angle	Temperature range	PWIS uncritical	Absence of harmful substances
recommended: 10 x O.D.	up to ±180°/0.5 m	flexible application: -40/+90°C	all our robot cables are free from paint-wetting impairment substances	acc. to RoHS directive of the European Union

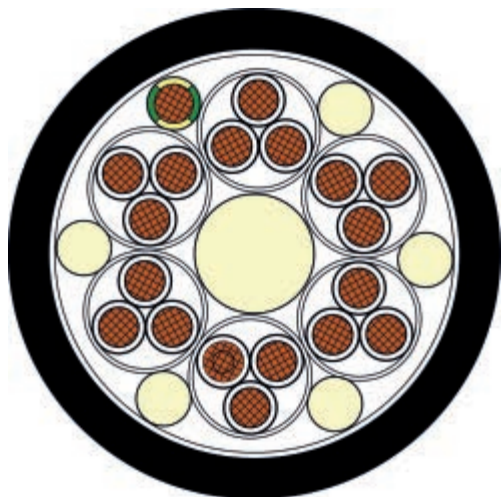

Construction:

Conductor:	bare copper strands acc. to IEC 60228
Insulation:	TPE
Color code:	white conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334 and a green-yellow ground
Jacket material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Jacket color:	black (RAL 9005)

item no.	dimension mm ²	outer-ø ≈ mm
07609151	19 x 0.75	12.4
07609056	19 x 1.00	13.3

Other dimensions and colors are possible on request.

Technical Data:

Nominal voltage	Testing voltage	Temperature range	Min. bending radius	Absence of harmful substances
max. 350 V	conductor/conductor 1500 V	flexible application: -40/+90°C	recommended: 10 x O.D.	acc. to RoHS directive of the European Union

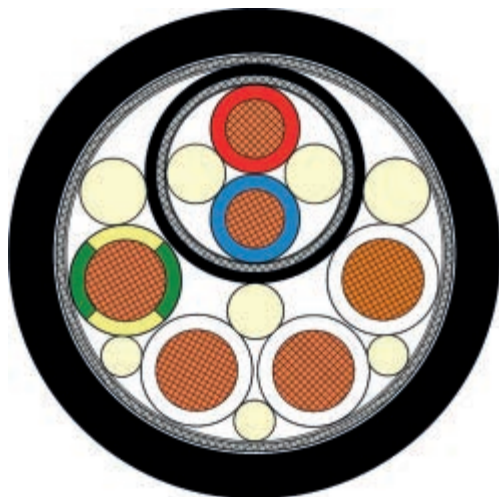


Foto: KUKA AG



**You haven't found
your special cable?**

Please contact our specialists!



Construction:

Conductor:	bare copper strands acc. to IEC 60228
Insulation:	TPE
Color code:	acc. to specification
Jacket material:	PUR, TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Jacket color:	black (RAL 9005)

item no.	dimension mm ²	outer-ø ≈ mm
07649120	4 x 0.75 + 2 x (2 x 0.34)	9.7
07799043	4 x 2.5 + 2 x 1.0	12.1
08419193	4 x 2.5 + (2 x 1.0) C	12.1
08419202	4 x 2.5 + (2 x 1.5) C	12.9

Technical Data:

Nominal voltage	Temperature range	Halogen-free	Absence of harmful substances
Uo/U 450/750 V	flexible application: -40/+90°C	acc. to IEC 60754-1 + VDE 0482-754-1	acc. to RoHS directive of the European Union




Our testing machines



**Further
robot motor cables
on request!**

Our modern testing machines comply with the current standards of automotive industry and enable us to reproduce nearly all customer-specific requirements.



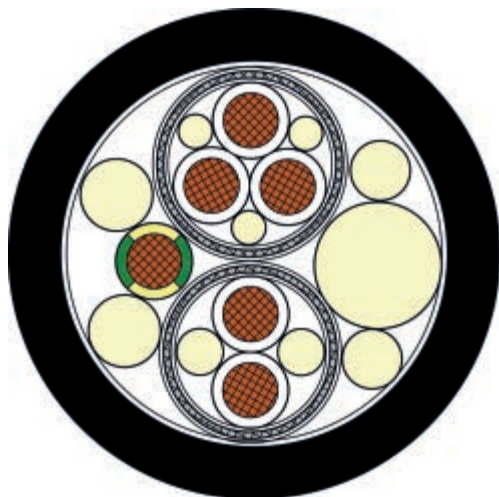

Construction:

Conductor:	copper strands acc. to IEC 60228
Insulation:	TPE
Color code:	acc. to specification
Jacket material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Jacket color:	black (RAL 9005)

item no.	dimension mm ²	outer-ø ≈ mm
07959035	(2 x 0.5) D + (2 x 0.5) D	8.8
07609055	(2 x 0.5) D + 2 x 0.5	8.2
07969101	(3 x 1.0) D + (2 x 1.0) D + 1 x 1.0	10.4
07969217	4 x (2 x 0.50) D + 1 x 0.50	9.6
07849074	6 x 0.75 + (3 x 0.75) D	9.8
07849212	2 x (2 x 0.75) D + (3 x 0.75) D	10.3
07649086	1 x (2 x 0.50) D + 7 x 1.0	9.1

Other dimensions and colors are possible on request.


Technical Data:

PWIS uncritical	Temperature range	Min. bending radius	Absence of harmful substances
all our robot cables are free of paint-wetting interfering substances	flexible application: -40/+90°C	recommended: 10 x O.D.	acc. to RoHS directive of the European Union



**Further KSR cables
on request!**



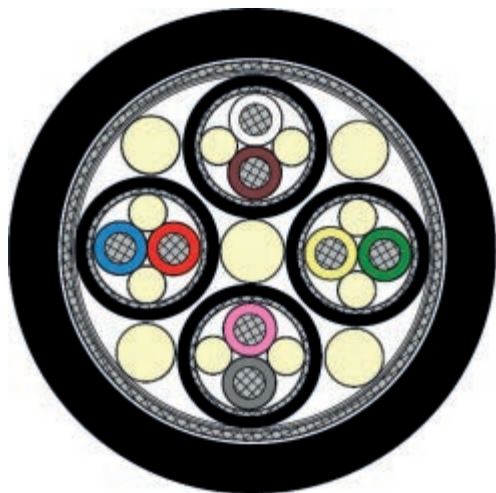

Construction:


Conductor:	tinned copper strands, fine wires acc. to IEC 60228
Color code:	with reference to DIN 47100
Stranding:	twisted pairs wrapped with tinned copper wires
Inner jacket:	TPE
Stranding:	pairs together
Total shield:	wrapped with tinned copper wires
Jacket material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Jacket color:	black (RAL 9005)

item no.	dimension mm ²	outer-ø ≈ mm
03909449	[4 x (2 x 0.25) D] D	9.1

Other dimensions and colors are possible on request.

Technical Data:

Peak operating voltage	PWIS uncritical	Halogen-free	Temperature range	Min. bending radius	Absence of harmful substances
max. 350 V	free of paint-wetting interfering substances	acc. to IEC 60754-1 + VDE 0482-754-1	flexible application: -40/+70°C	recommended: 10 x O.D.	acc. to RoHS directive of the European Union

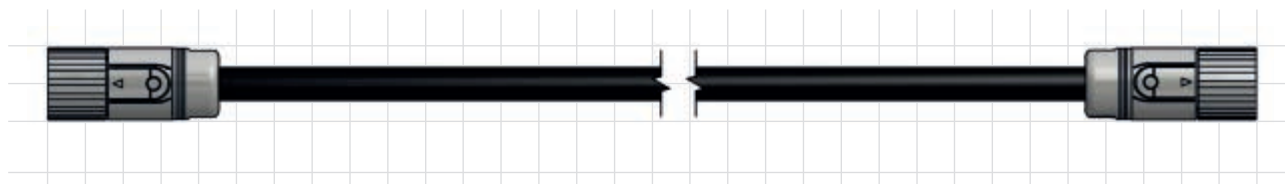

Construction:



Conductor:	bare copper strands, fine wires acc. to IEC 60228
Insulation:	TPE
Color code:	with reference to DIN 47100
Stranding:	conductors twisted to pairs, pairs in layers
Shielding:	wrapped with tinned copper wires
Jacket material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Jacket color:	black (RAL 9005)

item no.	dimension mm ²	outer-ø ≈ mm
07899041	8 x (2 x 0.22) D	12.2
07969237	8 x 2 x 0.25	8.9

Other dimensions and colors are possible on request.

Technical Data:

Peak operating voltage	Testing voltage	Temperature range	Min. bending radius	Torsion angle	Absence of harmful substances
max. 350 V	conductor/conductor 1500 V conductor/shielding 1200 V	flexible application: -40/+90°C	recommended: 10 x OD	up to ±180°/0.5 m	acc. to RoHS directive of the European Union



Construction:

Conductor:	bare copper strands acc. to IEC 60228
Insulation:	special Polymer / TPE
Color code:	with reference to DIN 47100 + black, blue, red, brown, green-yellow
Jacket material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Jacket color:	red lilac (RAL 4001)

item no.	dimension mm ²	outer-ø ≈ mm
03679048	4 x 1.0 + 5 x 2 x 0.25 + 1 x 1.0	13.2

Other dimensions and colors are possible on request.

Technical Data:

Nominal voltage	Testing voltage	Temperature range	Min. bending radius	Absence of harmful substances
max. 350 V	conductor/conductor 1700 V conductor/shielding 1000 V	flexible application: -40/+70°C	recommended: 10 x O.D.	acc. to RoHS directive of the European Union



**You haven't found
your special cable?**

Please contact our specialists!



Foto: KUKA AG





Construction:

Conductor:	bare resp. tinned copper strands acc. to IEC 60228
Jacket material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Jacket color:	red lilac (RAL 4001)




item no.	dimension mm ²	outer-ø ≈ mm
06169028	$2 \times (2 \times 0.25) D + 2 \times (2 \times 0.34) D + 1.0 + (2 \times 0.29) D + 2 \times (2 \times 1.0) D$	13.9

Other dimensions and colors are possible on request.

Technical Data:


Operating voltage	Voltage UL	Testing voltage	Temperature range	Min. bending radius	Absence of harmful substances
max. 350 V	30 V	conductor/conductor 1000 V conductor/shielding 700 V	flexible application: -40/+70°C UL: up to +80°C	recommended: 12 x O.D.	acc. to RoHS directive of the European Union

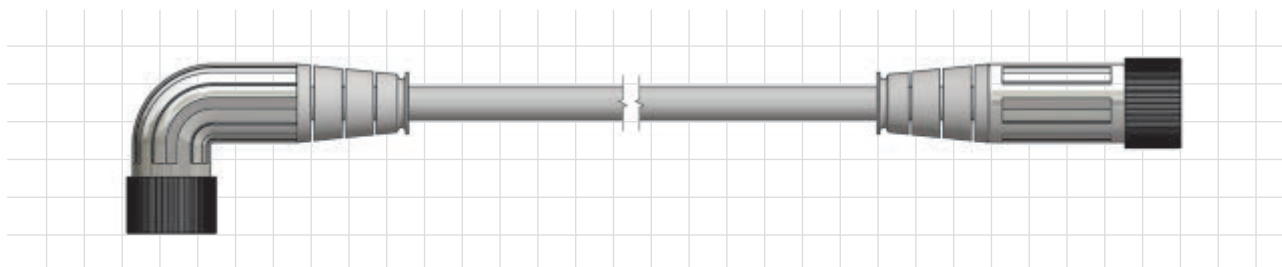




item no.	dimension mm ²	outer-ø ≈ mm
06259019	(2 x 0.34) D CB + 3 x (2 x 0.50) D + 1 x 0.50	9.4
07969217	4 x (2 x 0.50) D + 1 x 0.50	9.7
07969238	4 x (2 x 0.25) D + (2 x 0.50) D	10.4
16399009	4 x (2 x AWG 24) D Cat.6 + (4 x 0.50) D	11.6

Other dimensions and colors are possible on request.

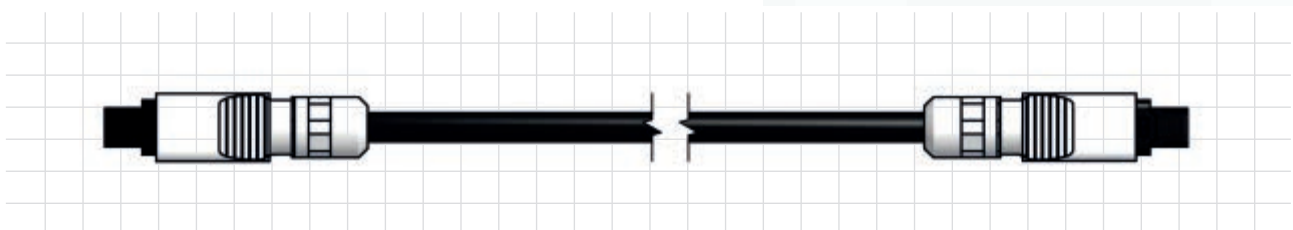

Power cable

5 x 1.5 mm²

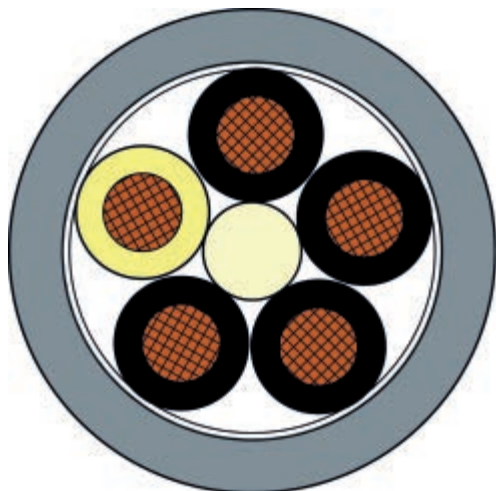

item no.	dimension mm ²	outer-ø ≈ mm
07379005	5 x 1.5	9.9
Other dimensions and colors are possible on request.		



We assemble our cables with
your requested plugs even for small quantities.
Please contact us!

Push-Pull




7/8"



M12



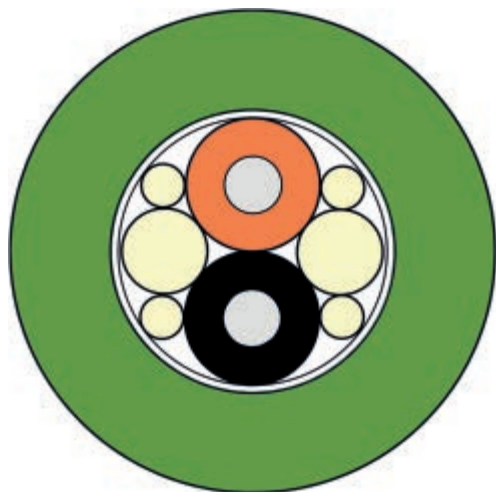

Construction:

Optical waveguide:	POF - polymer optical fiber
Color code:	black + orange
Jacket material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Jacket color:	06649001 blazing red (RAL 3000) 06719013 green (RAL 6018)

item no.	dimension	color	outer- $\varnothing$ $\approx$ mm
06649001	2 x POF	red	8.0
06719013	2 x POF	green	8.0


Other dimensions and colors are possible on request.

Technical Data:

Temperature range	Min. bending radius	Absence of harmful substances
flexible application: -20/+70°C	POF mind. 30 mm recommended for the complete cable: 10 x O.D.	acc. to RoHS directive of the European Union



Foto: Becker GmbH, Dülmen

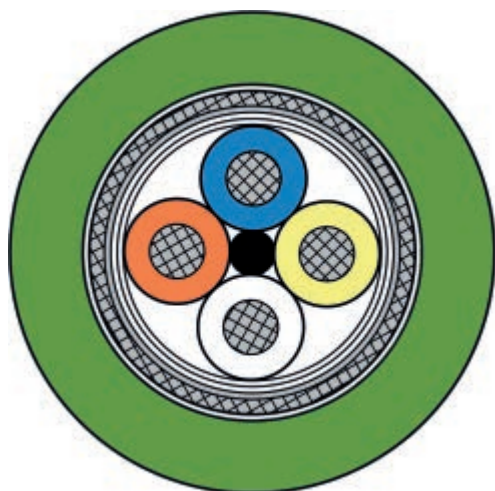

Construction:

Conductor:	tinned copper strands acc. to IEC 60228
Color code:	white, blue, orange, yellow
Stranding:	twisted paires, resp. twisted to star quad
Jacket material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Jacket color:	green (RAL 6018)

item no.	dimension mm ²	category	outer-ø ≈ mm	stranding
06689001	2 x 2 x 22 AWG	CAT 5	7.0	star quad
06689039	2 x 2 x 22 AWG	CAT 5	7.8	paired

Other dimensions and colors are possible on request.

Technical Data:


Peak operating voltage	Testing voltage	Temperature range	Torsion angle	Absence of harmful substances
max. 350 V	conductor/conductor 1500 V conductor/shielding 1200 V	flexible application: -30/+70°C	recommended: ±180°/m	acc. to RoHS directive of the European Union



Type R

We assemble our cables with connectors of all well-known manufacturers



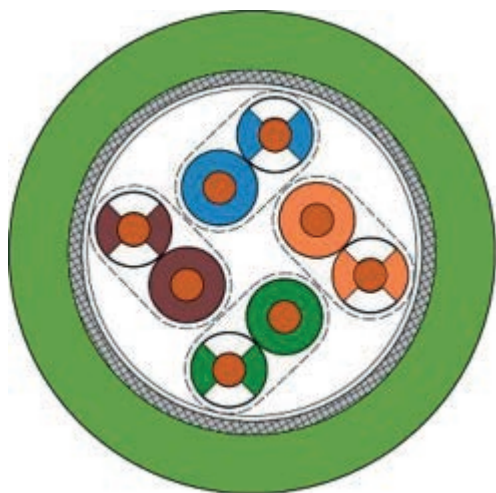

Construction:

Conductor:	copper strands acc. to IEC 60228
Color code:	colored acc. to specification
Stranding:	conductors twisted to pairs
Jacket material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Jacket color:	green (RAL 6018)

item no.	dimension mm ²	category	outer- $\varnothing$ $\approx$ mm	stranding
16874631	4 x 2 x 26 AWG	CAT 6A	7.1	paired

Other dimensions and colors are possible on request.

Technical Data:

Peak operating voltage	Testing voltage	Temperature range	Torsion angle	Absence of harmful substances
max. 90 V	conductor/conductor 2000 V conductor/shielding 2000 V	flexible application: -30/+70°C	recommended: $\pm 180^\circ/\text{m}$	acc. to RoHS directive of the European Union





Construction:

Conductor:	bare copper strands acc. to IEC 60228
Insulation:	4 x 2 x AWG 26: FEP 4 x 1.0 mm ² : TPE
Color code:	4 x 2 x AWG 26: white-blue/blue, white-orange/orange, white-green/green, white-brown/brown 4 x 1.0 mm ² : black conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334
Jacket material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Jacket color:	black (RAL 9005)

item no.	dimension mm ²	outer-ø ≈ mm
06949001	4 x 2 x AWG 26 + 4 x 1.0	12.6


Other dimensions and colors are possible on request.

Technical Data:

Peak operating voltage	Nominal voltage	Testing voltage	Temperature range	Min. bending radius	Absence of harmful substances
4 x 2 x AWG 26: max. 350 V	4 x 1.0 mm ² : 300/500 V	4 x 2 x AWG 26: conductor/conductor 1500 V conductor/shielding 1200 V 4 x 1.0 mm ² : conductor/conductor 2000 V	flexible application: -40/+90°C	recommended: 10 x O.D.	acc. to RoHS directive of the European Union



**Teach Pendant cables
on request!**

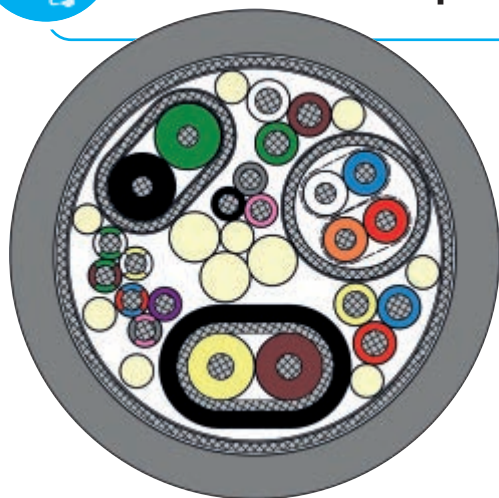


Cables for Robots


Our cable assembly



It doesn't matter if standard or special cable assembly, we produce high-quality cables to the ready-made product with connector. A high quality standard is very important for us and achieved by quality control.

As manufacturer of ready-made cables or complete cable assemblies we offer a broad range according to application field and your special demands.

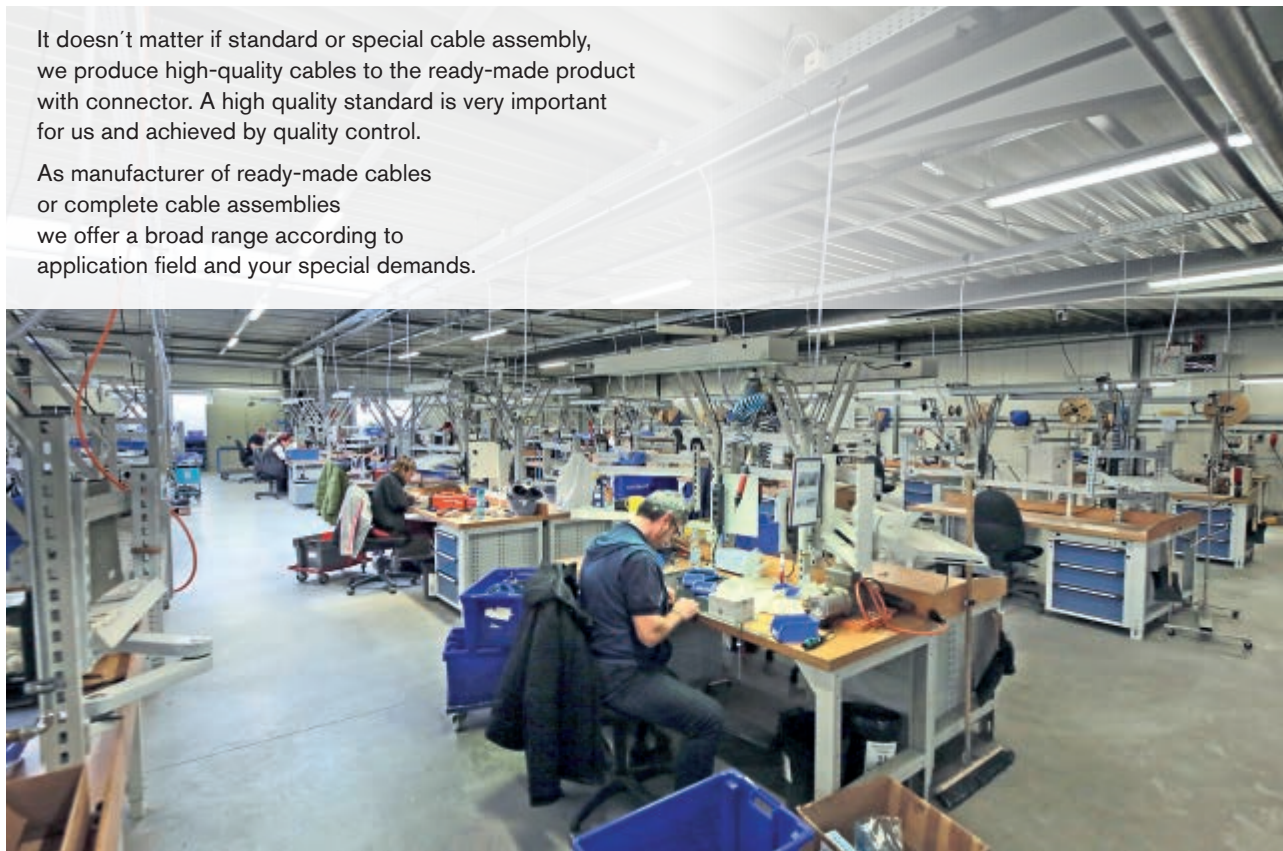

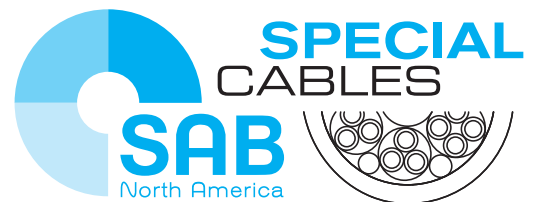

344 Kaplan Drive
Fairfield, NJ 07004
Toll Free: 866-722-2974
www.sabcable.com
info@sabcable.com