



Construction:

Conductor:	bare copper strands acc. to IEC 60228
Insulation:	TPE
Color code:	white conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334 and a green-yellow ground
Jacket material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Jacket color:	sky blue (RAL 5015)

item no.	dimension mm ²	outer-ø ≈ mm
03990157	3 x 1.0 + 4 x 0.5 + 3 x 3 x 0.5 + (2 x 0.5) D	12.1

Other dimensions and colors are possible on request.

Technical Data:

Peak operating voltage	Testing voltage	Temperature range	Min. bending radius	Absence of harmful substances
max. 500 V	conductor/conductor 1500 V conductor/shielding 1200 V	flexible application: -40/+90°C	recommended: 10 x O.D.	acc. to RoHS directive of the European Union



Further welding gun cables on request!

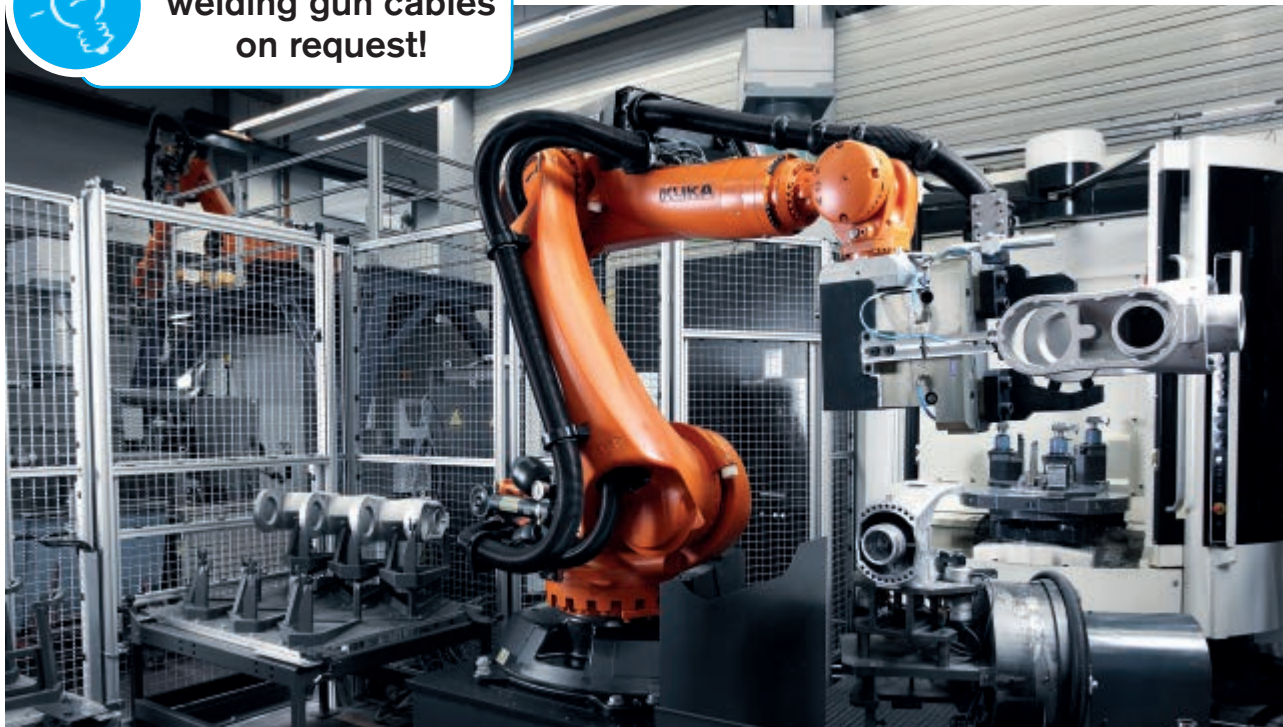


Foto: KUKA AG